Enable "AutoSource Switching" feature


In order to ensure that the screen starts the zebrix application under any circumstances (even after an electric restart, or a voluntary or involuntary source change, application crash, etc.), we recommend enabling the “AutoSource switching” function.

This function is intended to always automatically change the source of the screen to a predefined primary source or, if no signal on that source, to a predefined secondary source. Since zebrix can't be defined as the primary source, we can choose a source that will always be unused (HDMI1 for example) and set zebrix as a secondary source. The screen will try to display HDMI1, but because this source has no signal zebrix will be launched after a few seconds.

Procedure to enable the “AutoSource Switching” feature:



MENU > System > General > Auto Source Switching

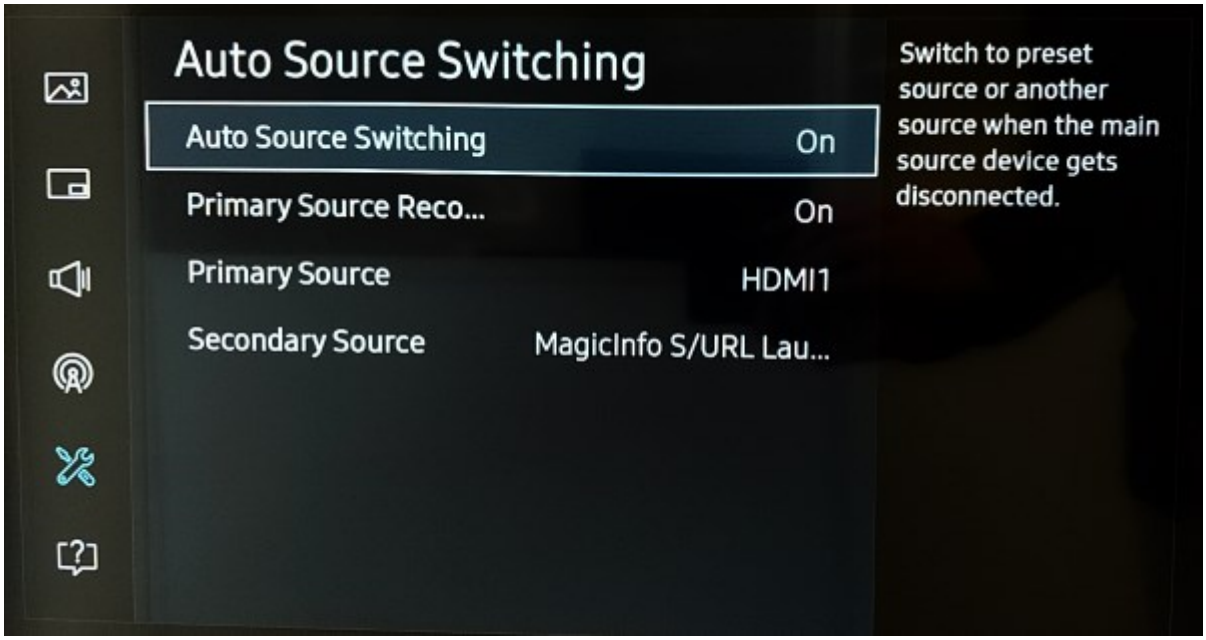

- Auto Source Switching : On
- Primary Source Recovery : On
- Primary Source : HDMI1
- Secondary Source : MagicInfo S / URL Launcher (= zebrix)

From:
https://documentation.zebrix.net/ - **zebrix signage documentation**

Permanent link:
https://documentation.zebrix.net/doku.php?id=en:enable_autosourceswitching&rev=1541500996

Last update: **2020/06/22 11:53**