


** SSSP SCREEN INITIAL SETUP **

This guide will allow you to perform the initial setup of an SSSP Screen, you can perform those steps after a factory reset.

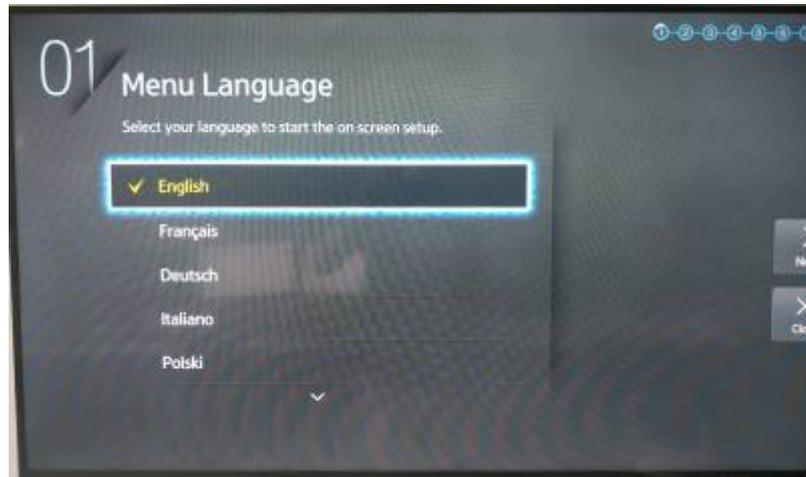

Step 1 : Choose your language

Step 2 : Choose your screen orientation



Step 3 : Disable the Auto Power Off

Step 4 : Choose the network adapter, if a RJ45 Network wire is connected, the screen will perform a network diagnostic. **The Screen need to be connected to Internet to reach Zebrix.**

Last update:

2020/06/30 en:sssp_screen_-_initial_setup https://documentation.zebrix.net/doku.php?id=en:sssp_screen_-_initial_setup&rev=1593532311
17:51



Step 6 (step 5 is skipped if you are connected to the internet) : define this option to 'URL Launcher'



you will need to use this URL : <http://screenv2.zebrix.net> , then press “Done”

Step 7 : Your screen is correctly configured. Pressing “OK” will send you to the “Home” Menu, from



wich you can start Zebrix. Press OK



Your screen should now appear on Zebrix, you can now manage it via the CMS.

From:
<https://documentation.zebrix.net/> - **zebrix documentation**

Permanent link:
https://documentation.zebrix.net/doku.php?id=en:sssp_screen_-_initial_setup&rev=1593532311

Last update: **2020/06/30 17:51**

