# SSSP SCREEN INITIAL SETUP

This guide will allow you to perform the initial setup of an SSSP Screen, you can perform those steps after a factory reset.

## Step 1 : Choose your language



## Step 2 : Choose your screen orientation



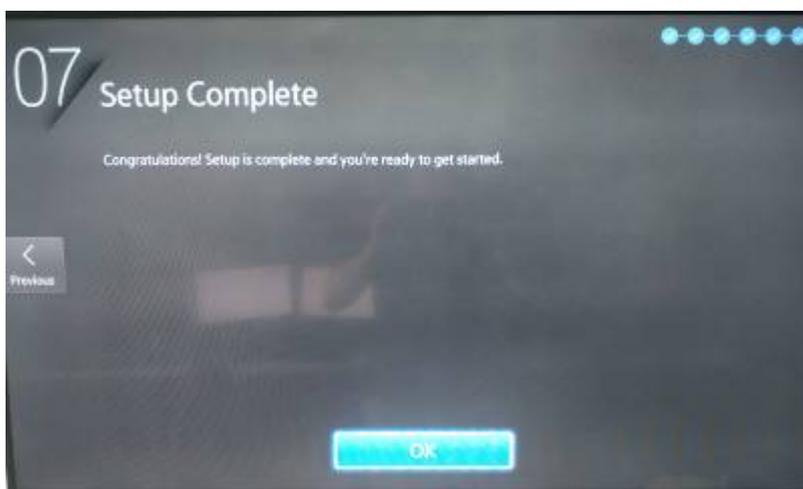## Step 3 : Disable the Auto Power Off

## Step 4 : Choose the network adapter

 If a RJ45 Network wire is connected, the
screen will perform a network diagnostic. **The Screen need to be connected to Internet to reach
Zebrix.**

## Step 6 (step 5 is skipped if you are connected to the internet) : define this option to 'URL Launcher'

you will need to use this URL : http://screenv2.zebrix.net , then press "Done"

## Step 7 : Your screen is correctly configured

Pressing "OK" will send you to the "Home" Menu, from wich you can start Zebrix. Press OK Your screen should now appear on Zebrix, you can now manage it via the CMS.

From:
https://documentation.zebrix.net/ - **zebrix documentation**

Permanent link:
**https://documentation.zebrix.net/doku.php?id=en:sssp_screen_-_initial_setup&rev=1758117349**

Last update: **2025/09/17 15:55**