


SSSP SCREEN INITIAL SETUP

This guide will allow you to perform the initial setup of an SSSP Screen, you can perform those steps after a factory reset.

Step 1 : Choose your language

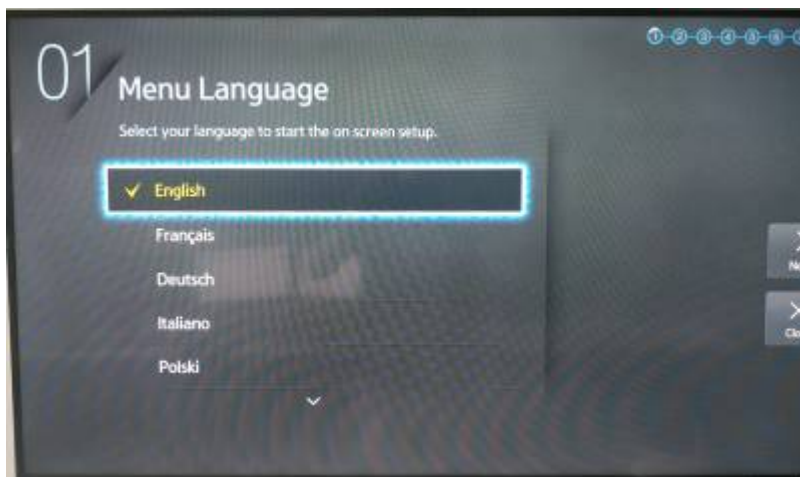

Step 2 : Choose your screen orientation



Step 3 : Disable the Auto Power Off



Step 4 : Choose the network adapter



If a RJ45 Network wire is connected, the screen will perform a network diagnostic. **The Screen need to be connected to Internet to reach Zebrix.**

Step 6 (step 5 is skipped if you are connected to the internet) : define this option to 'URL Launcher'

you will need to use this URL : <http://screenv2.zebrix.net> , then press “Done”





Step 7 : Your screen is correctly configured

Pressing “OK” will send you to the “Home” Menu, from wick you can start Zebrix. Press OK Your screen should now appear on Zebrix, you can now manage it via the CMS.

From:
<https://documentation.zebrix.net/> - **zebrix documentation**

Permanent link:
https://documentation.zebrix.net/doku.php?id=en:sssp_screen_-_initial_setup&rev=1758117349

Last update: **2025/09/17 15:55**

