
Initial Setup – Tizen 7 Screen

Follow the steps below using the Samsung remote control.

1 - Language Selection


Use the arrow keys to scroll and select “French” with the OK button (between the arrows).

Press the right arrow to proceed to the next menu.

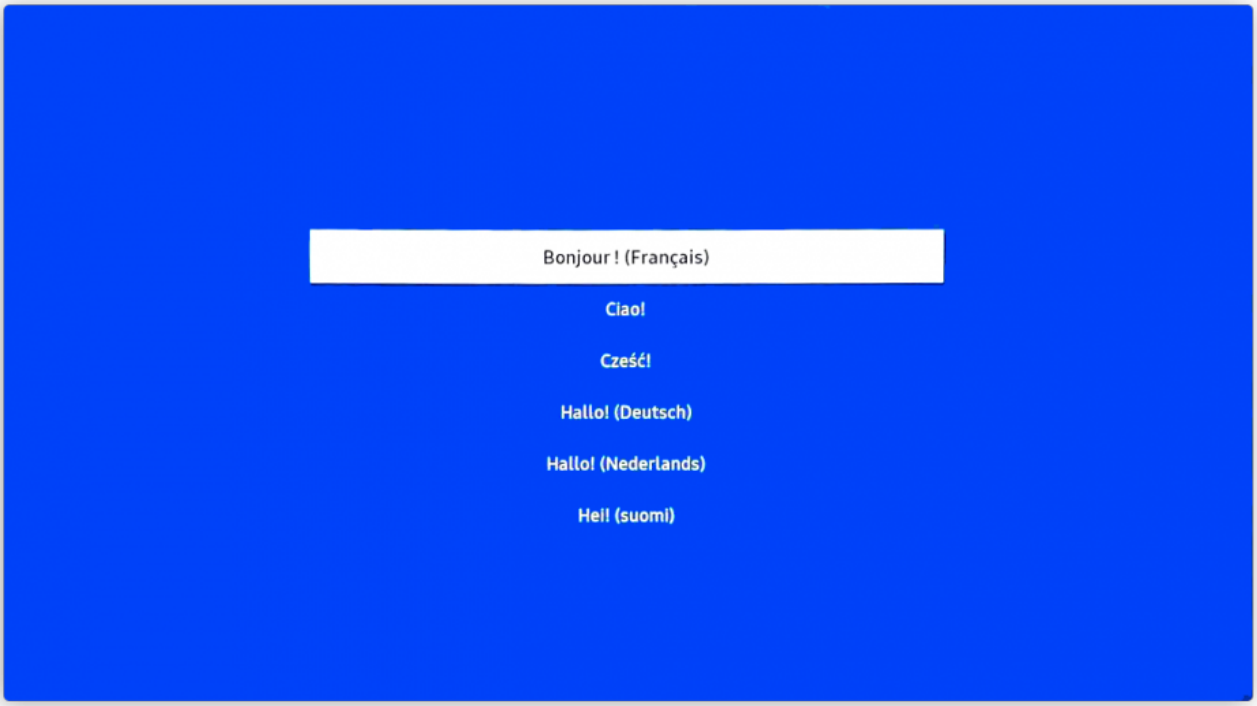


2 - Connect to a Network


You can connect the device via a wireless network (Wi-Fi) or a wired connection (RJ45) depending on your setup. Select the option with the OK button.

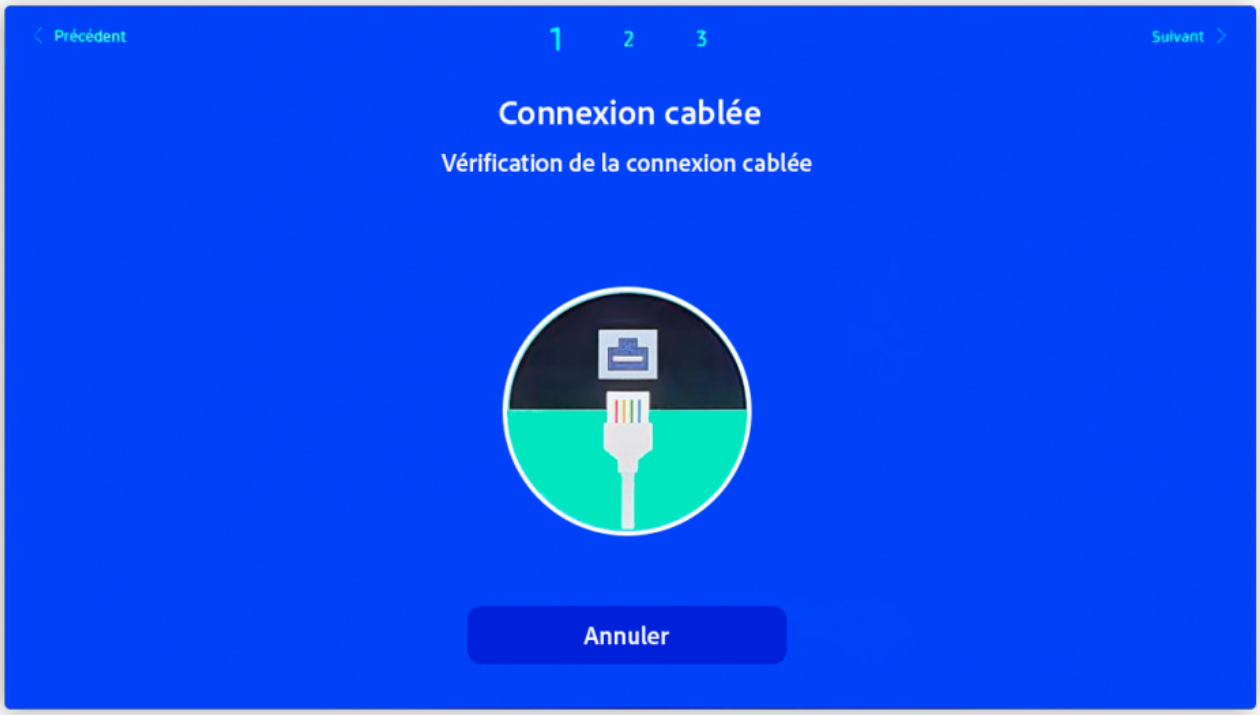


Wired: The screen will check the network status. If everything is OK, press the right arrow to continue.

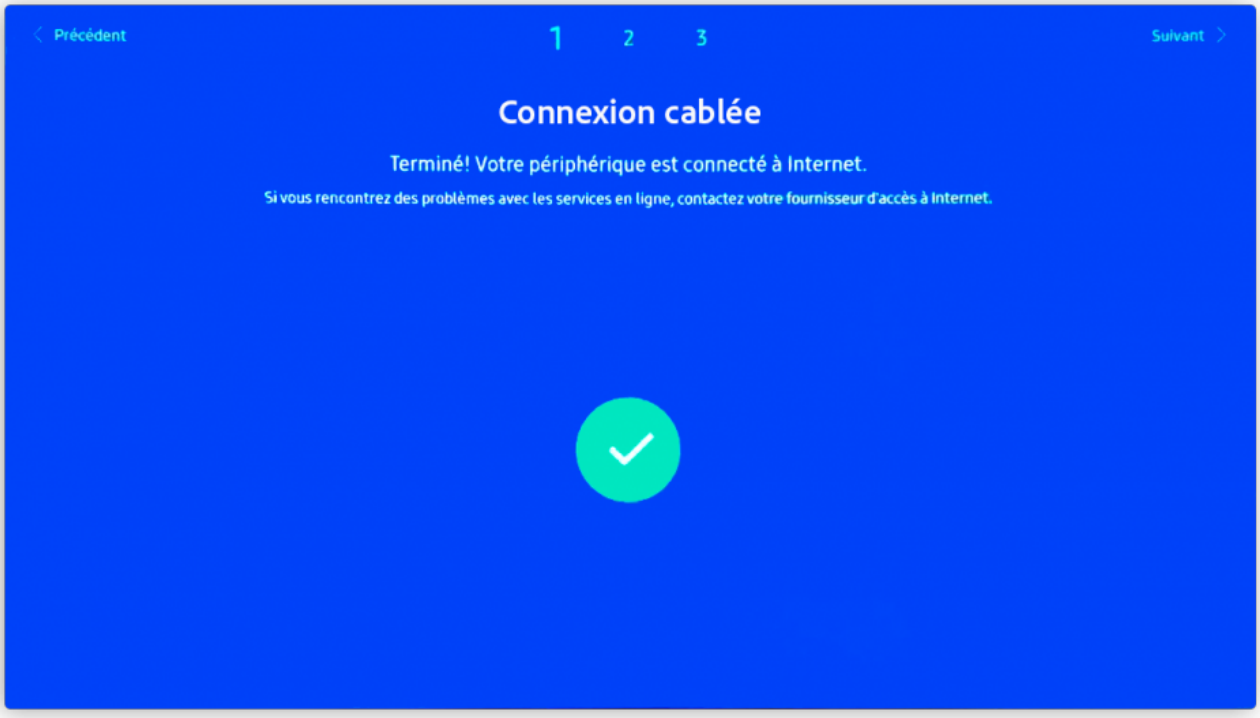

Wi-Fi: Select your network and enter the password, then press Finish. (A secure Wi-Fi connection is required.) The screen will verify the connection; if everything is OK, press the right arrow to continue.

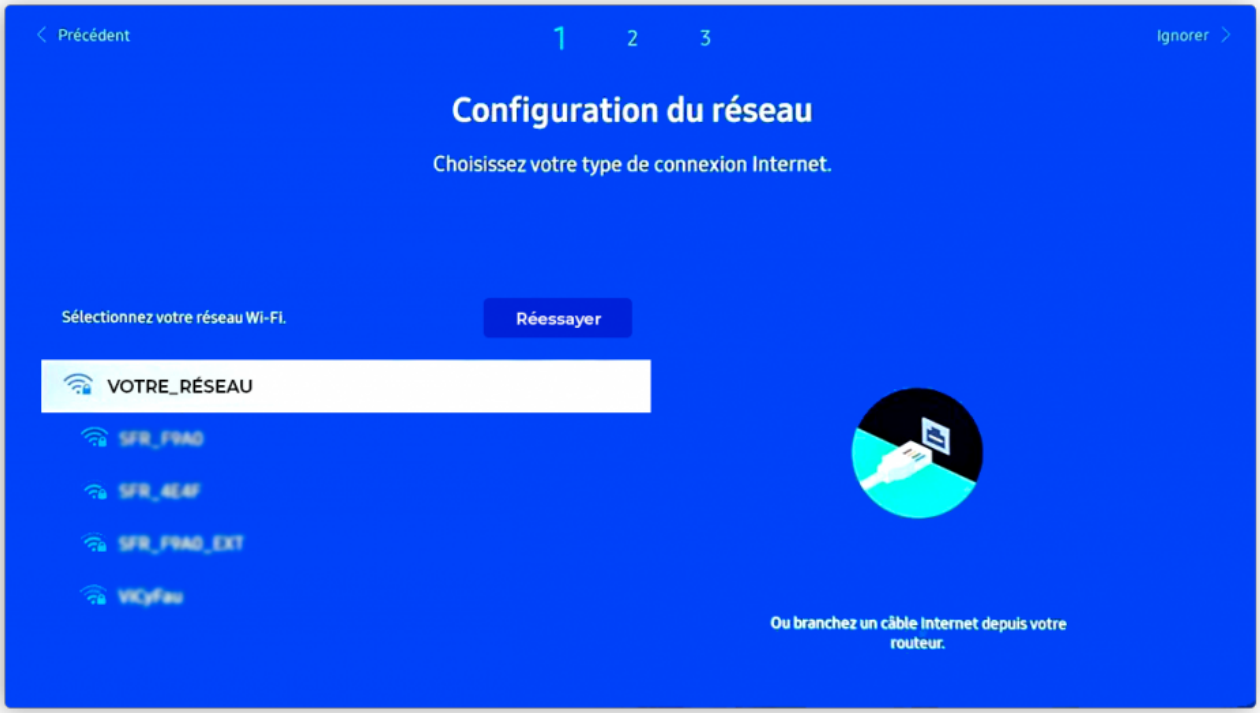
Précédent
1 2 3
Ignorer
Configuration du réseau
Choisissez votre type de connexion Internet.
Sélectionnez votre réseau Wi-Fi.
Réessayer
VOTRE_RÉSEAU
Ou branchez un câble Internet depuis votre routeur.


Précédent
1 2 3
Ignorer
Configuration du réseau
Choisissez votre type de connexion Internet.
Sélectionnez votre réseau Wi-Fi.
Réessayer
Entrez le mot de passe pour SFR_012F.
13/63
Afficher MDP
English
Aller à

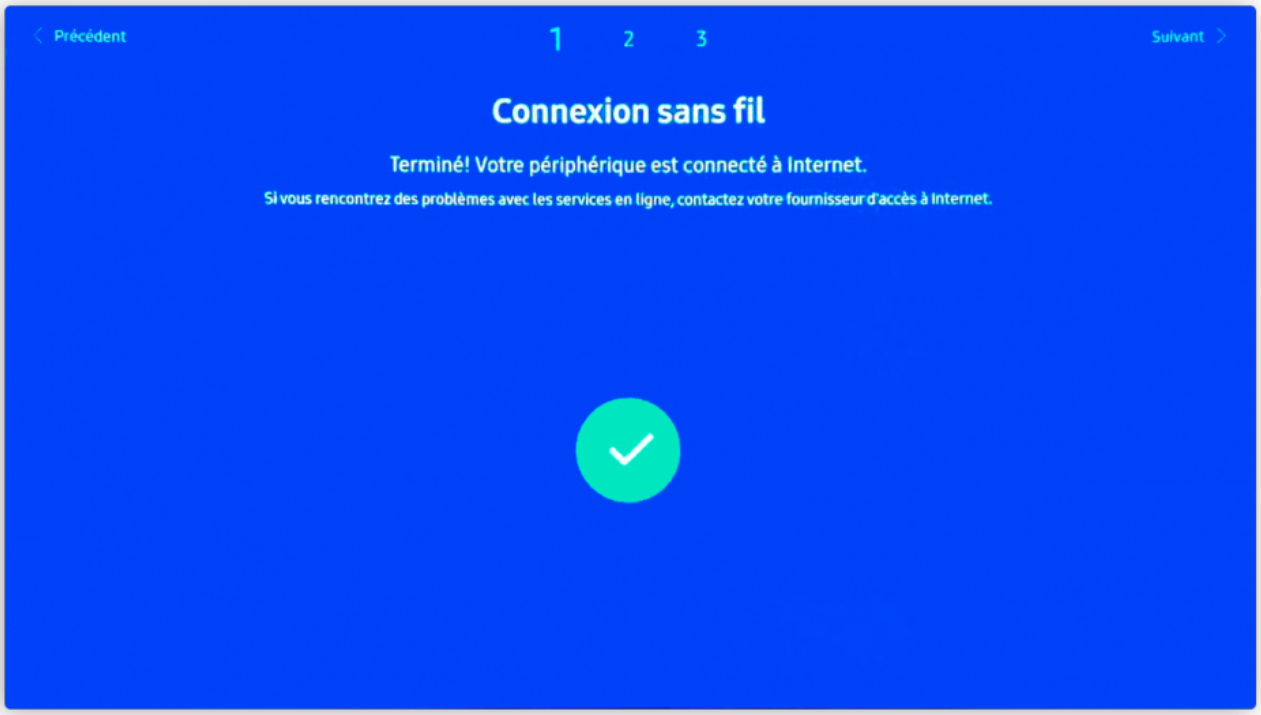

- For connection issues, contact Manganelli support at 03.20.41.59.69


3 - Smart Signage Privacy Notice

Press OK, then the right arrow to continue.



4 - Installation Type

Select “Manual Setup” with the OK button.

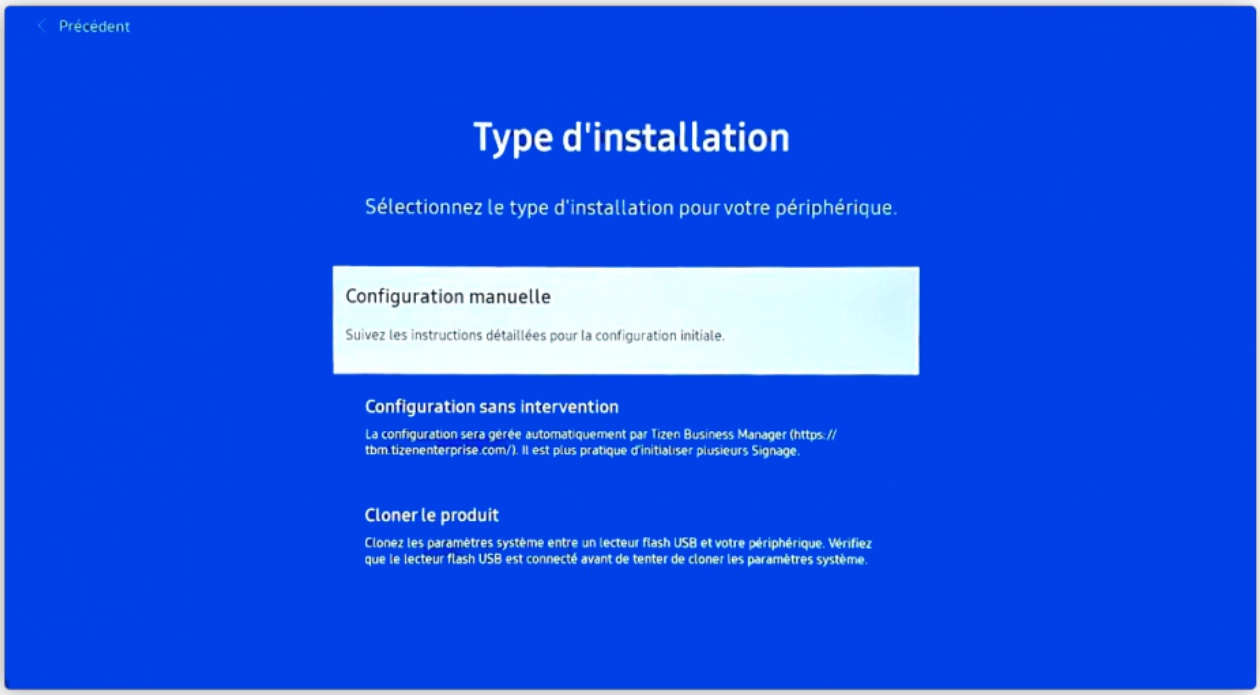

5 - Display Orientation


Choose portrait or landscape according to your setup and confirm.

Press the right arrow to proceed.



6 - Player Selection

Select “Custom Application” with the OK button.

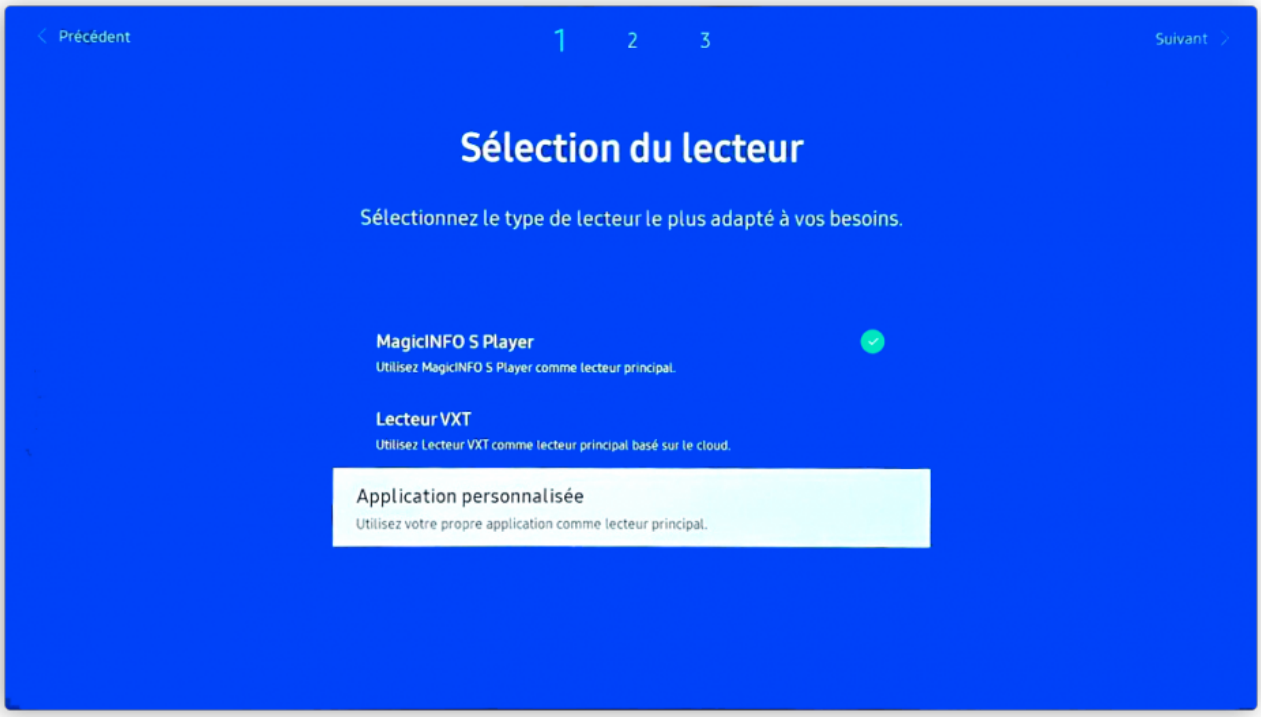


Enter the Zebrix server URL:

USA: http://screen.zebrix.us

Europe: http://screen.zebrix.net


Click “Finish.”

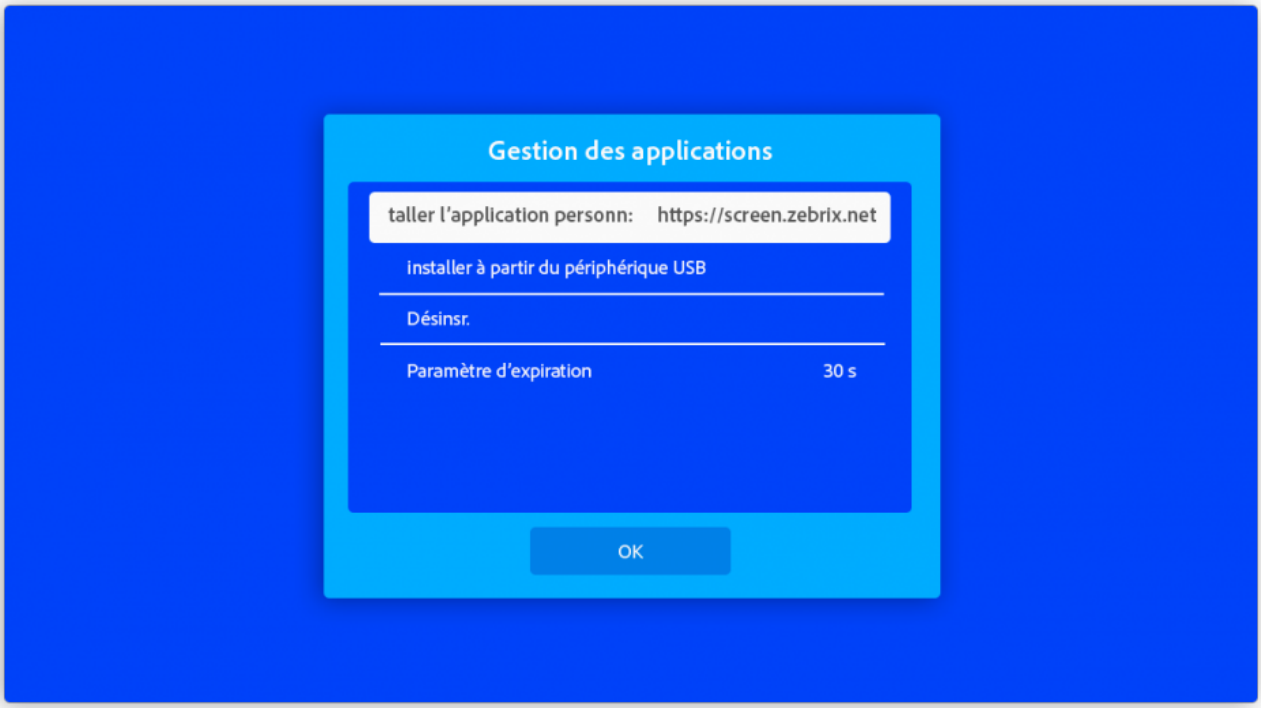

7 - Configure the RM Server


Enter the server address: rm.manganelli.com:7001

Press “Finish” and then the right arrow to continue.

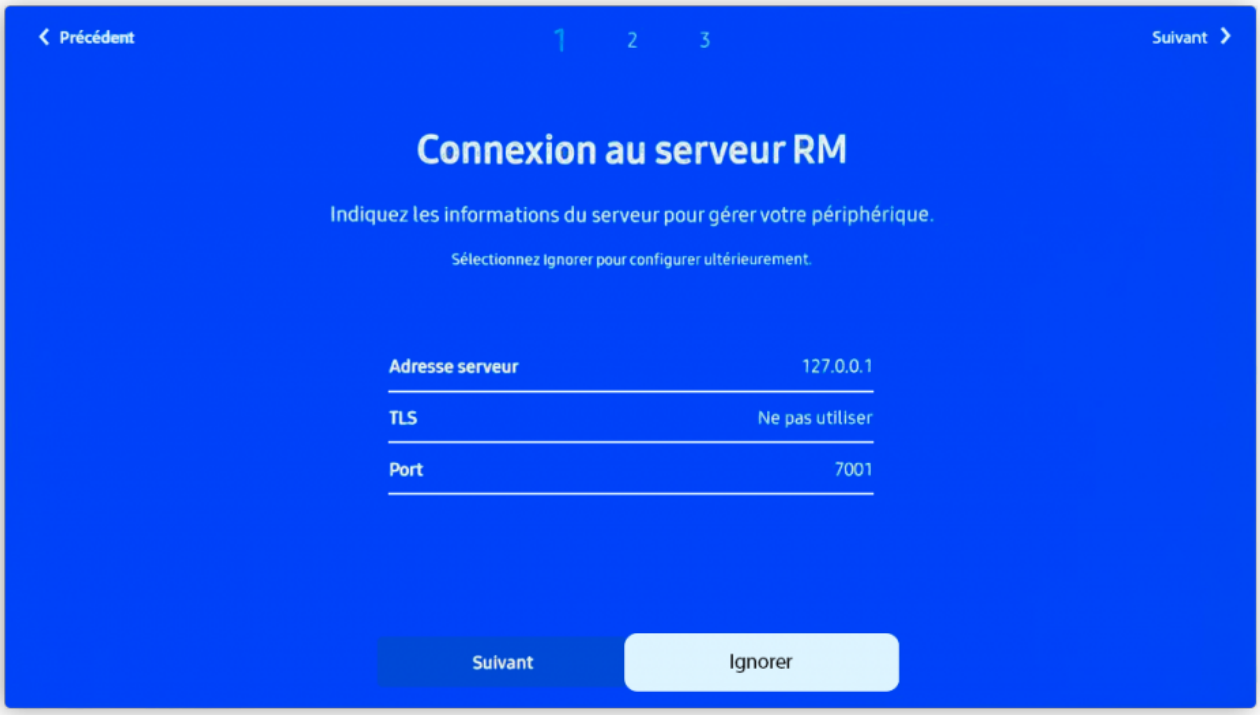


8 - Server Device

No action needed, just press the right arrow.

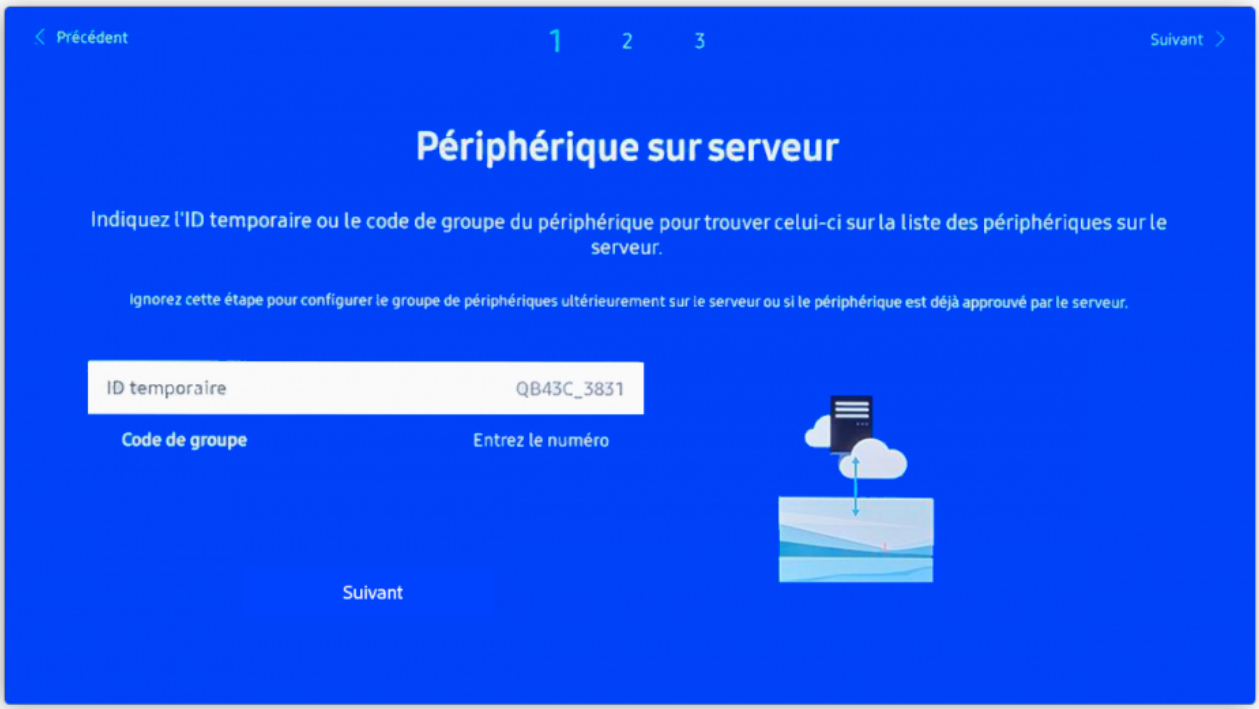

9 - Power Off Settings


Select “Off” and press the right arrow to continue.

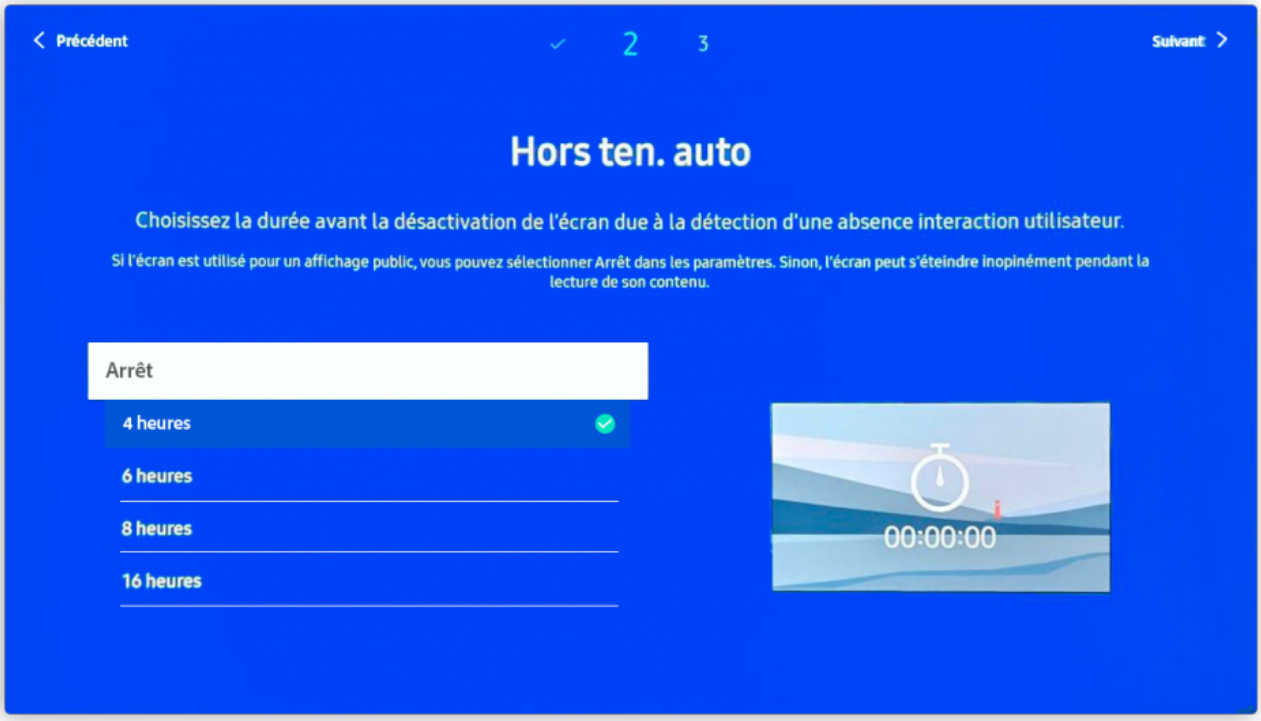

10 - Date and Time Settings

Use the arrows to set the correct date and time. ⚠ Incorrect settings may cause display issues.

Press the right arrow to continue.

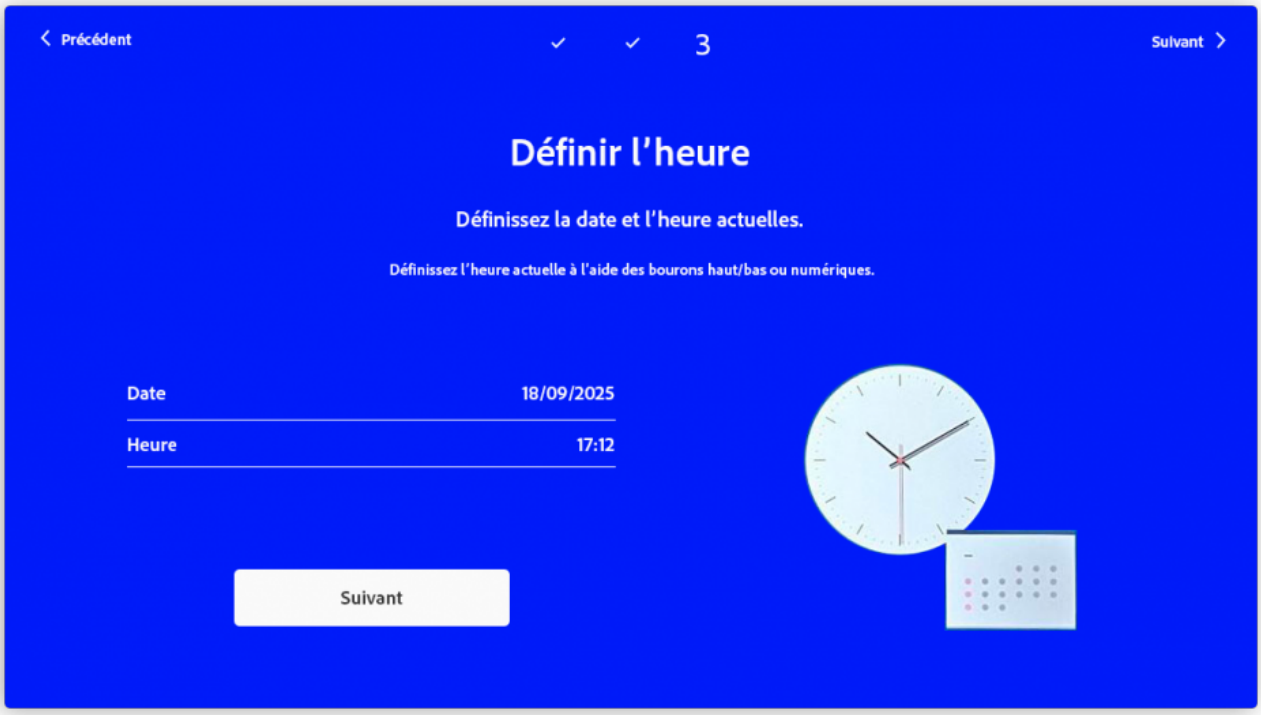


11 - Pin Code

No action needed, just press the right arrow.




12 - Auto Source Change

Press MENU, navigate to System > Auto Source Change.

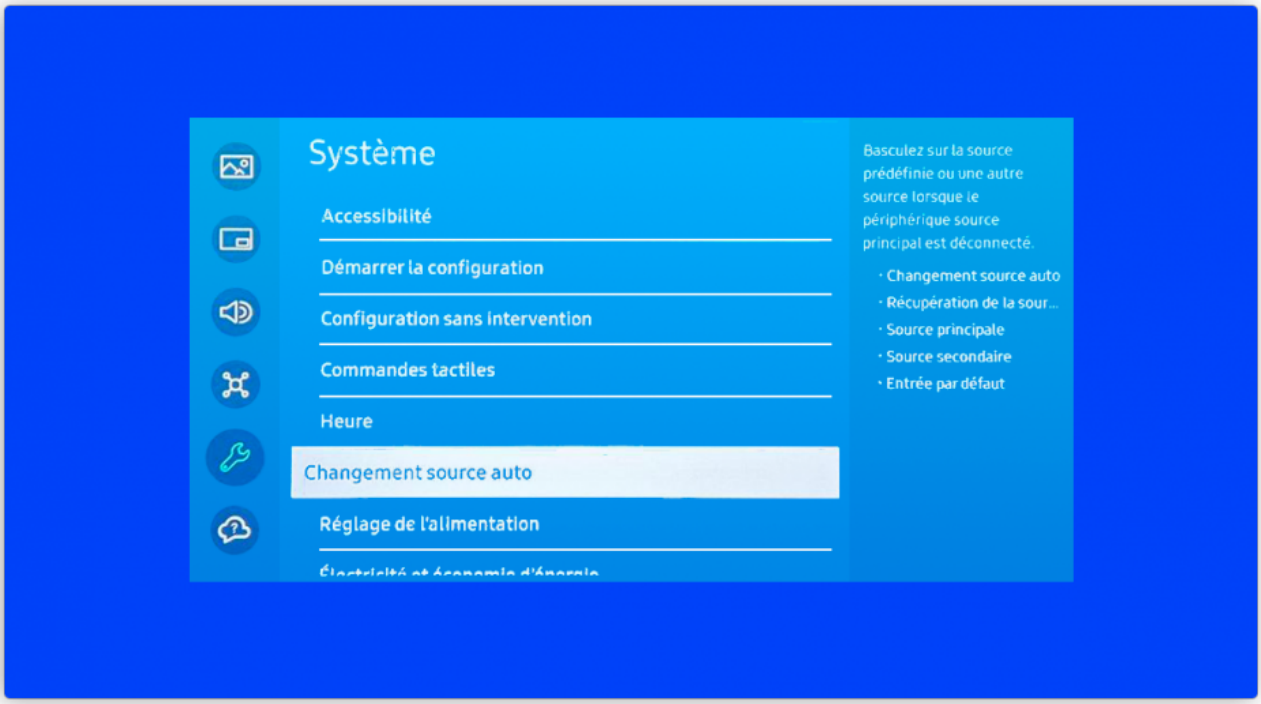


Select Auto Source Change > New Input.

Use the arrows to select Default Input > Custom Application.

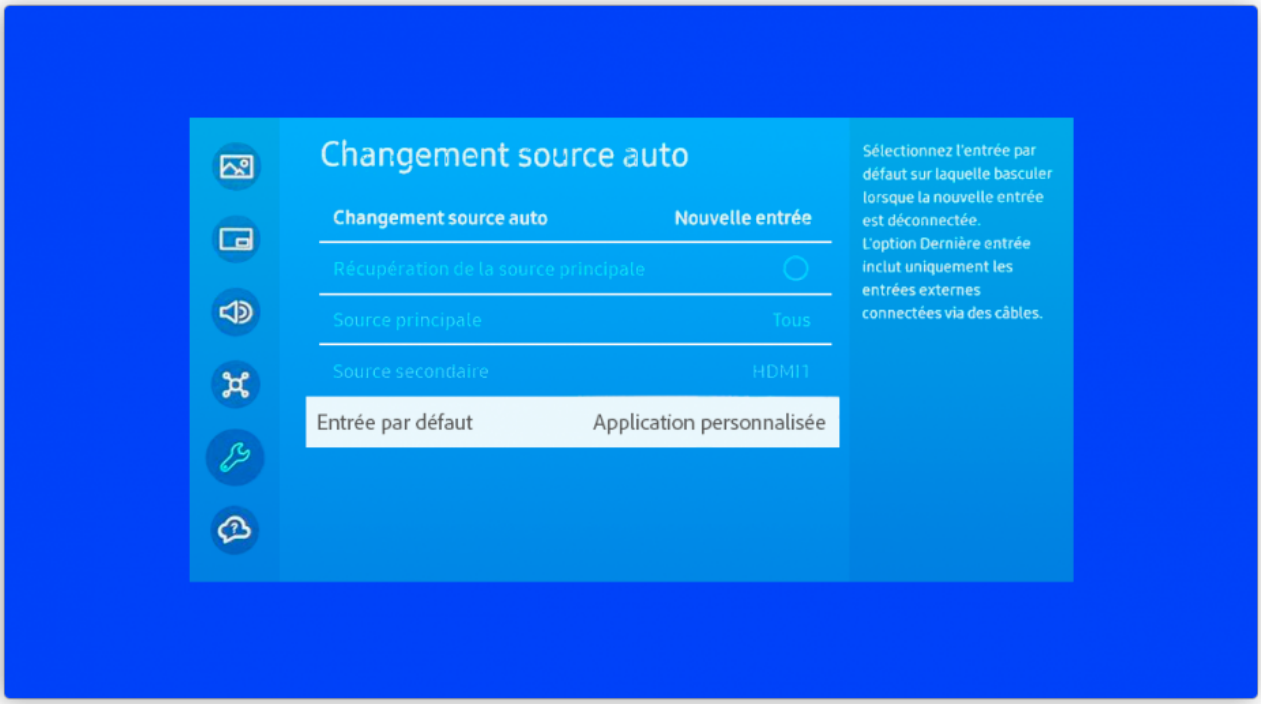


13 - Set Up Wake-Up Timer

Press HOME, then navigate to Settings > Prog. On/Off using the right arrow.

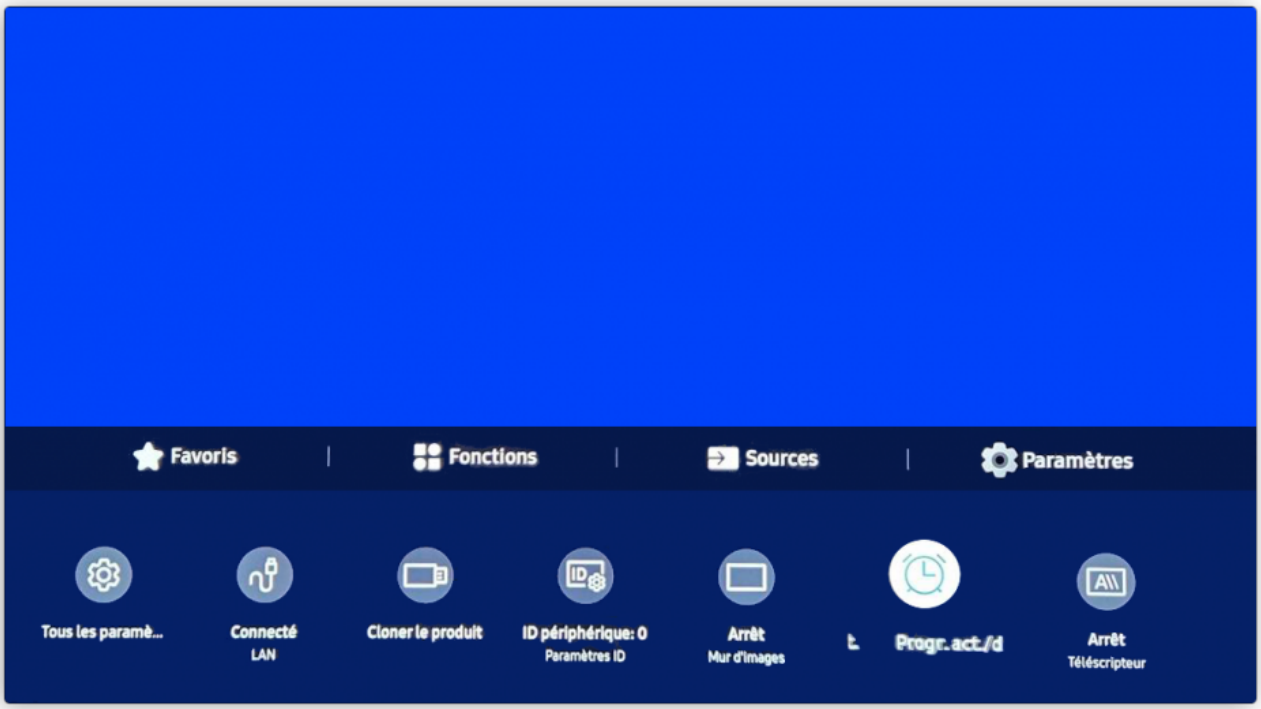



Select Prog. On.

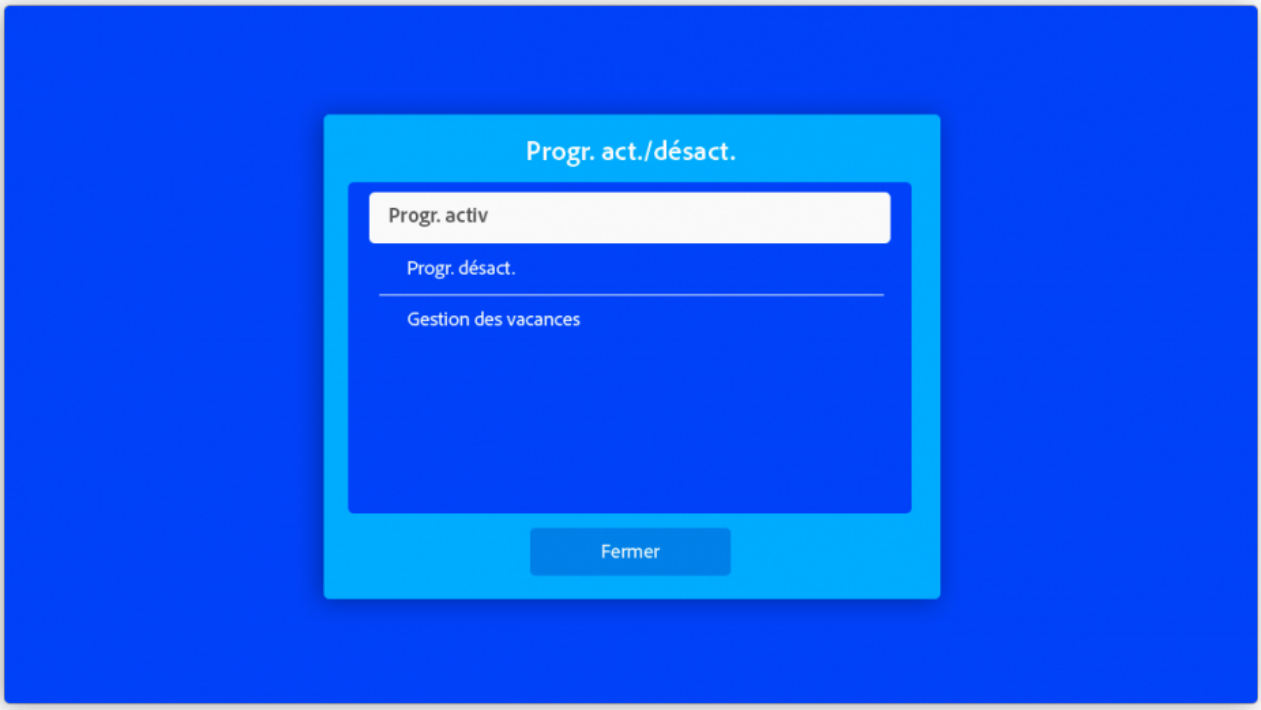

For Prog. On 1 and Prog. On 2, change from “Do not use” to select the days and set wake-up times


according to the business hours.

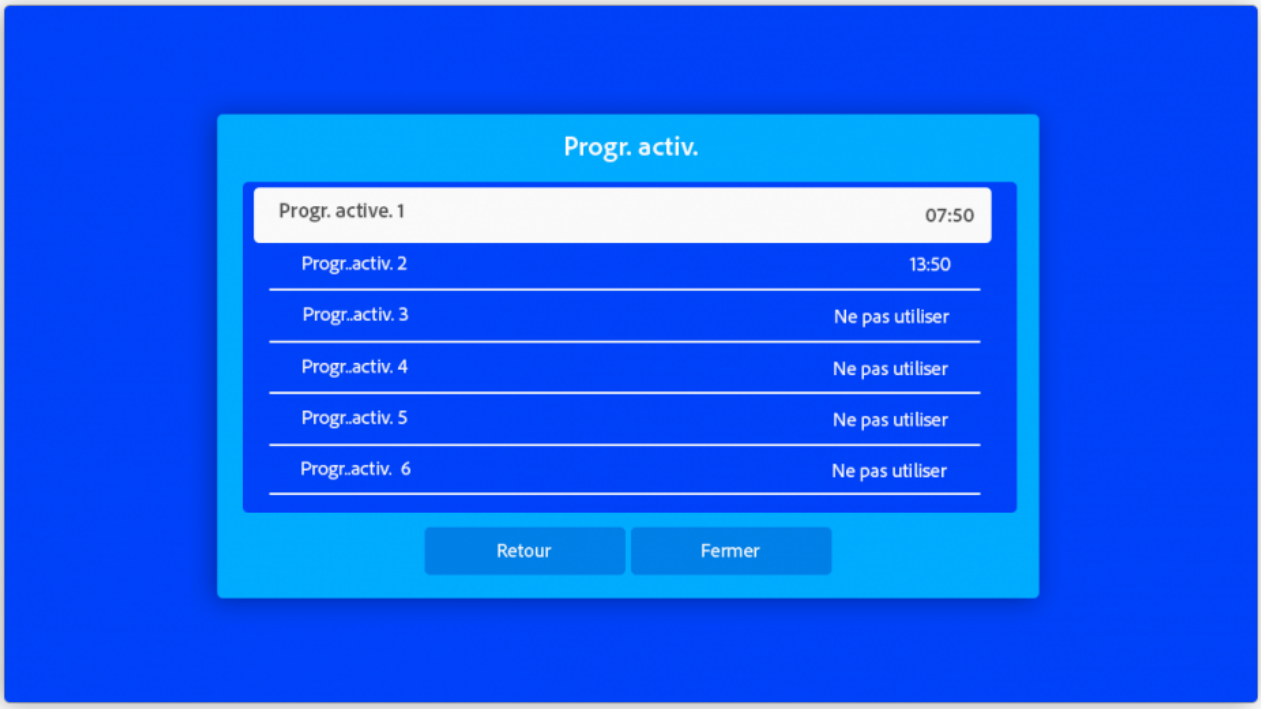

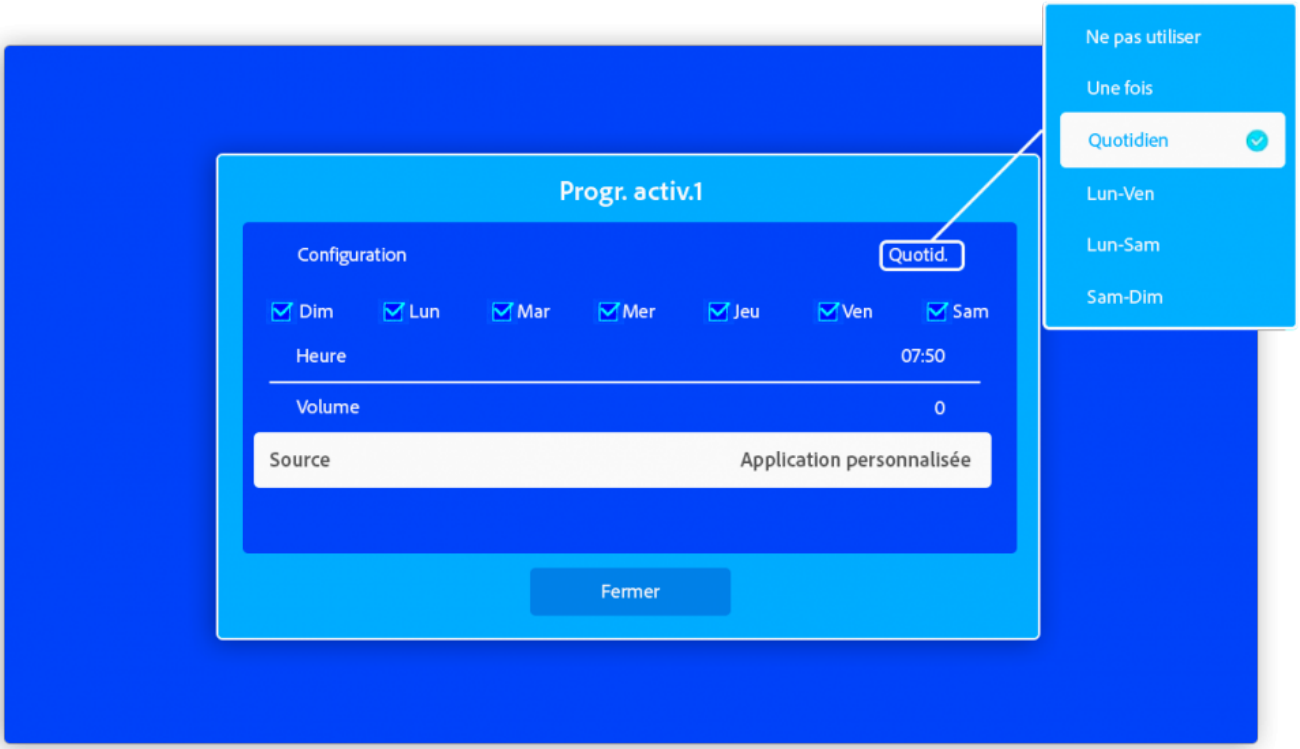

14 - Power Settings

Press MENU, navigate to System > Power Settings.

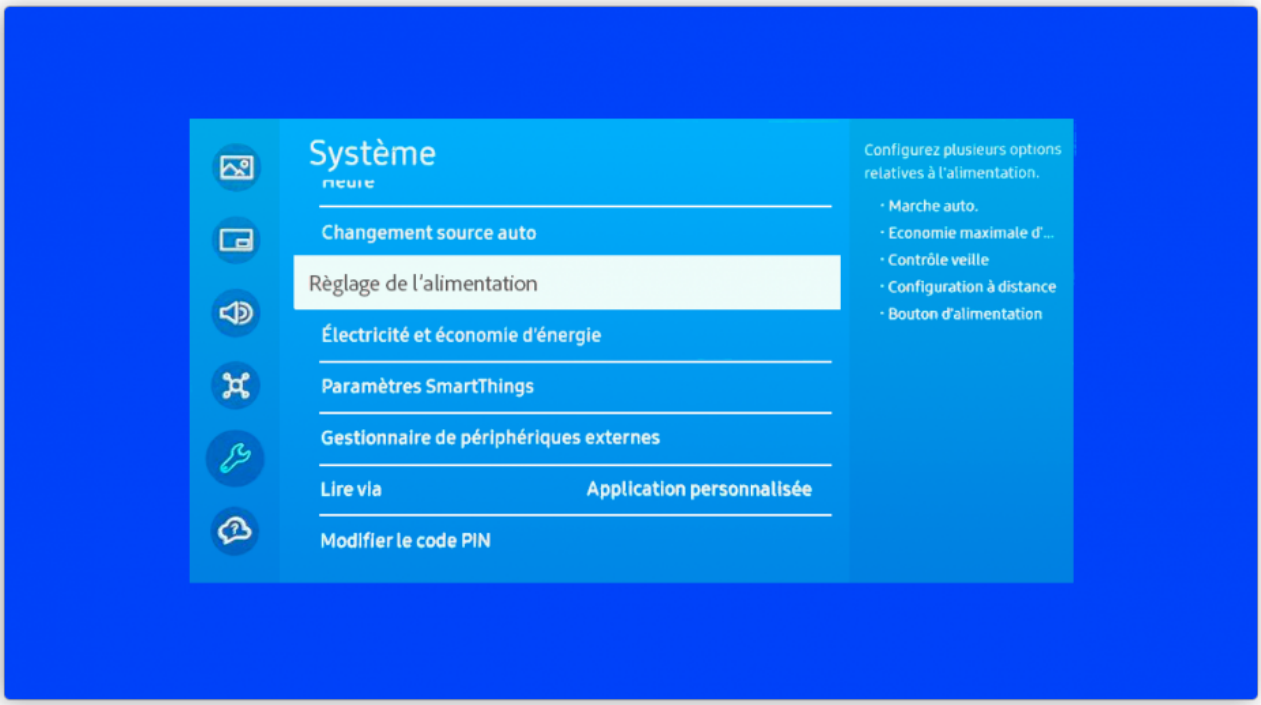

Enable the settings as shown in the image.





 Configuration is complete!



Launch the app by pressing “Home.”


Go to the “Functions” tab and select “Custom APP.”

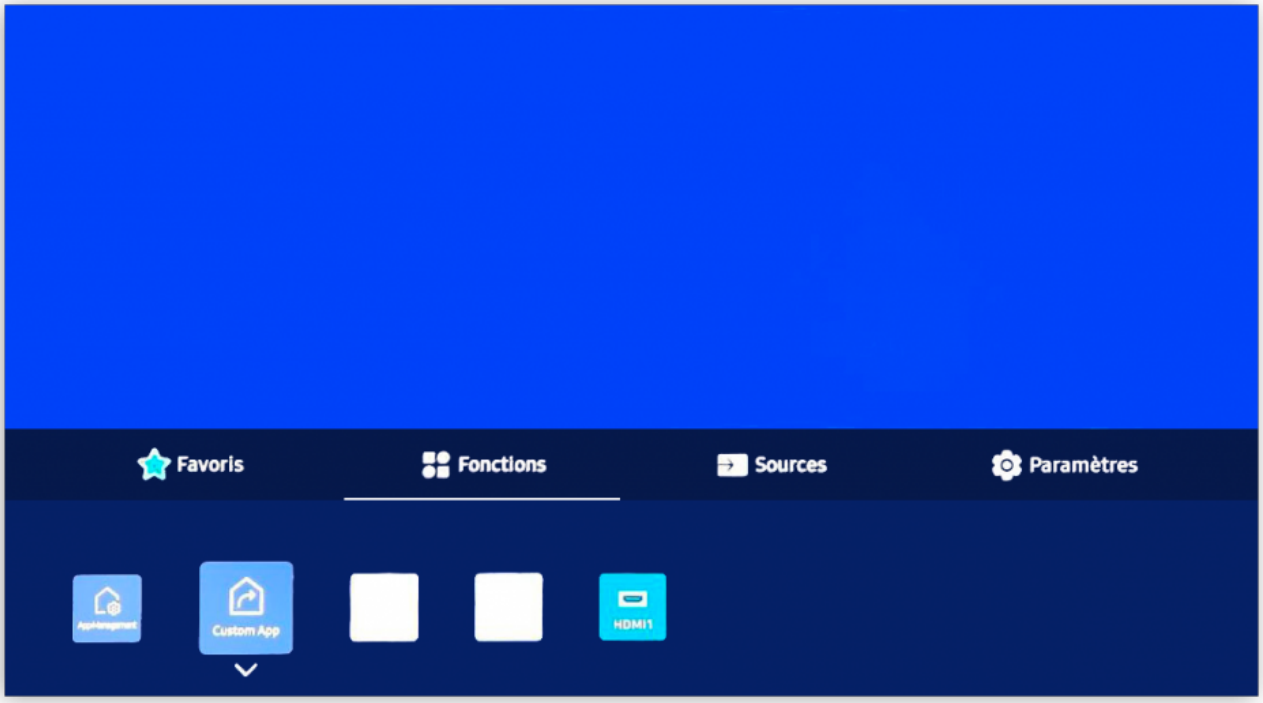

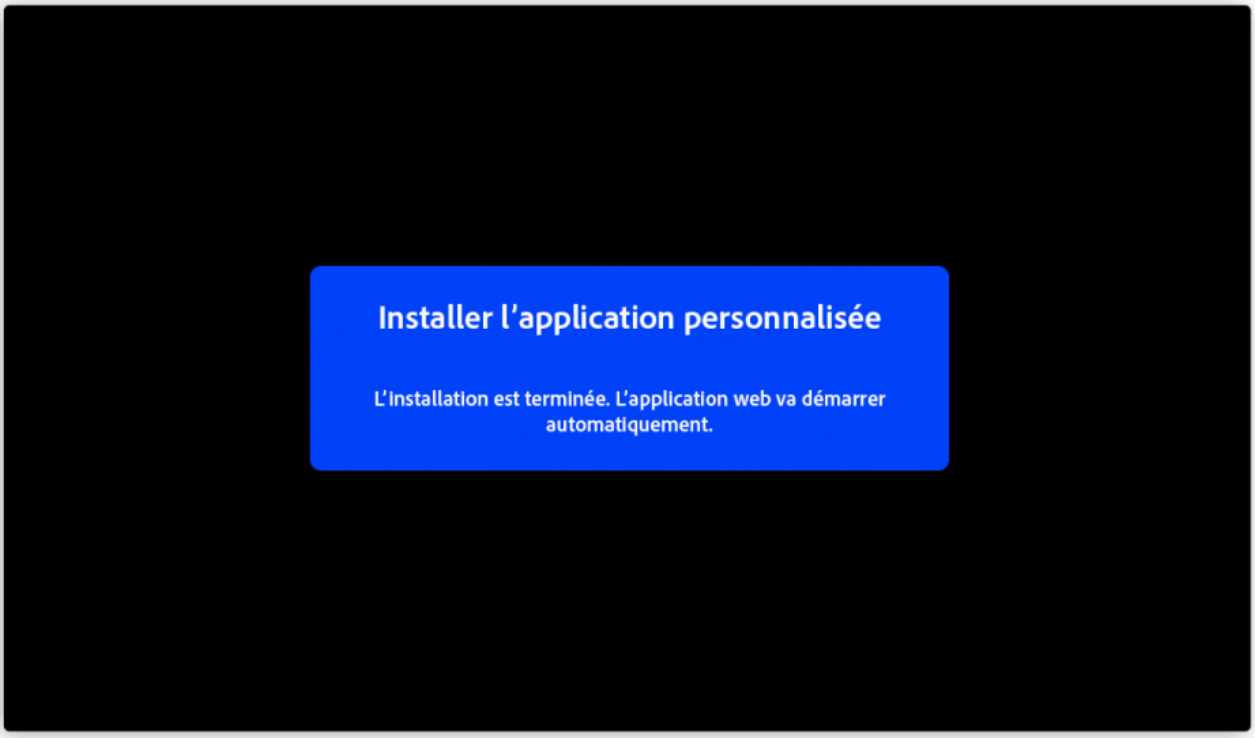

Once the app is launched, the content will be displayed.

If this setup is during an installation, the screen may request activation. Contact support if this occurs.

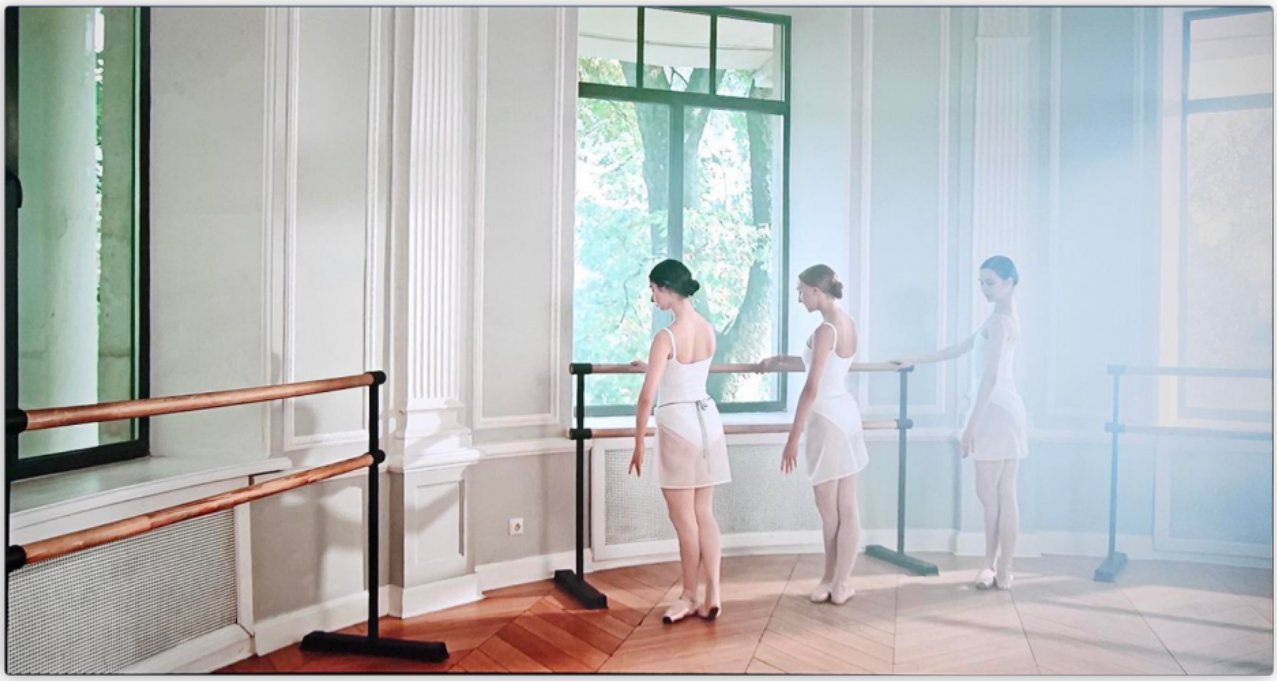

From:
https://documentation.zebrix.net/ - **zebrix signage documentation**

Permanent link:
https://documentation.zebrix.net/doku.php?id=en:configuration_initiale_ecrans_tizen7

Last update: **2025/10/09 18:13**