


Initial configuration Tizen 7 screen

The following operations must be carried out using the Samsung remote control


1 - Language selection

- Scroll down using the arrows and select “Français” using the OK button (located between the arrows). - Right arrow to move on to the next menu

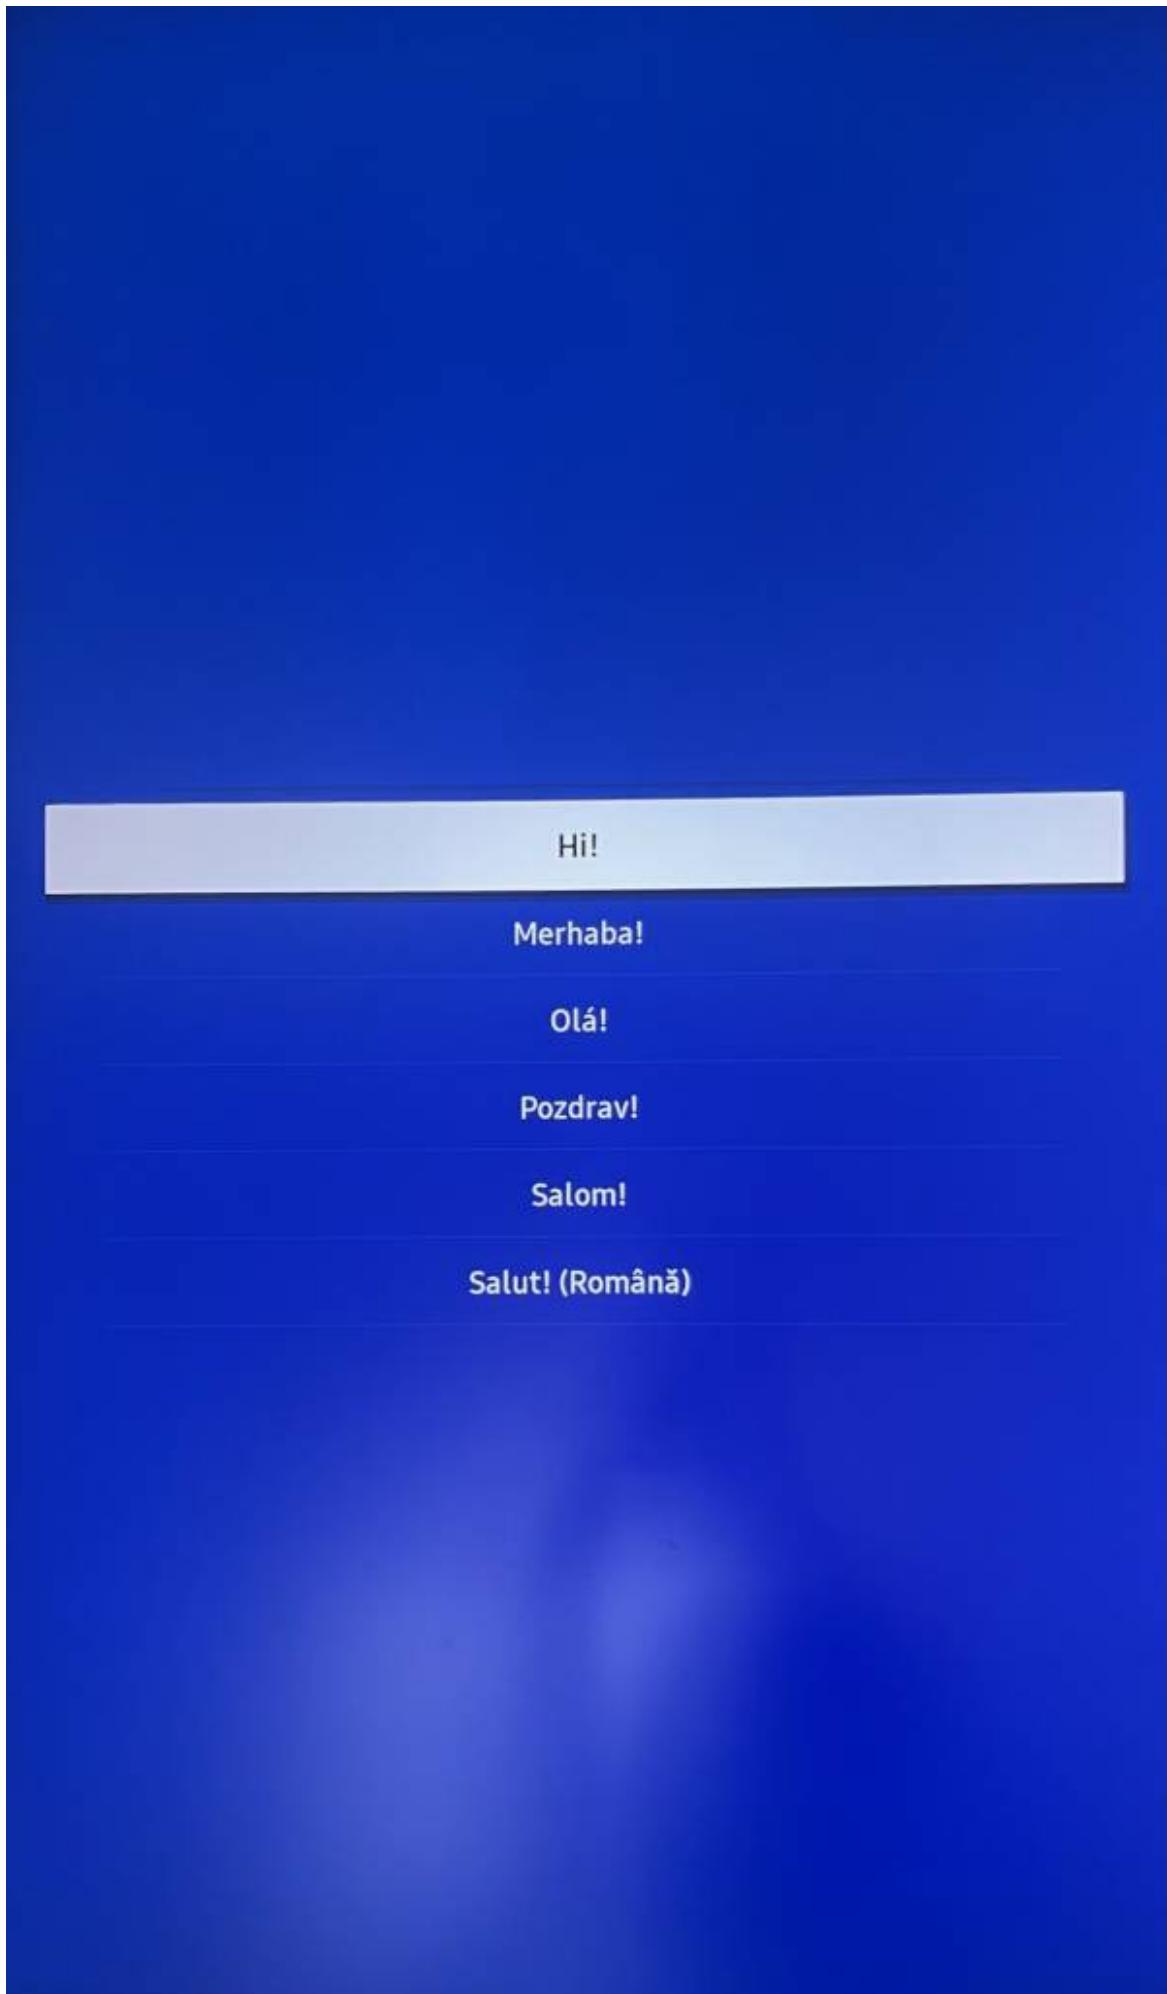


2 - Connecting to an internet network

The equipment can be connected either to a “wireless” network (Wifi) or to a wired network (RJ45) depending on your type of connection, select the option with the Ok button.

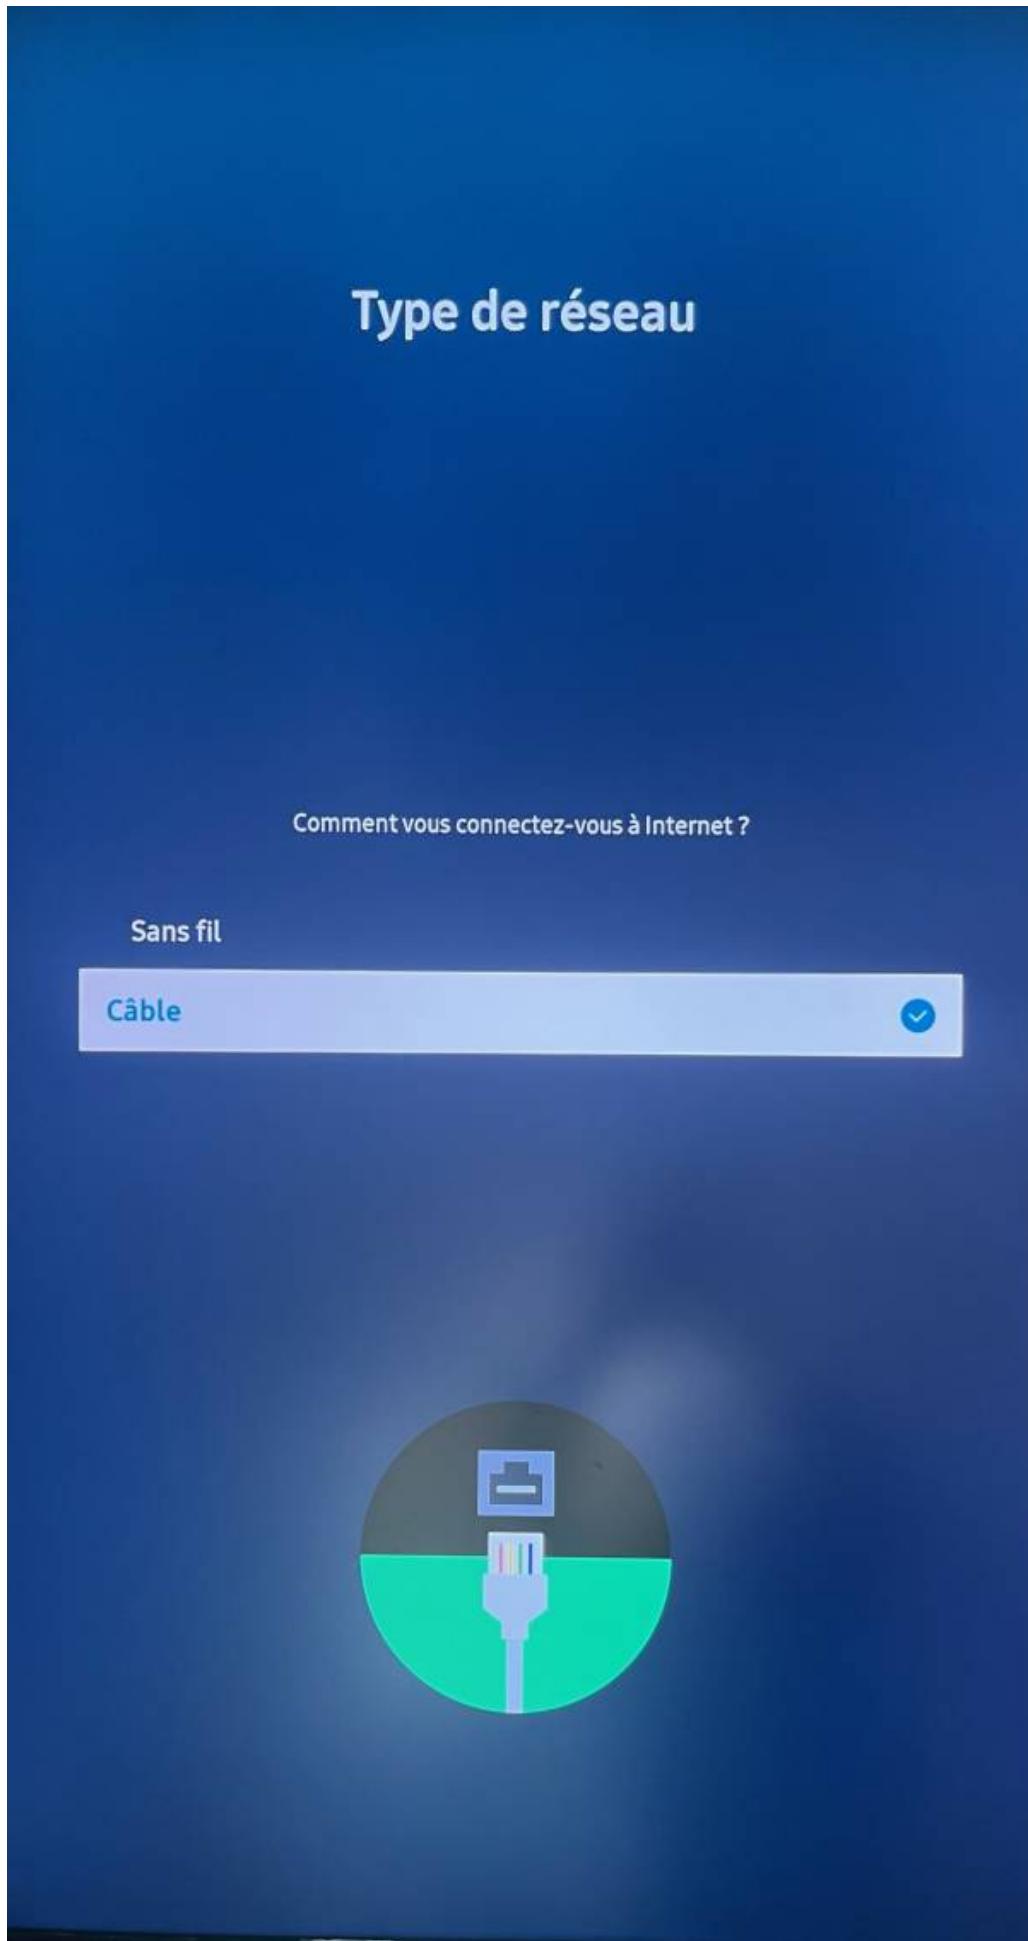


- If the screen is wired, it will perform a network status, if everything is ok, you will have to do

next with the right arrow.

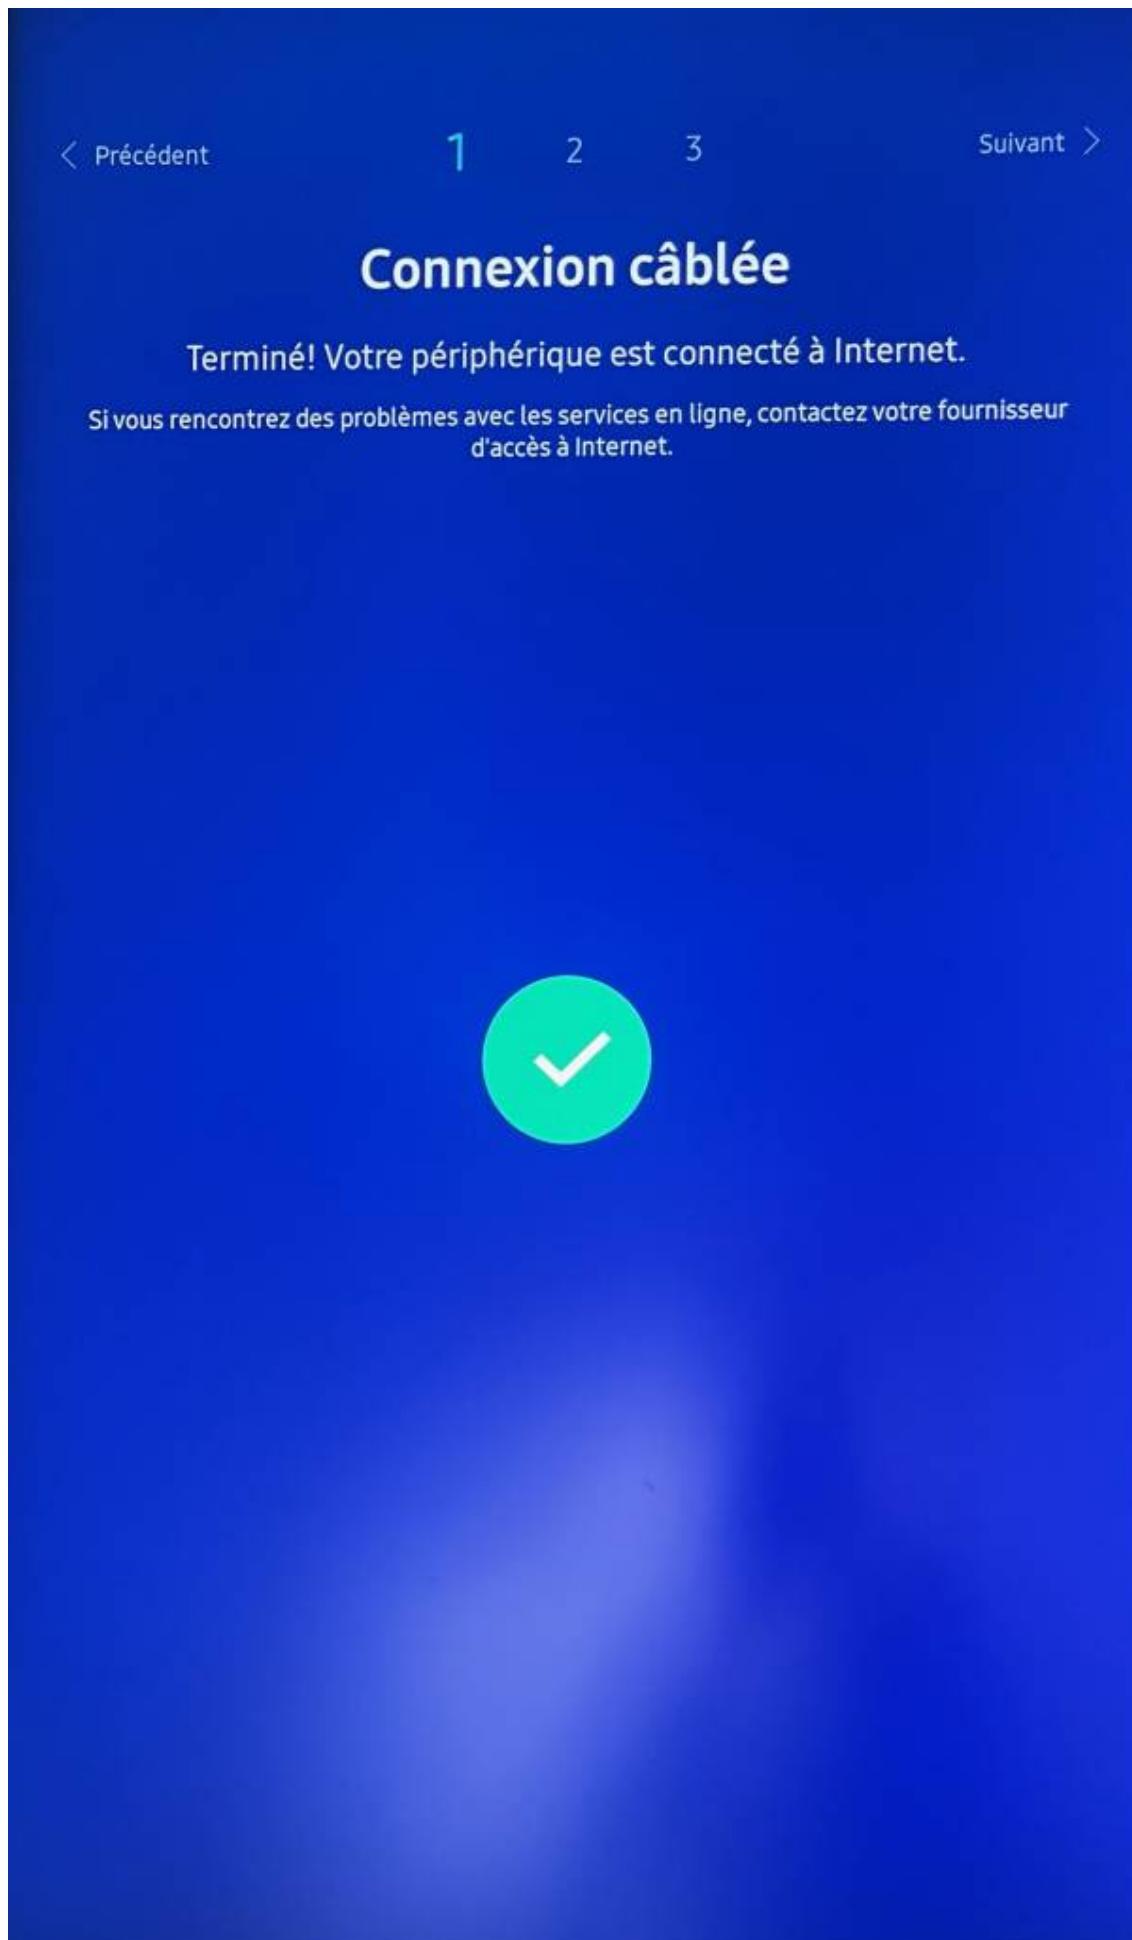

- If the screen is connected via Wifi, select your Wifi network, then enter your password before


finishing. (The screen must be connected to a secure Wifi network). It will perform a network status, if everything is ok, you will have to do next with the right arrow.

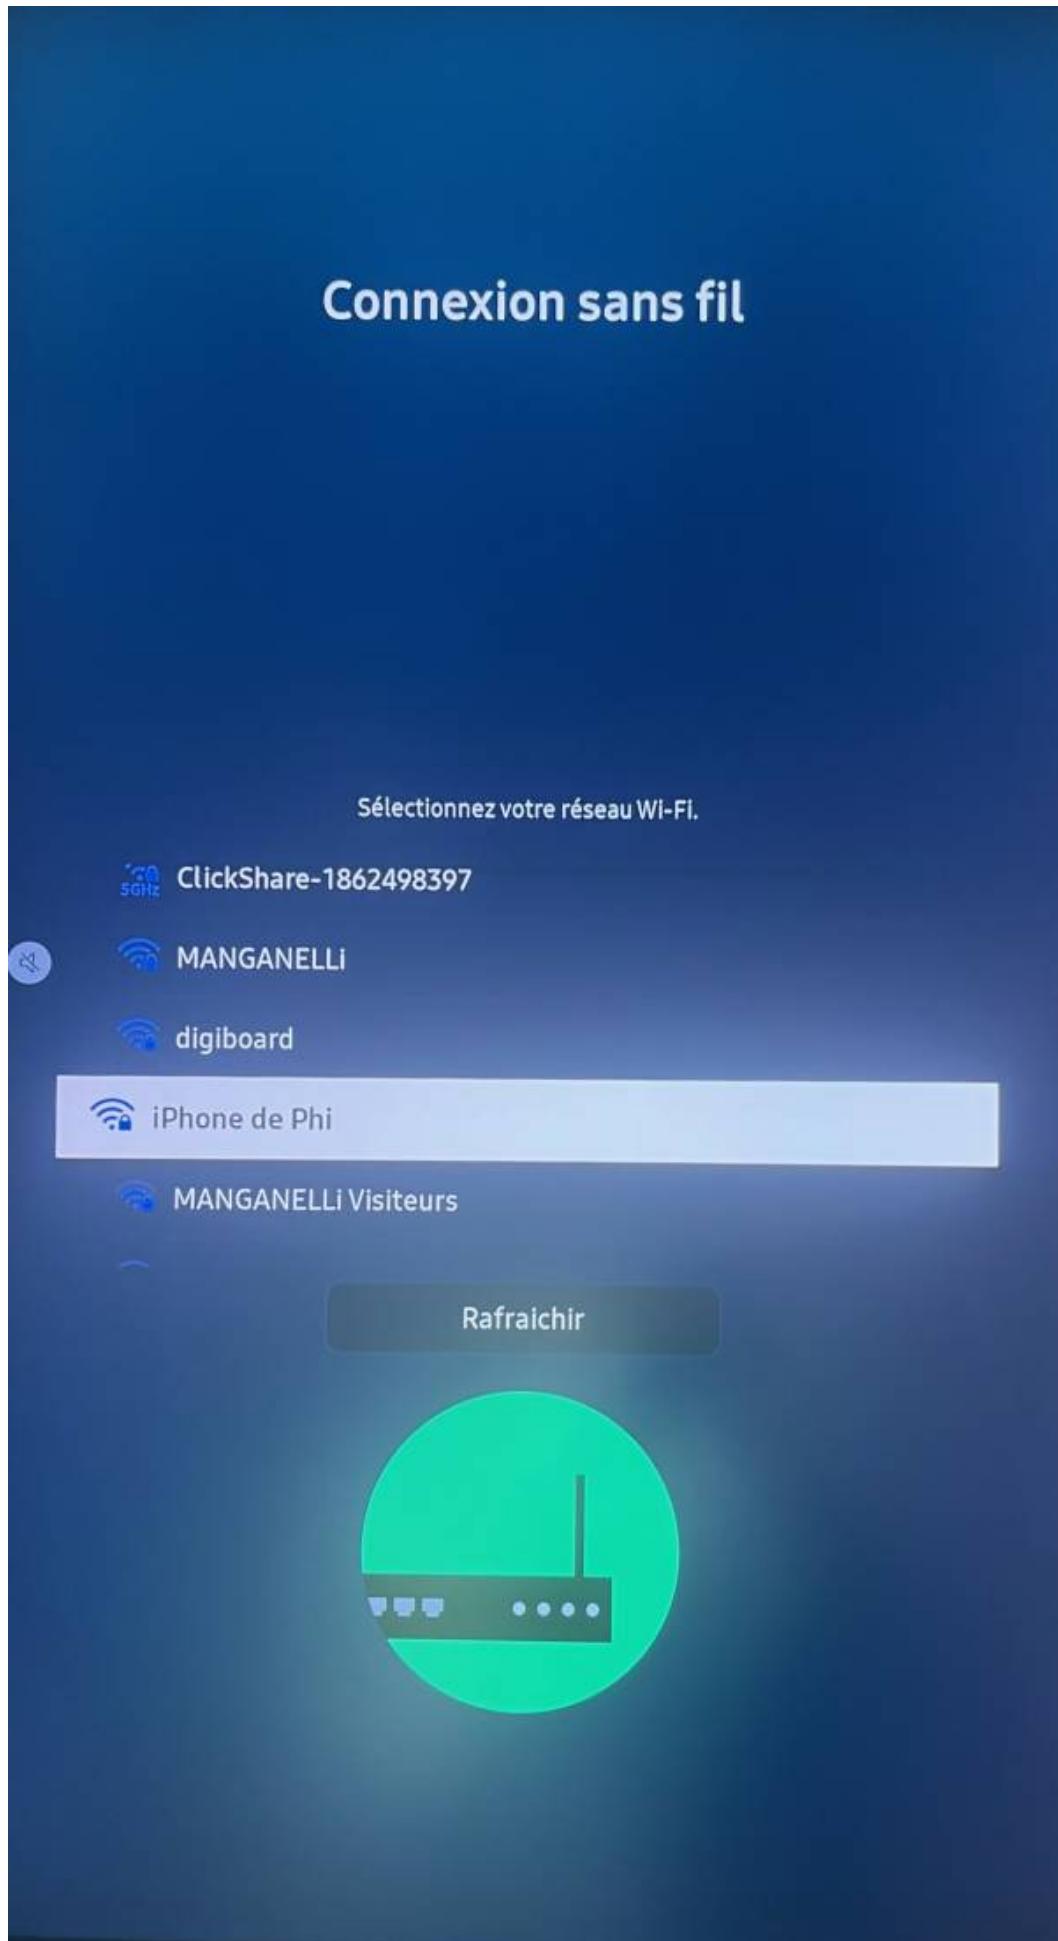

**- If you encounter any connection problems, please contact Manganelli support at
03.20.41.59.69.**

3 - Smart Signage Privacy Notice

- Click on Ok and Right Arrow to go to the next menu

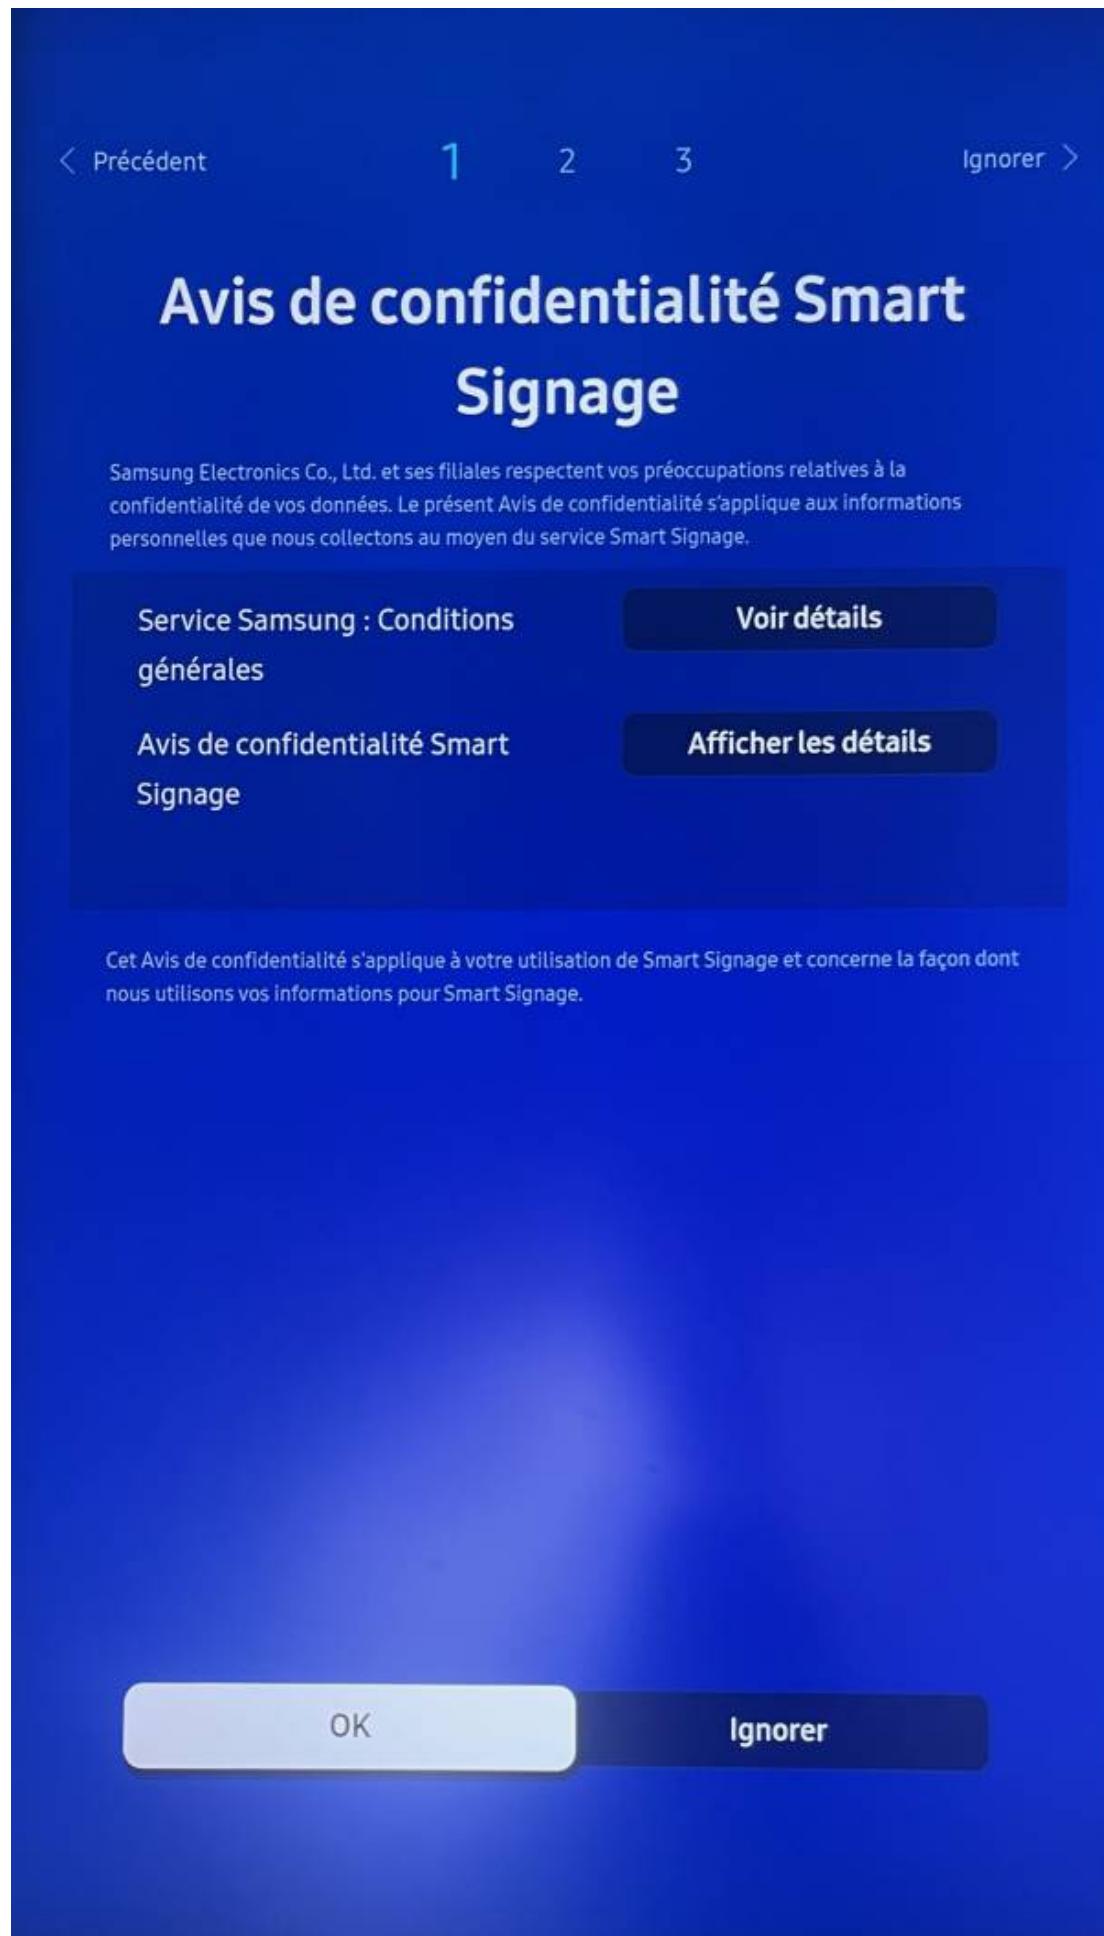

4 - Type of installation

Select “Manual Configuration” with the OK button.

⟨ Précédent

Type d'installation

Sélectionnez le type d'installation pour votre périphérique.

Configuration manuelle

Suivez les instructions détaillées pour la configuration initiale.


Configuration sans intervention

La configuration sera gérée automatiquement par Tizen Business Manager (<https://tbn.tzenenterprise.com/>). Il est plus pratique d'initialiser plusieurs Signage.

Cloner le produit

Clonez les paramètres système entre un lecteur flash USB et votre périphérique. Vérifiez que le lecteur flash USB est connecté avant de tenter de cloner les paramètres système.

5 - Display orientation Depending on the installation of your equipment - Select portrait or landscape,
confirm - Right arrow to go to the next menu

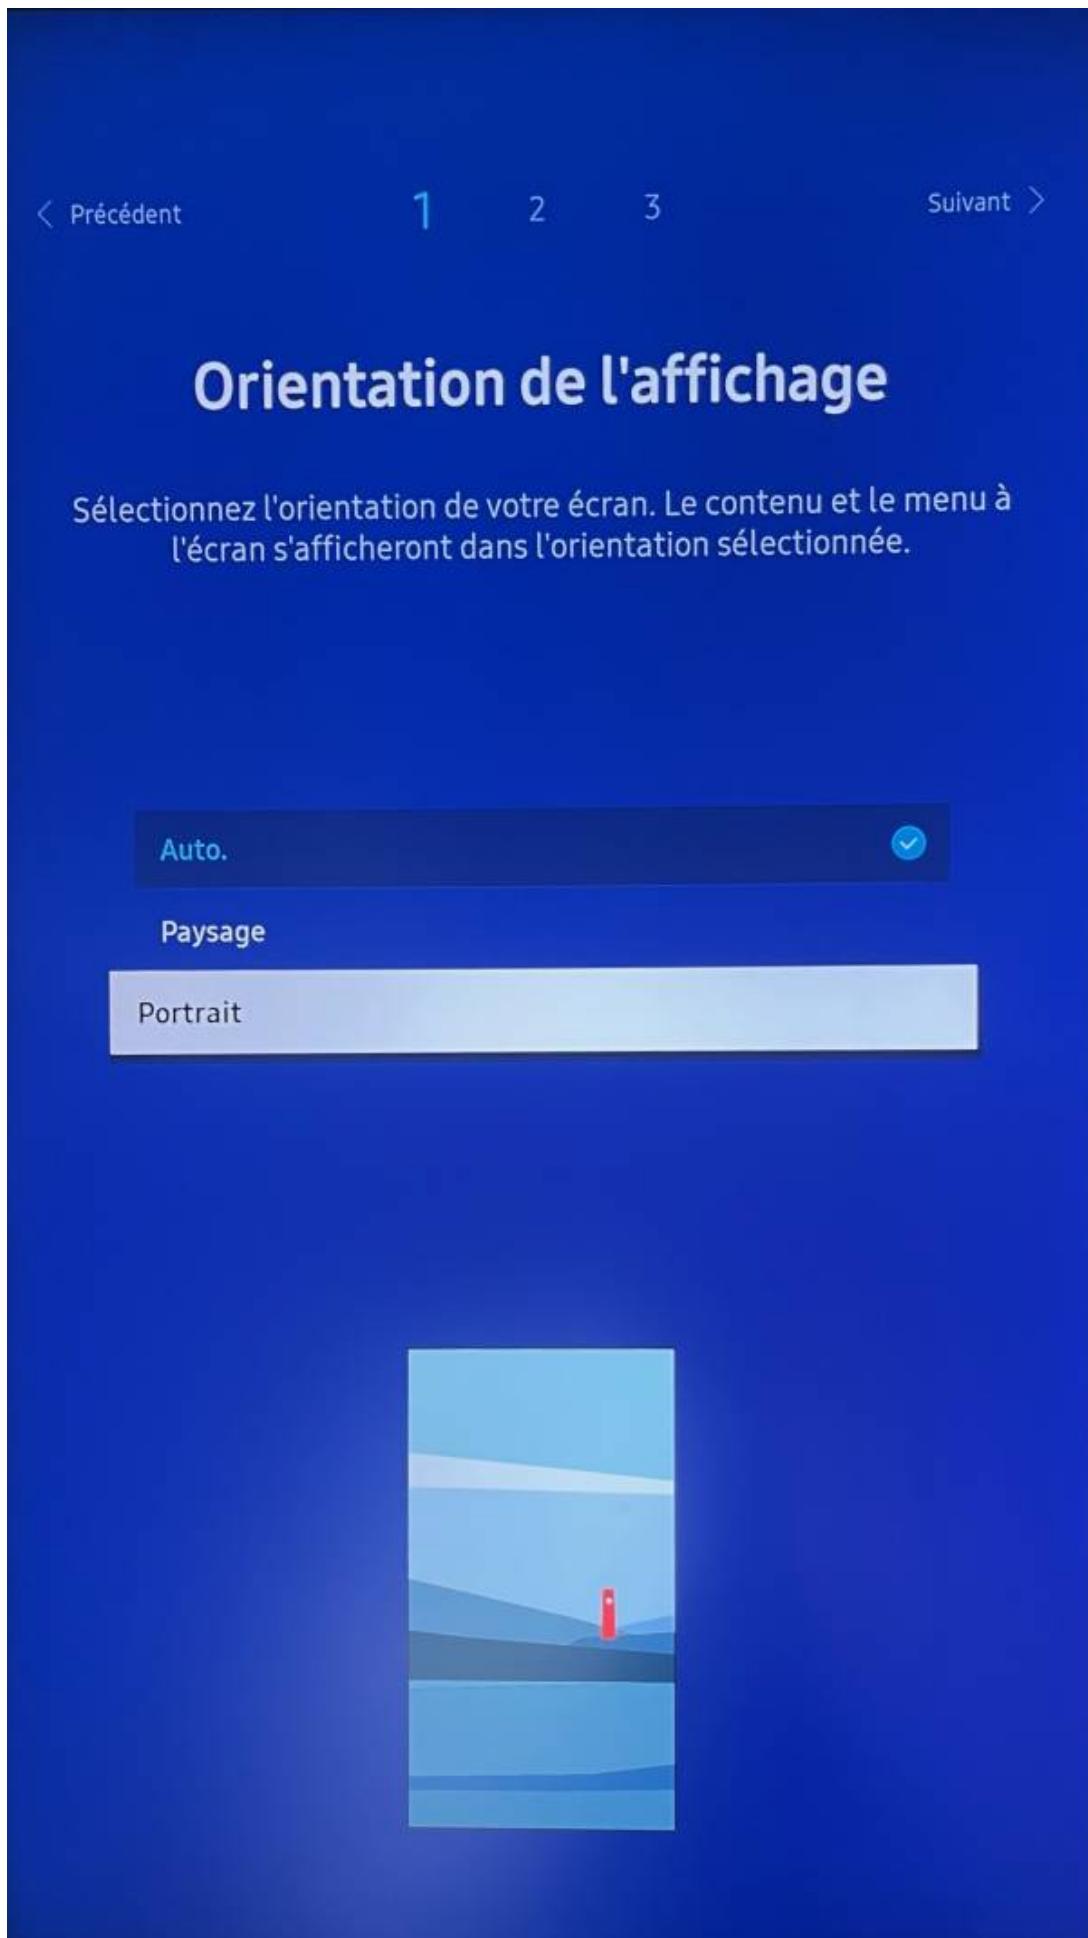

6 - Selecting the player

- Select “Custom application” with the Ok button



Then enter the URL of the zebrix server:

For the USA <http://screen.zebrix.us>

for Europe <http://screen.zebrix.net>

Then click on “Done”.



7 - Configuring the RM server

In the server address, enter: rm.manganelli.com:7001 then click on “Done” and the right arrow to move on to the next menu.



8 - Server peripherals

You don't have to do anything, just right arrow to skip the menu.

< Précédent 1 2 3 Suivant >


Périphérique sur serveur

Indiquez l'ID temporaire ou le code de groupe du périphérique pour trouver celui-ci sur la liste des périphériques sur le serveur.

Ignorez cette étape pour configurer le groupe de périphériques ultérieurement sur le serveur ou si le périphérique est déjà approuvé par le serveur.

ID temporaire	QM55C_9426
Code de groupe	Entrez le numéro

Suivant



The screen shows a step-by-step configuration process for a device connected to a server. Step 1 involves entering a temporary ID or group code to find the device on the server list. An optional note suggests skipping this step if the device is already approved by the server. The current input fields show a temporary ID (QM55C_9426) and a placeholder for a group code. A large 'Suivant' button is at the bottom. A central illustration depicts a server icon in a cloud above a laptop icon, with a double-headed arrow indicating communication or pairing between them.


9 - Switching off

Select “Off” then right arrow to go to the next menu




10 - Setting the date and time

Use the arrows to update the screen and set the time, Caution: if the screen is not set correctly for the time and day, this could lead to problems with broadcasting on the screens. Right arrow to go to the next menu

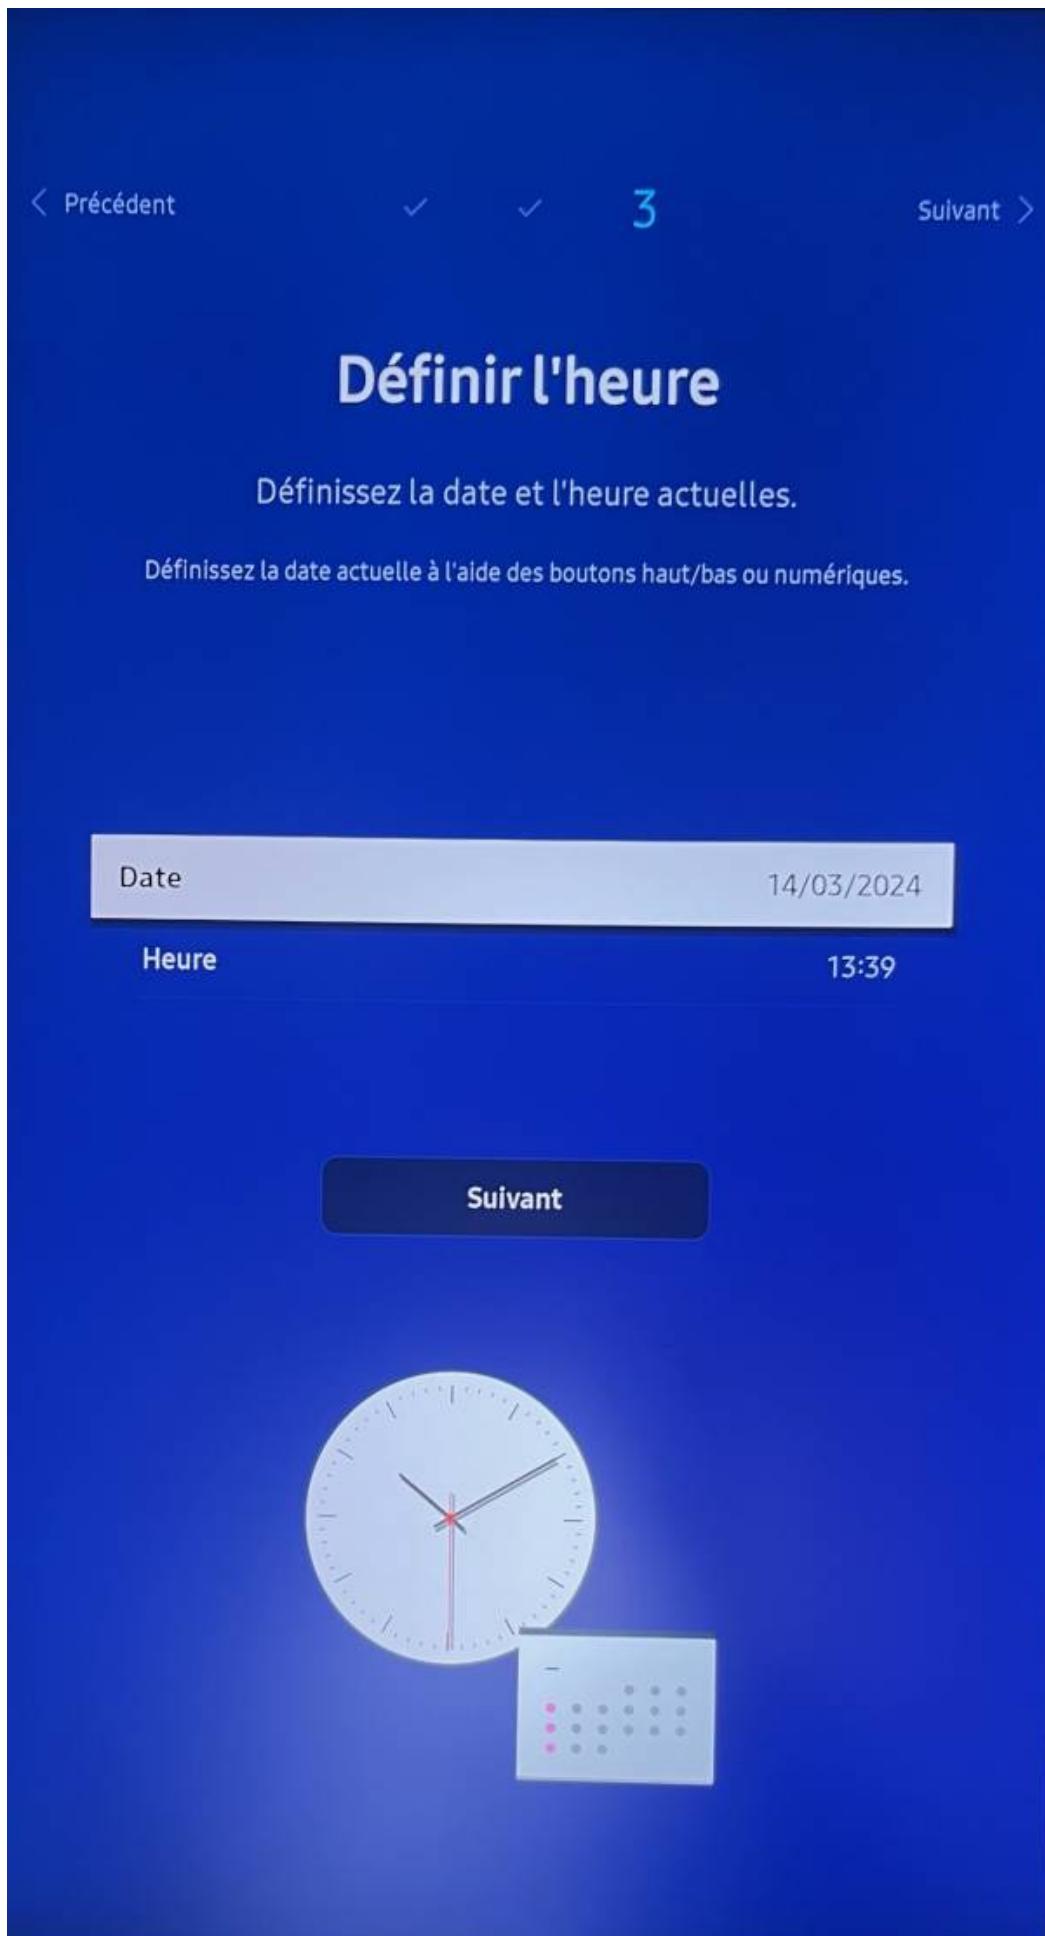

11 - Pim code_


You don't have to do anything, just right arrow to skip the menu.

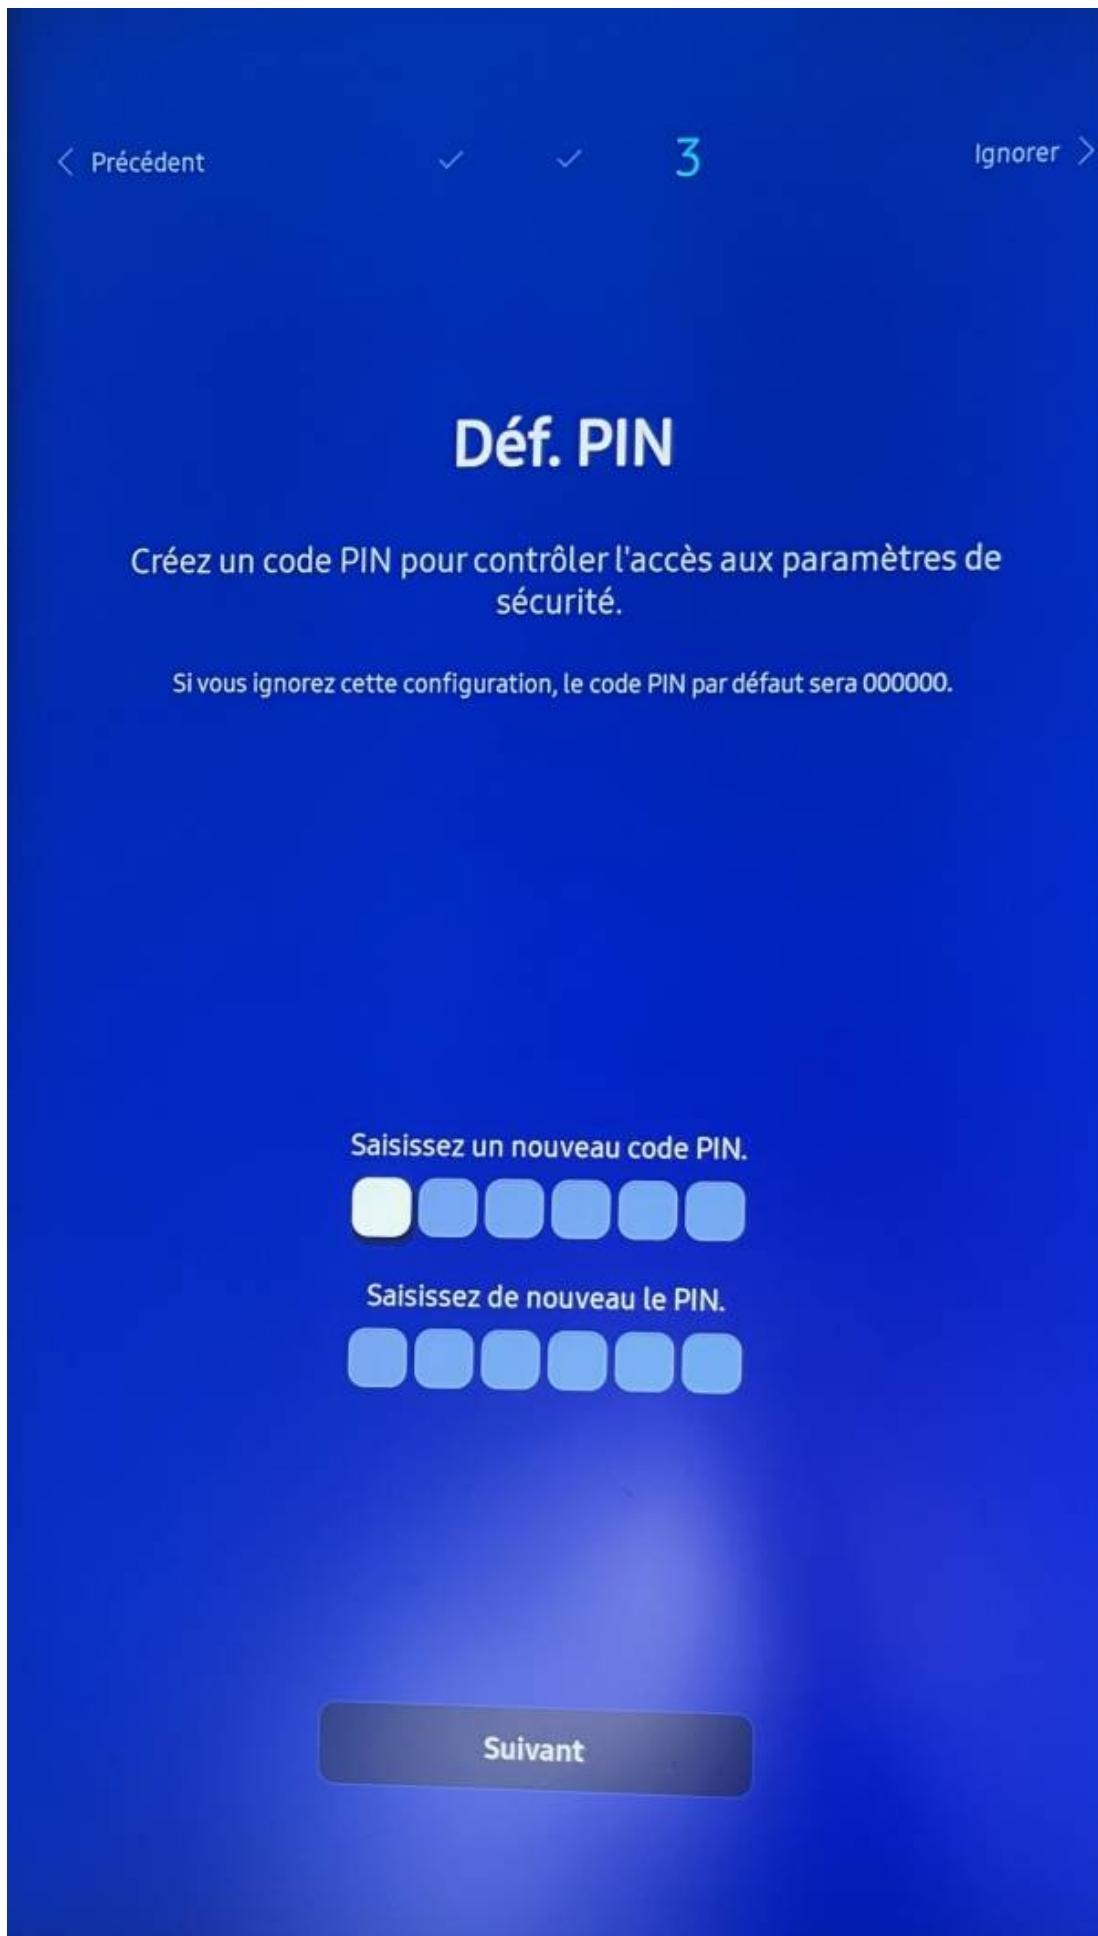


Congratulations, the screen configuration is complete!




Now all you have to do is launch the application by pressing "Home". Go to the "Functions" tab and select "Custom APP"

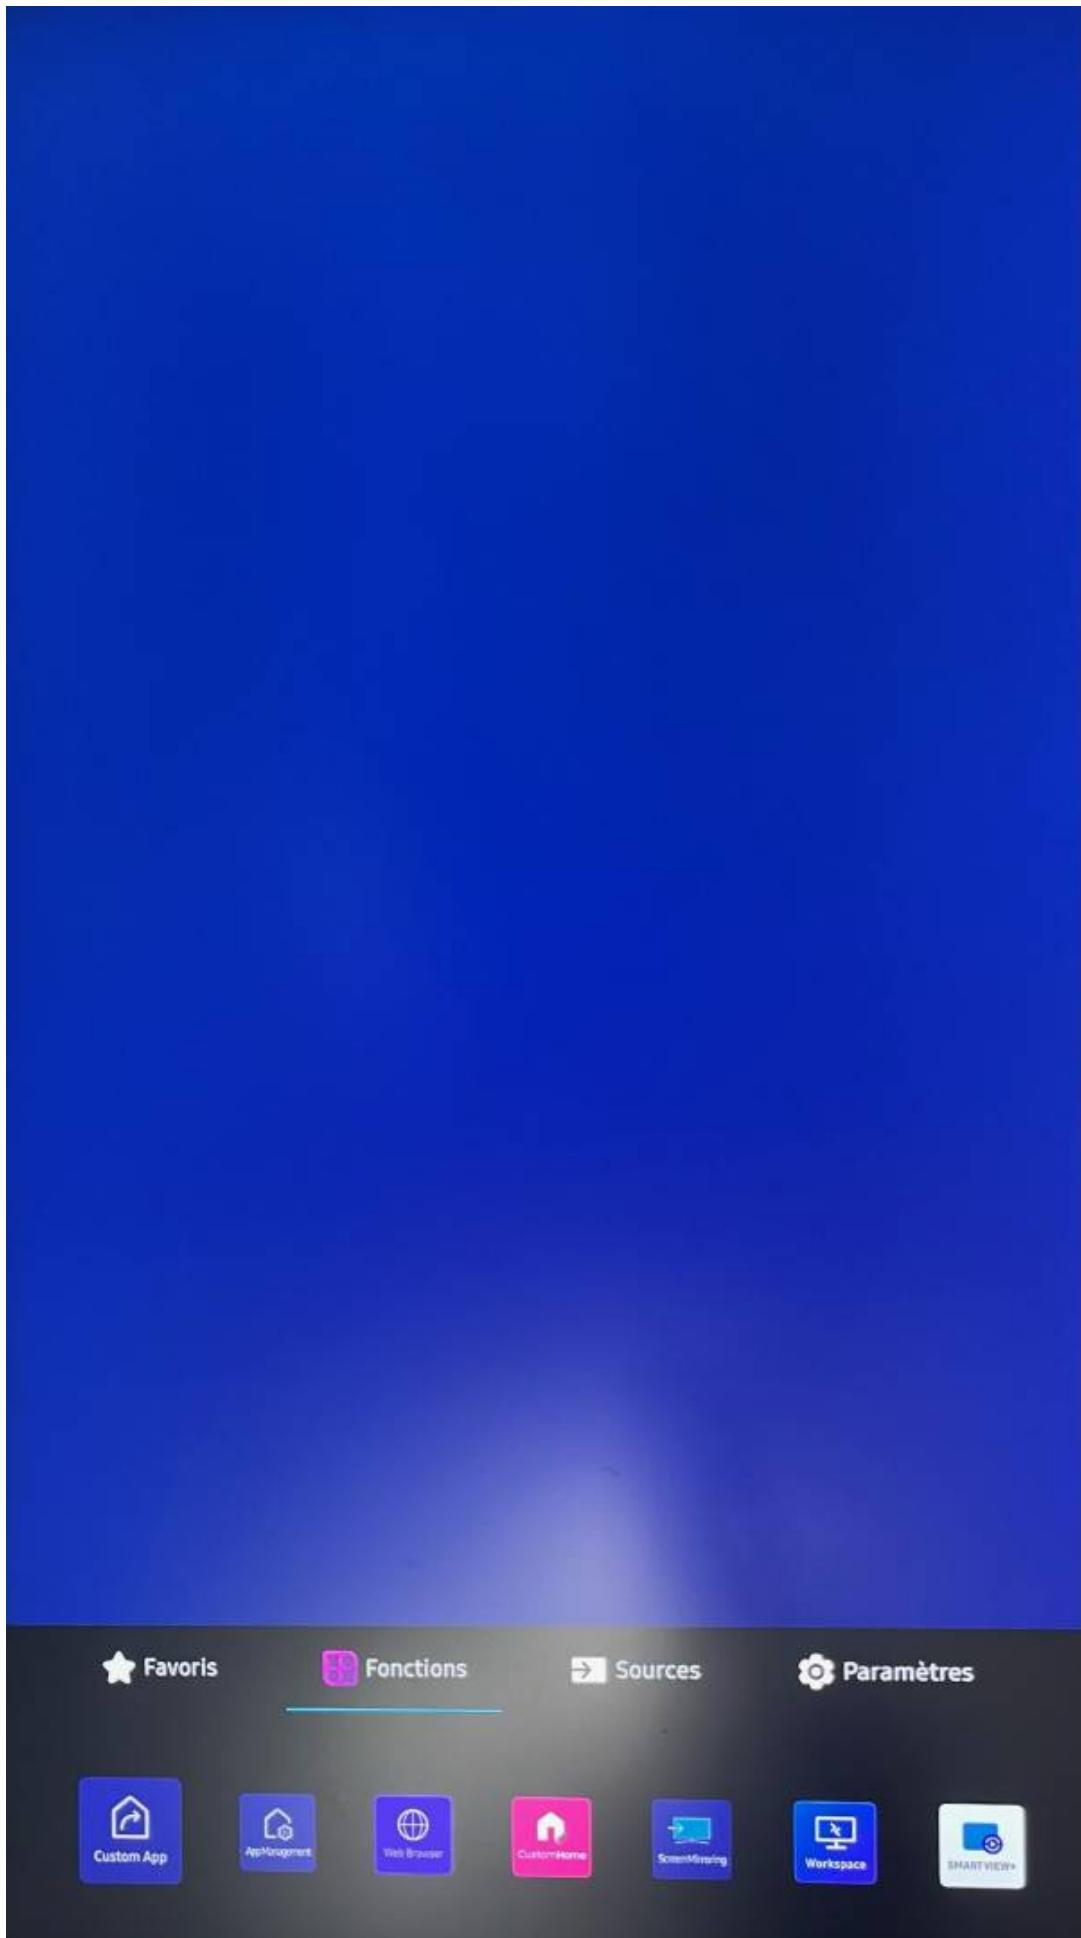

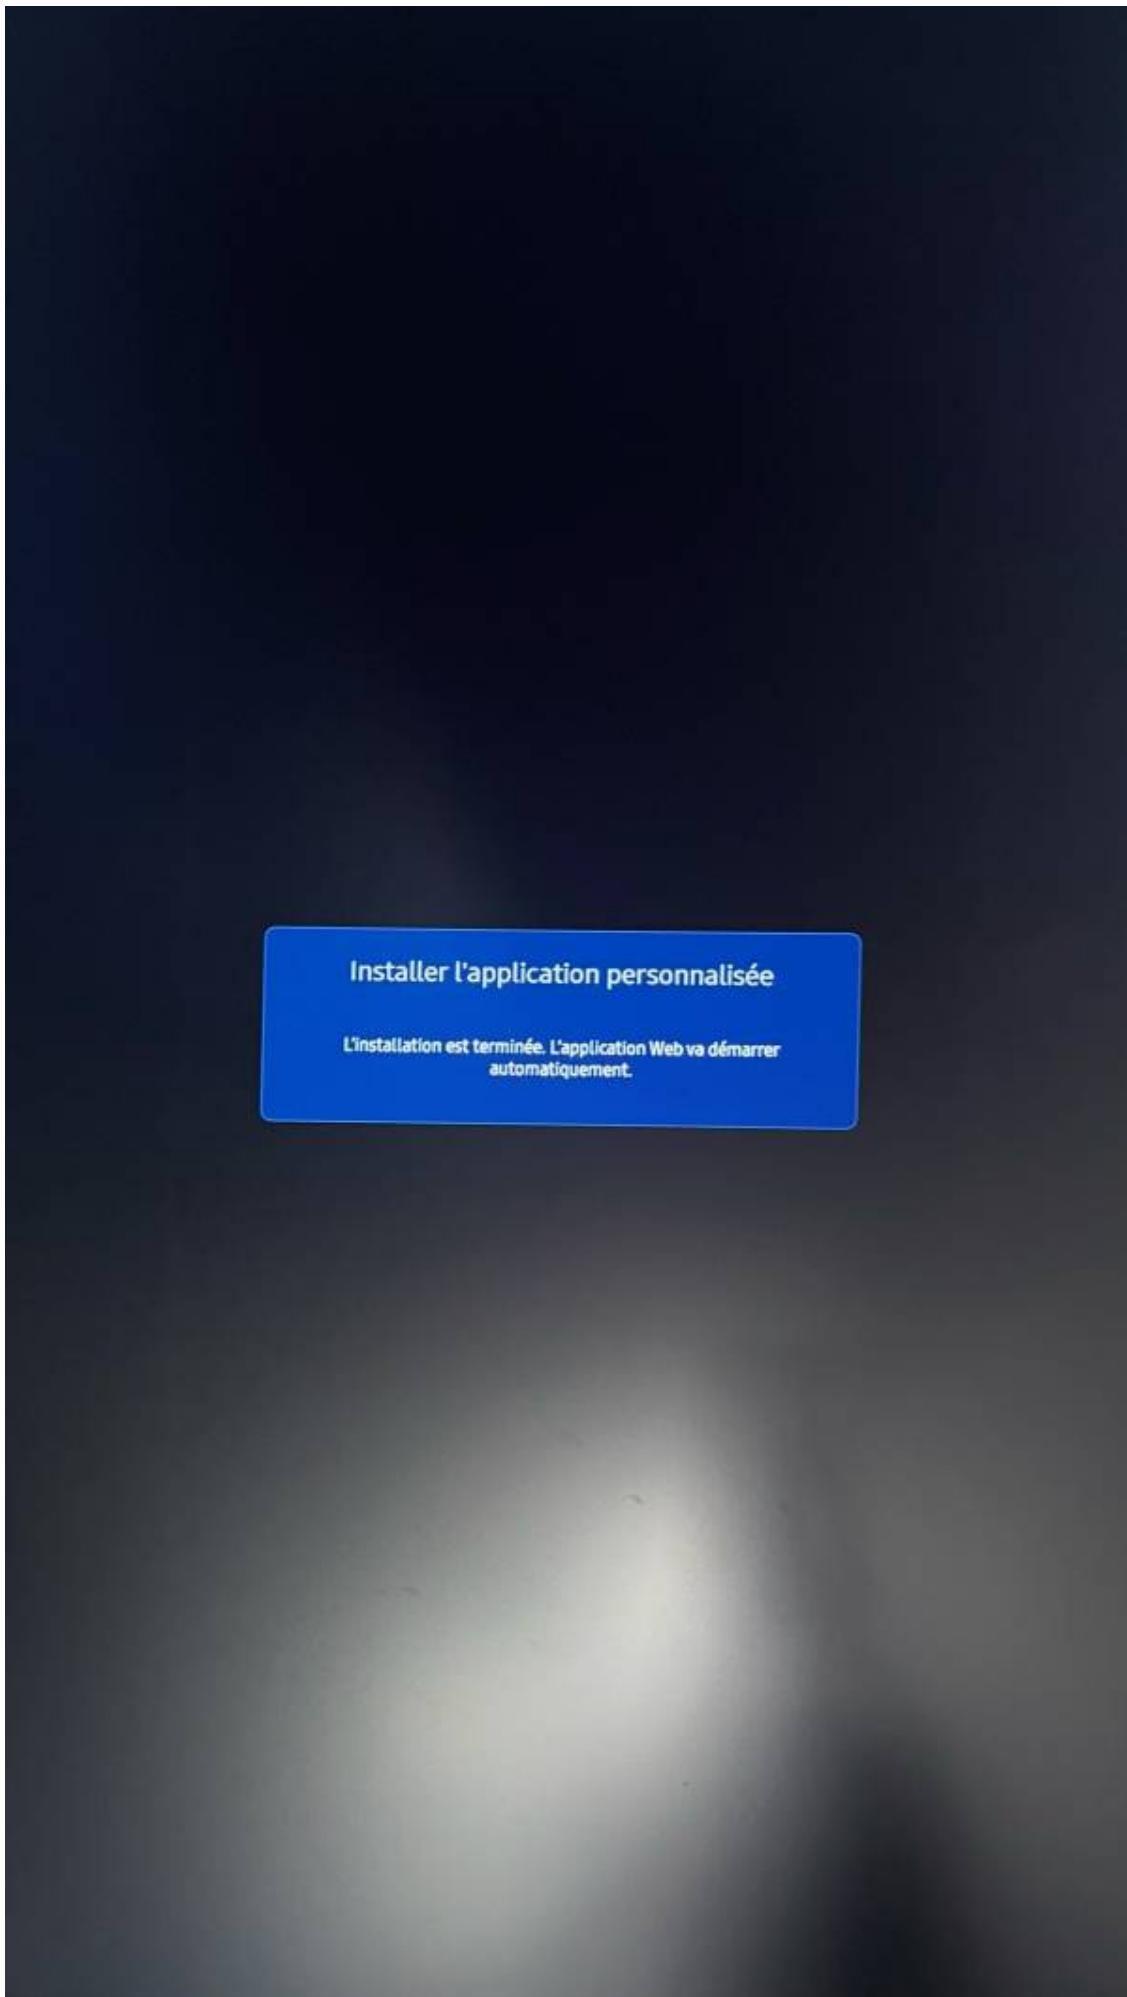

Once the application is complete, the content will be broadcast.

(If this is a configuration during an installation, the screen may need to be activated. Please contact support in this case.)

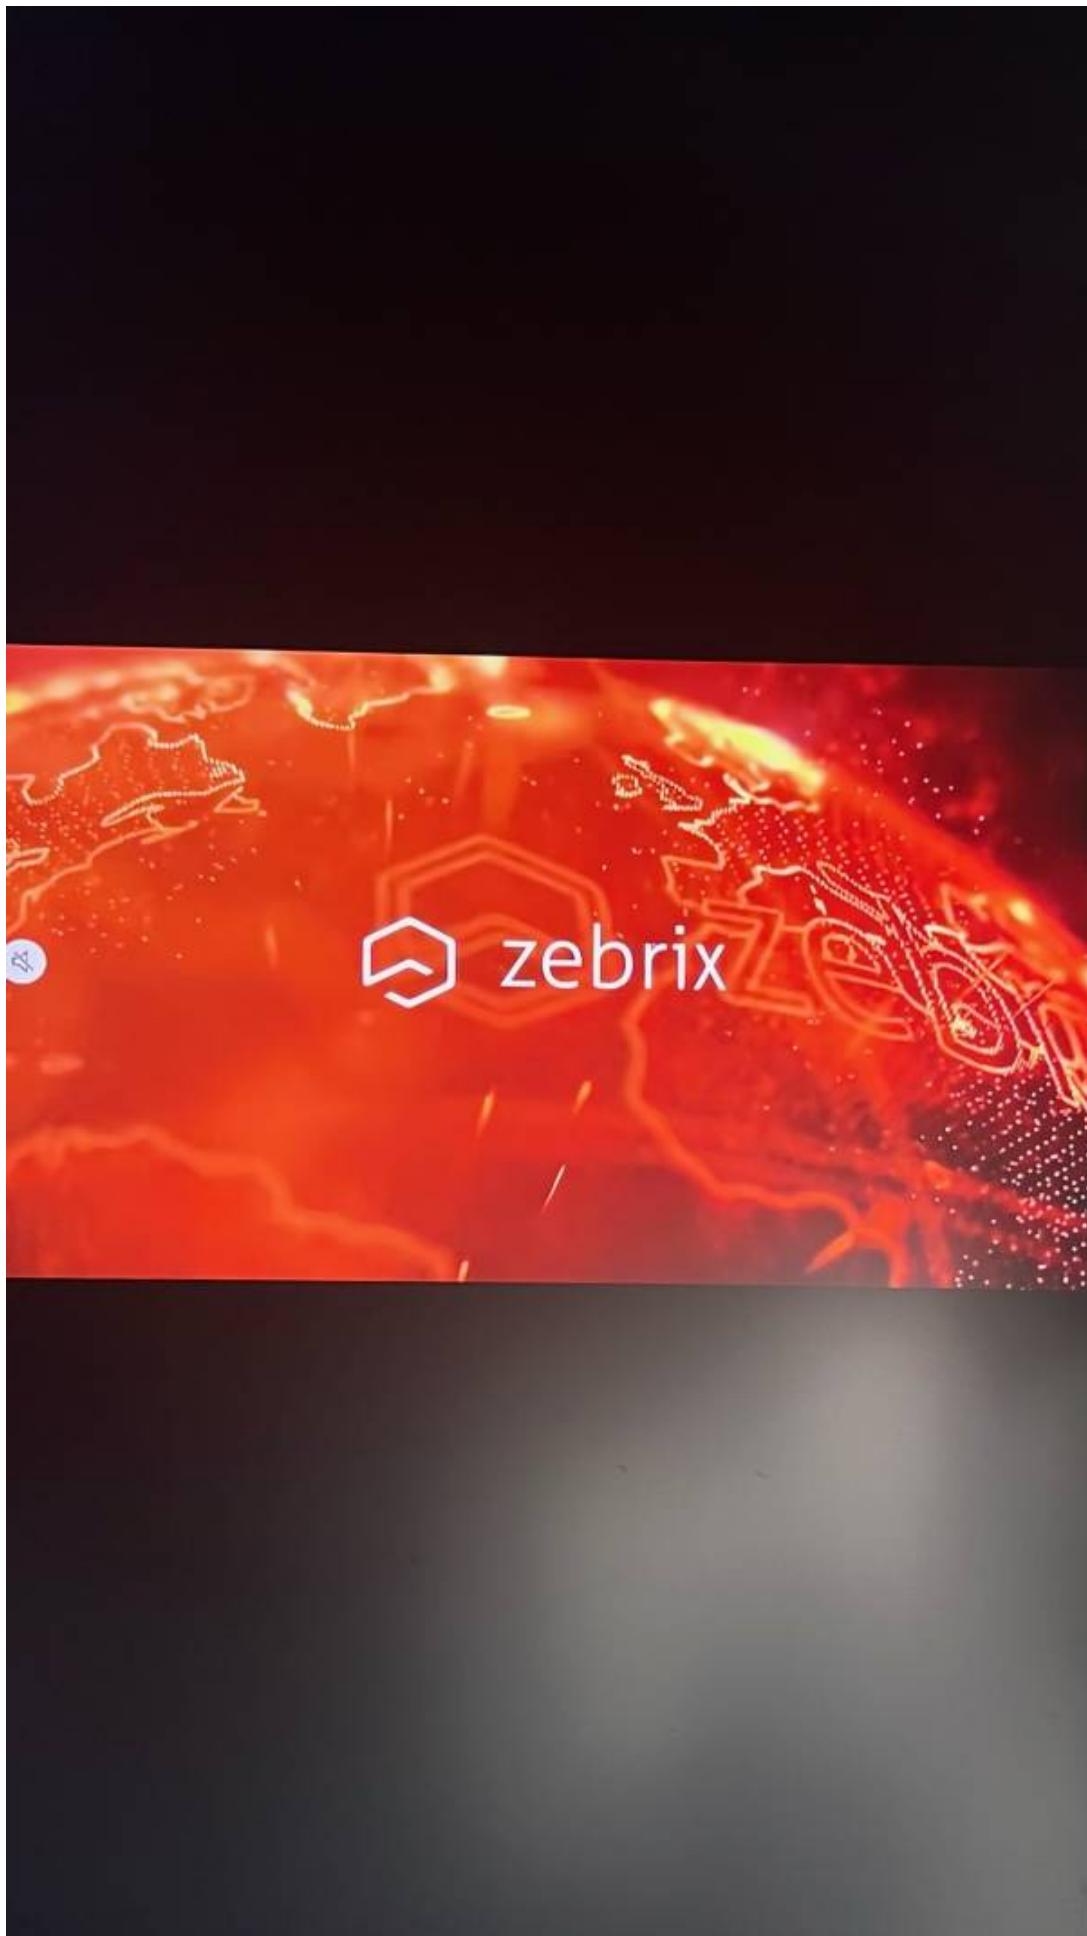

From:
<https://documentation.zebrix.net/> - **zebrix documentation**

Permanent link:
https://documentation.zebrix.net/doku.php?id=en:configuration_initiale_ecrans_tizen7&rev=1710428577

Last update: **2024/03/14 16:02**

