


Initial Setup – Tizen 7 Screen

Follow the steps below using the Samsung remote control.

1 - Language Selection


Use the arrow keys to scroll and select “French” with the OK button (between the arrows).

Press the right arrow to proceed to the next menu.

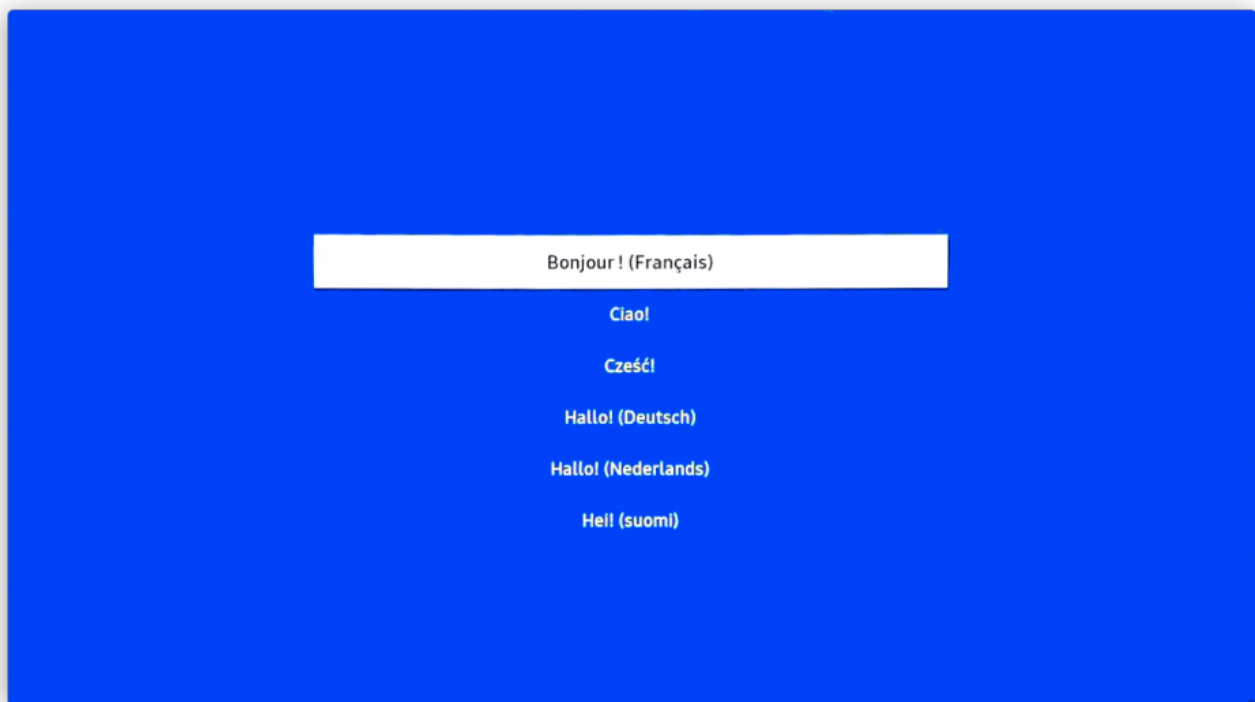


2 - Connect to a Network



You can connect the device via a wireless network (Wi-Fi) or a wired connection (RJ45) depending on your setup. Select the option with the OK button.

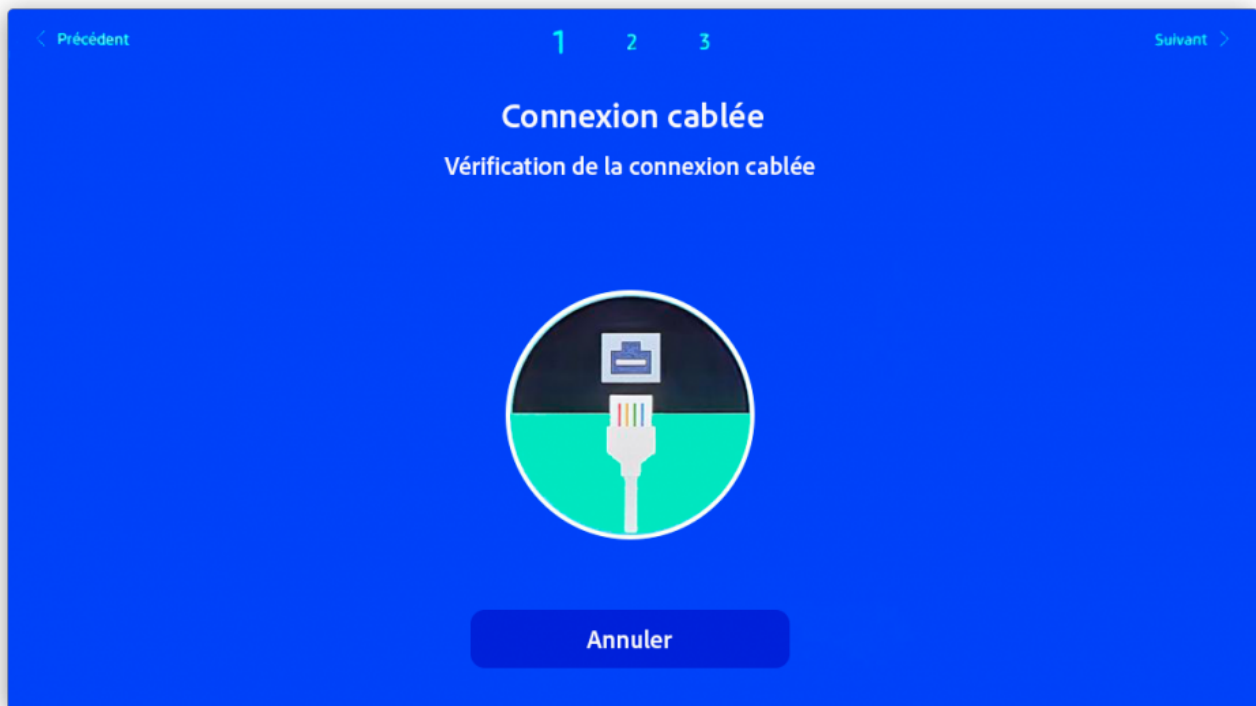


Wired: The screen will check the network status. If everything is OK, press the right arrow to continue.

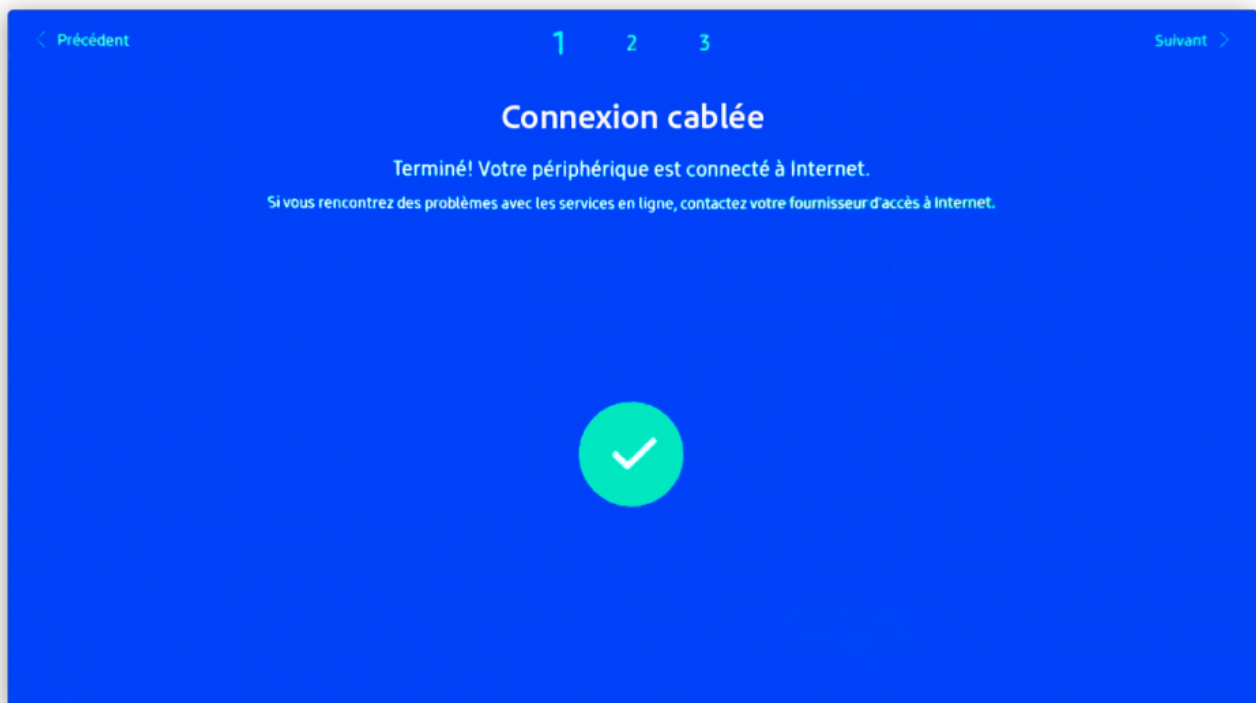

Wi-Fi: Select your network and enter the password, then press Finish. (A secure Wi-Fi connection is required.) The screen will verify the connection; if everything is OK, press the right arrow to continue.

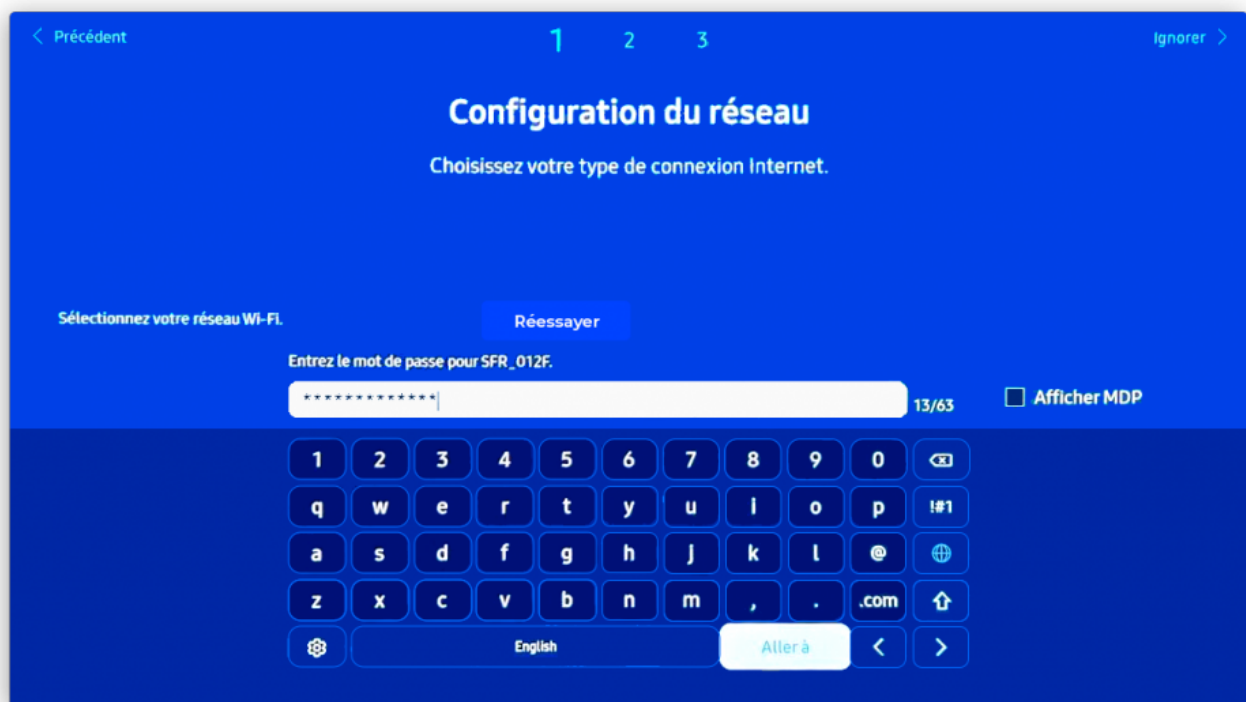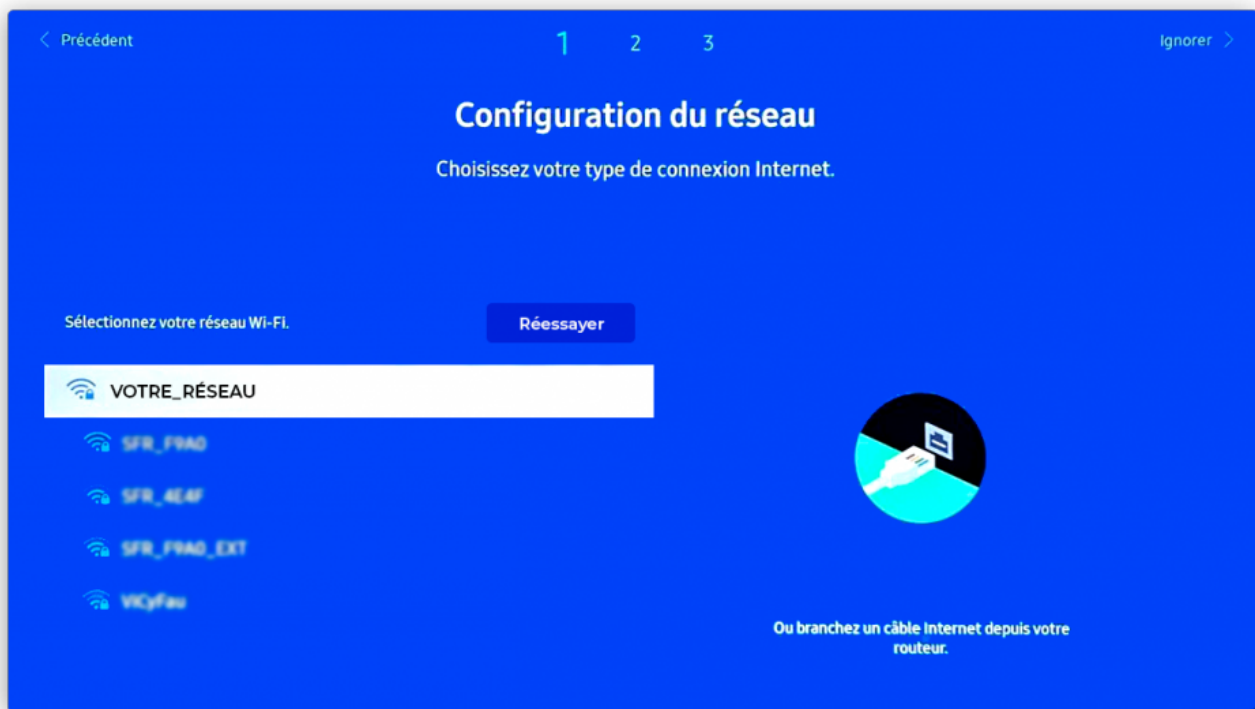

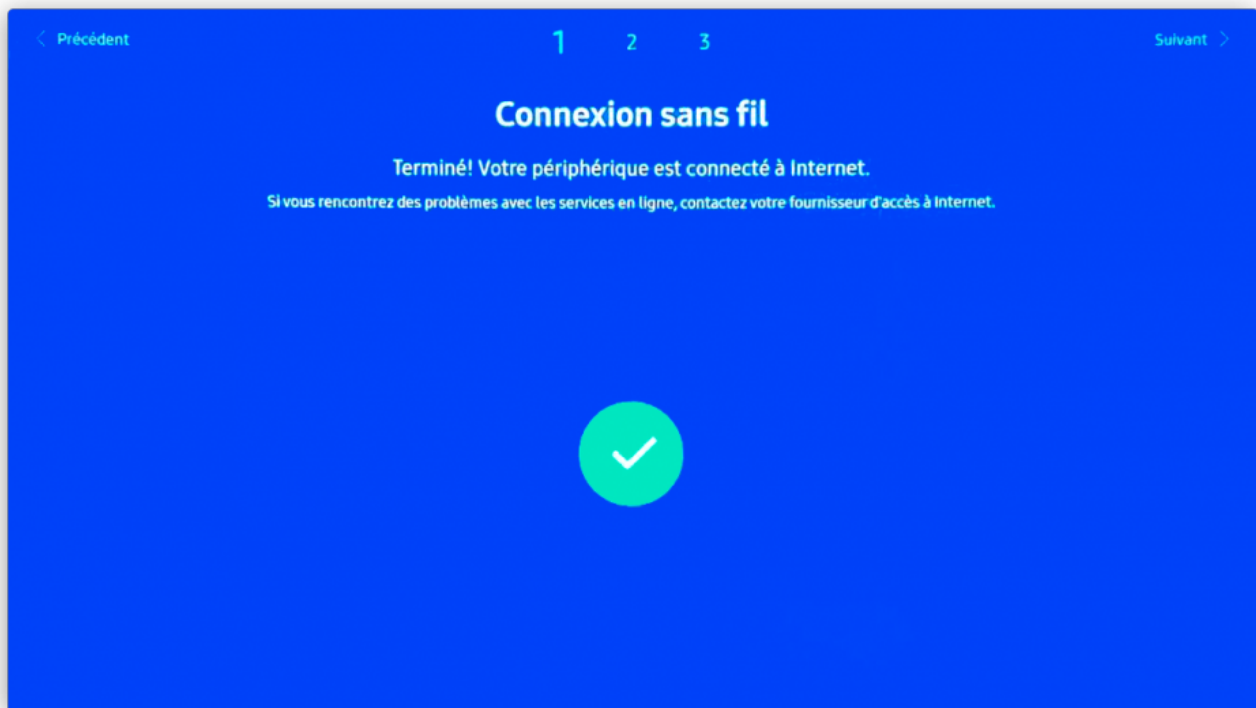

- For connection issues, contact Manganelli support at 03.20.41.59.69


3 - Smart Signage Privacy Notice

Press OK, then the right arrow to continue.



4 - Installation Type

Select “Manual Setup” with the OK button.

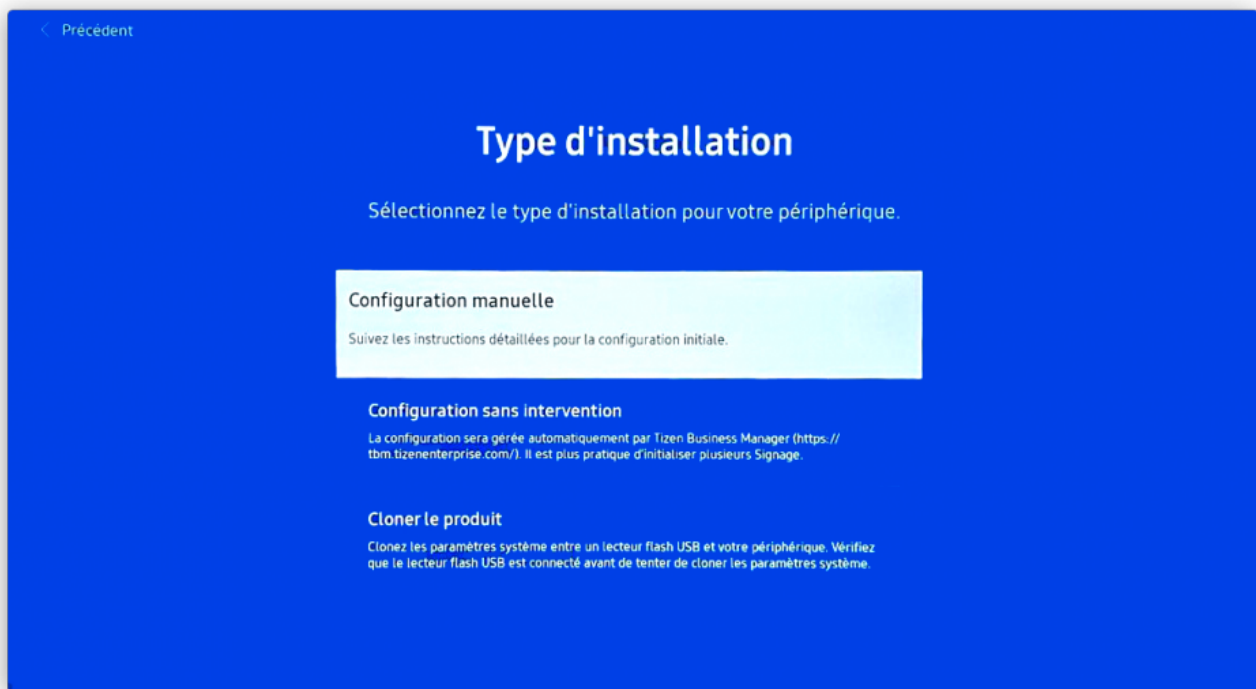

5 - Display Orientation


Choose portrait or landscape according to your setup and confirm.

Press the right arrow to proceed.



6 - Player Selection

Select “Custom Application” with the OK button.

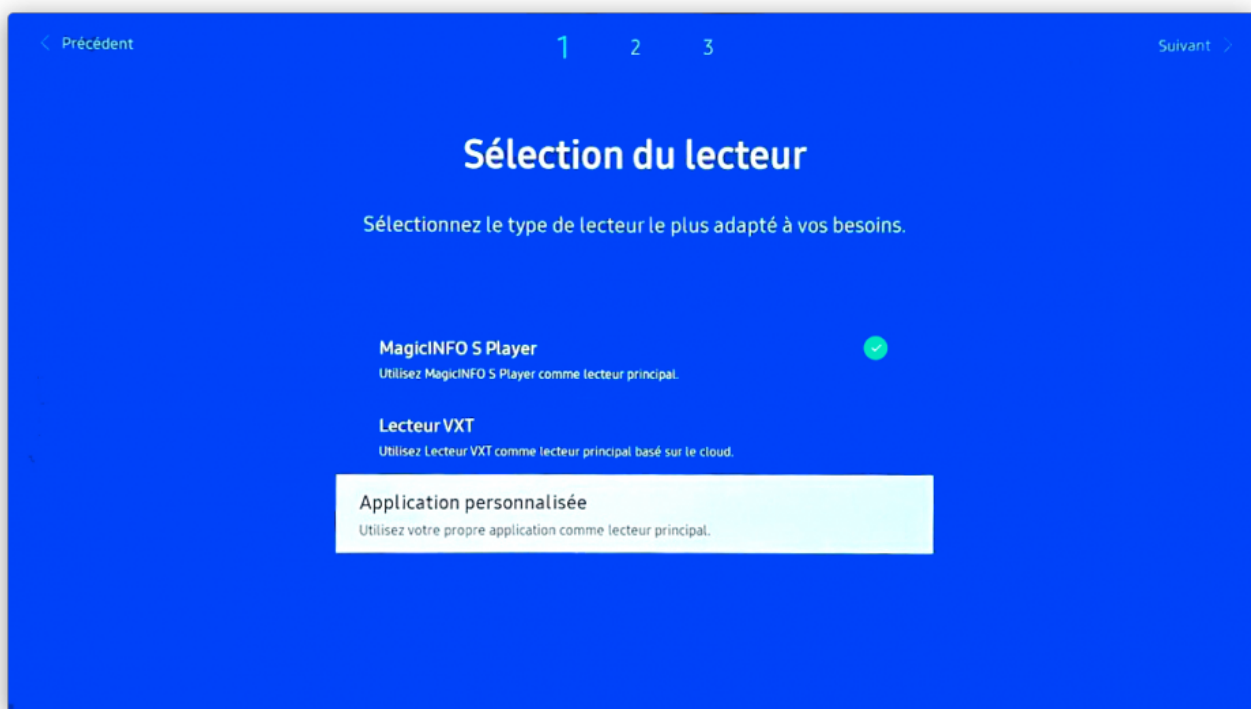


Enter the Zebrix server URL:

USA: <http://screen.zebrix.us>

Europe: <http://screen.zebrix.net>

Click “Finish.”

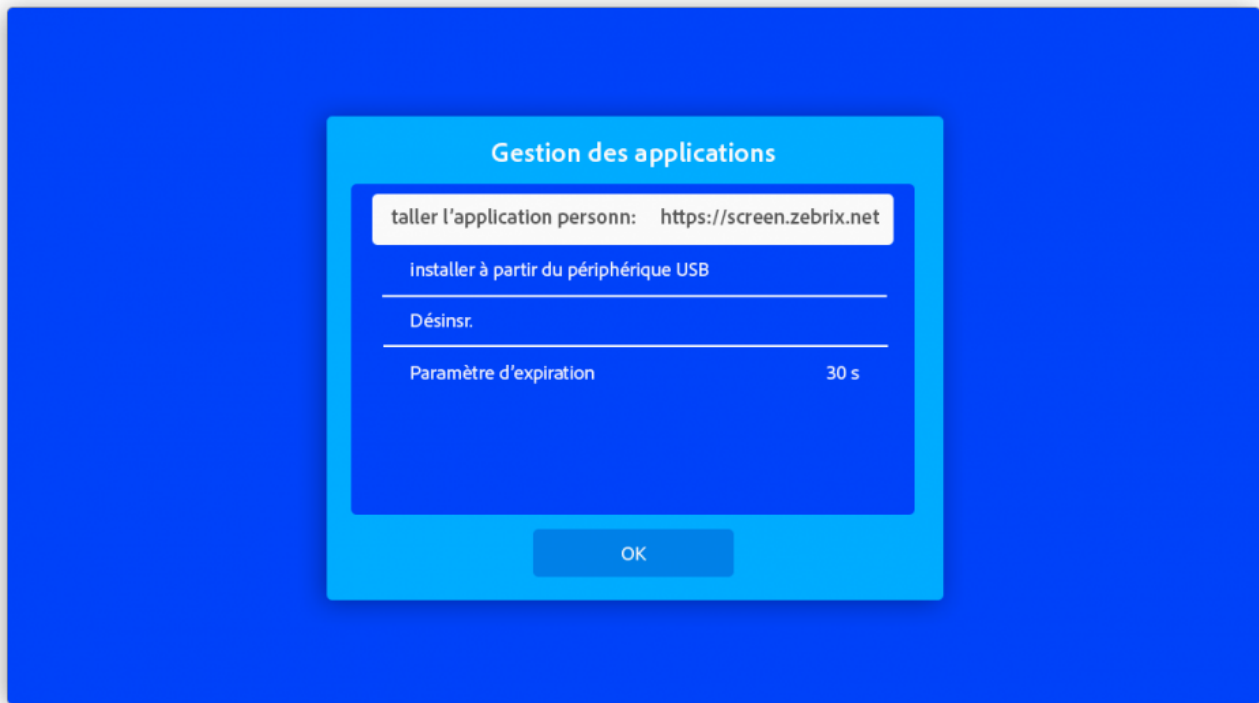

7 - Configure the RM Server

Enter the server address: rm.manganelli.com:7001

Press “Finish” and then the right arrow to continue.

[< Précédent](#)123[Suivant >](#)

Connexion au serveur RM

Indiquez les informations du serveur pour gérer votre périphérique.

Sélectionnez Ignorer pour configurer ultérieurement.

Adresse serveur	127.0.0.1
TLS	Ne pas utiliser
Port	7001

[Suivant](#)[Ignorer](#)

8 - Server Device

No action needed, just press the right arrow.

[< Précédent](#)123[Suivant >](#)

Périphérique sur serveur

Indiquez l'ID temporaire ou le code de groupe du périphérique pour trouver celui-ci sur la liste des périphériques sur le serveur.

Ignorez cette étape pour configurer le groupe de périphériques ultérieurement sur le serveur ou si le périphérique est déjà approuvé par le serveur.

ID temporaire

QB43C_3831

Code de groupe


Entrez le numéro

[Suivant](#)



9 - Power Off Settings

Select “Off” and press the right arrow to continue.

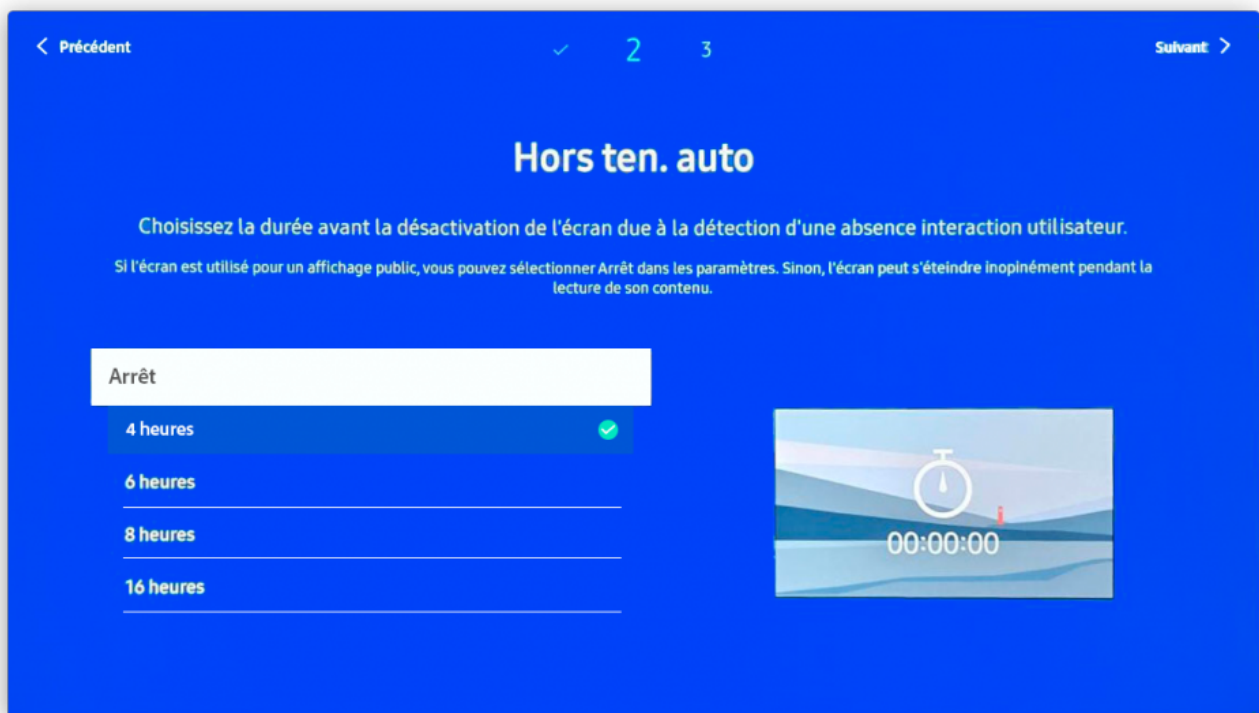

10 - Date and Time Settings

Use the arrows to set the correct date and time. ⚠ Incorrect settings may cause display issues.

Press the right arrow to continue.

← Précédent

✓ ✓ 3

Suivant →

Définir l'heure

Définissez la date et l'heure actuelles.

Définissez l'heure actuelle à l'aide des boutons haut/bas ou numériques.

Date

18/09/2025

Heure

17:12

Suivant



11 - Pin Code

No action needed, just press the right arrow.

← Précédent

✓ ✓ 3

Suivant →

Déf. PIN

Créez un code PIN pour contrôler l'accès aux paramètres de sécurité.

Si vous ignorez cette configuration, le code PIN par défaut sera 000000.

Saisissez un nouveau code PIN.

Saisissez de nouveau le PIN.


Suivant

12 - Auto Source Change

<https://documentation.zebrix.net/>


Printed on 2026/08/16 04:26

Press MENU, navigate to System > Auto Source Change.

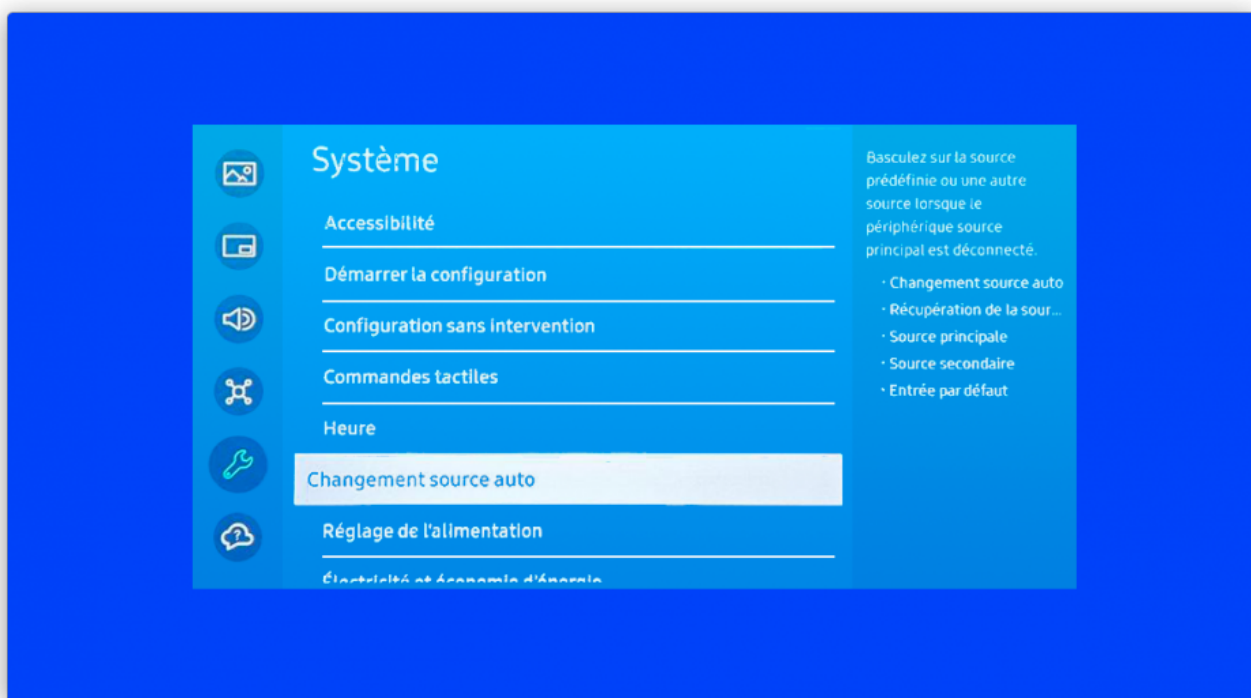


Select Auto Source Change > New Input.

Use the arrows to select Default Input > Custom Application.

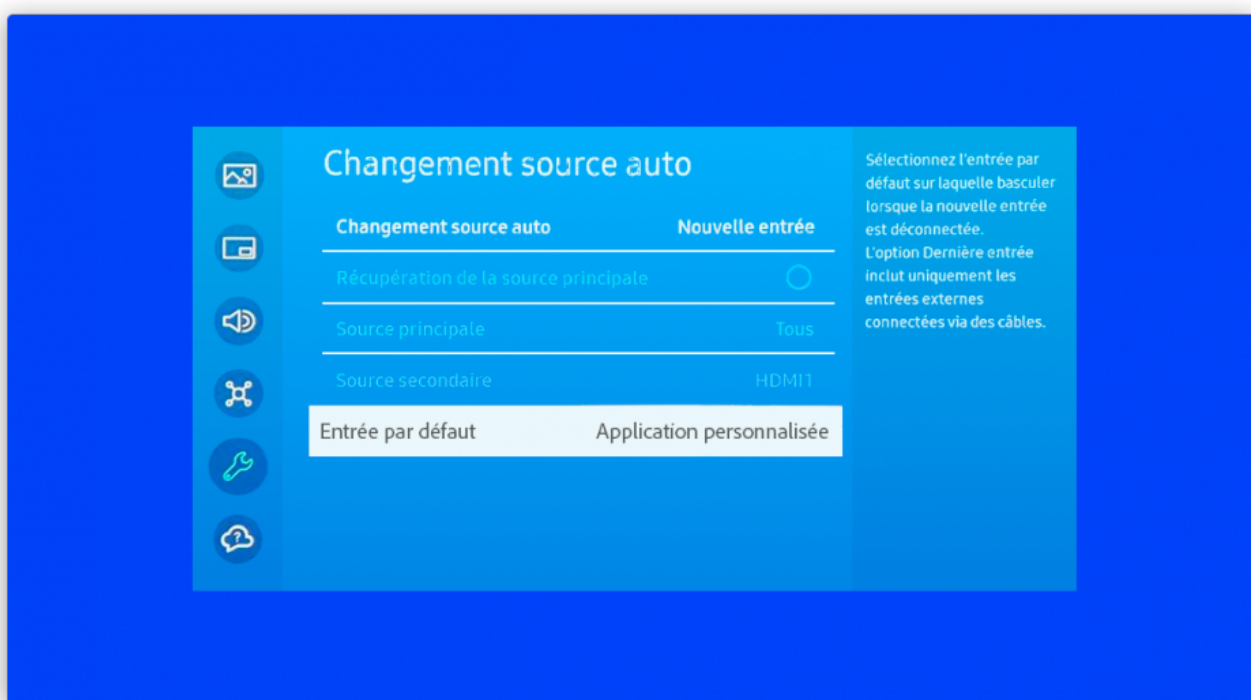


13 - Set Up Wake-Up Timer

Press HOME, then navigate to Settings > Prog. On/Off using the right arrow.


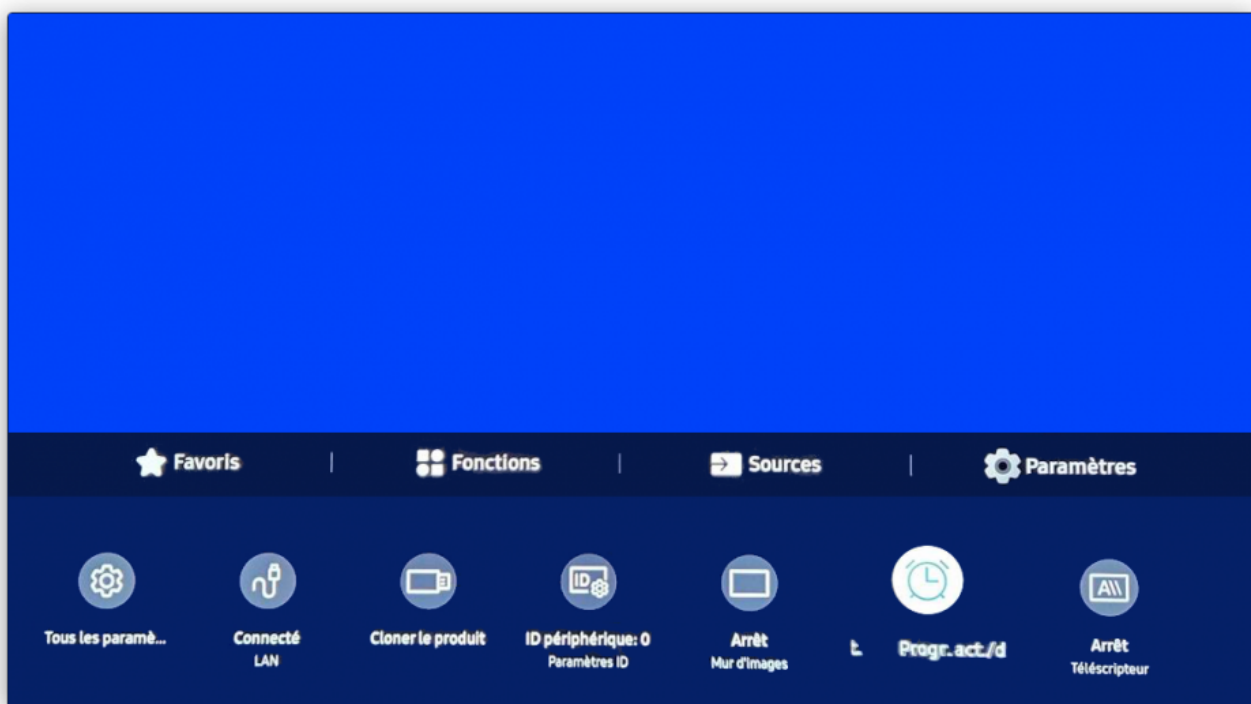


Select Prog. On.

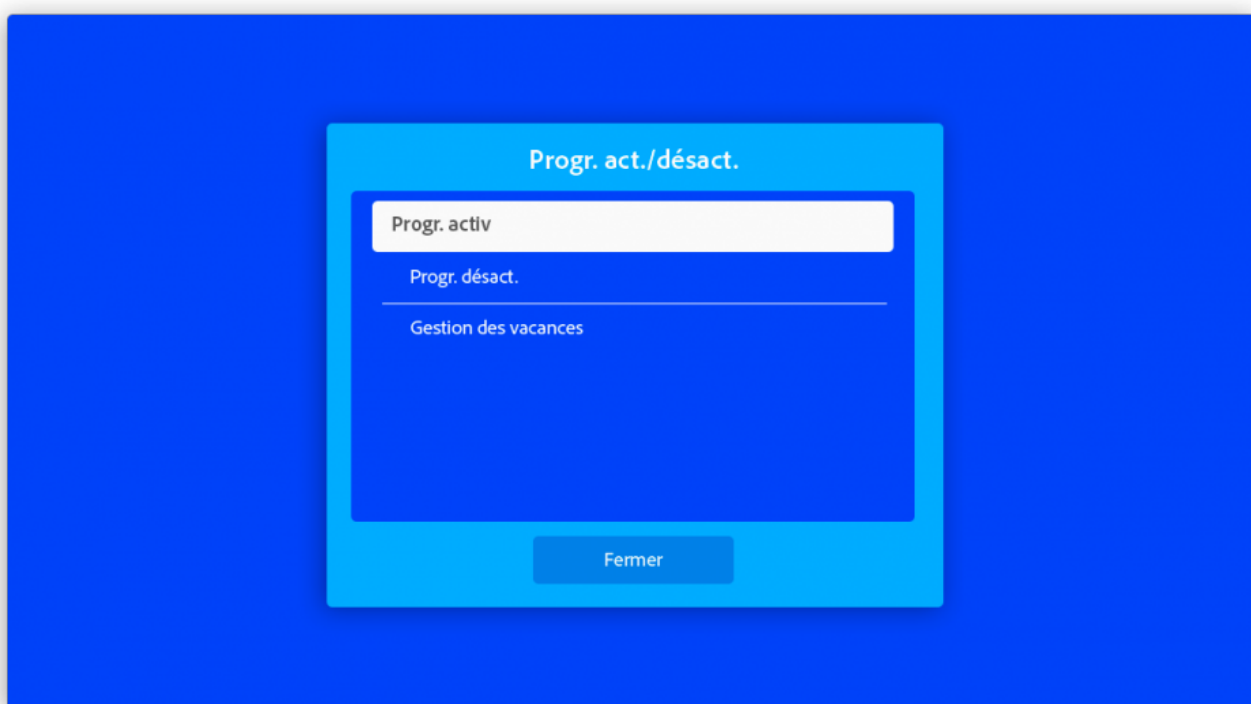


For Prog. On 1 and Prog. On 2, change from “Do not use” to select the days and set wake-up times

according to the business hours.

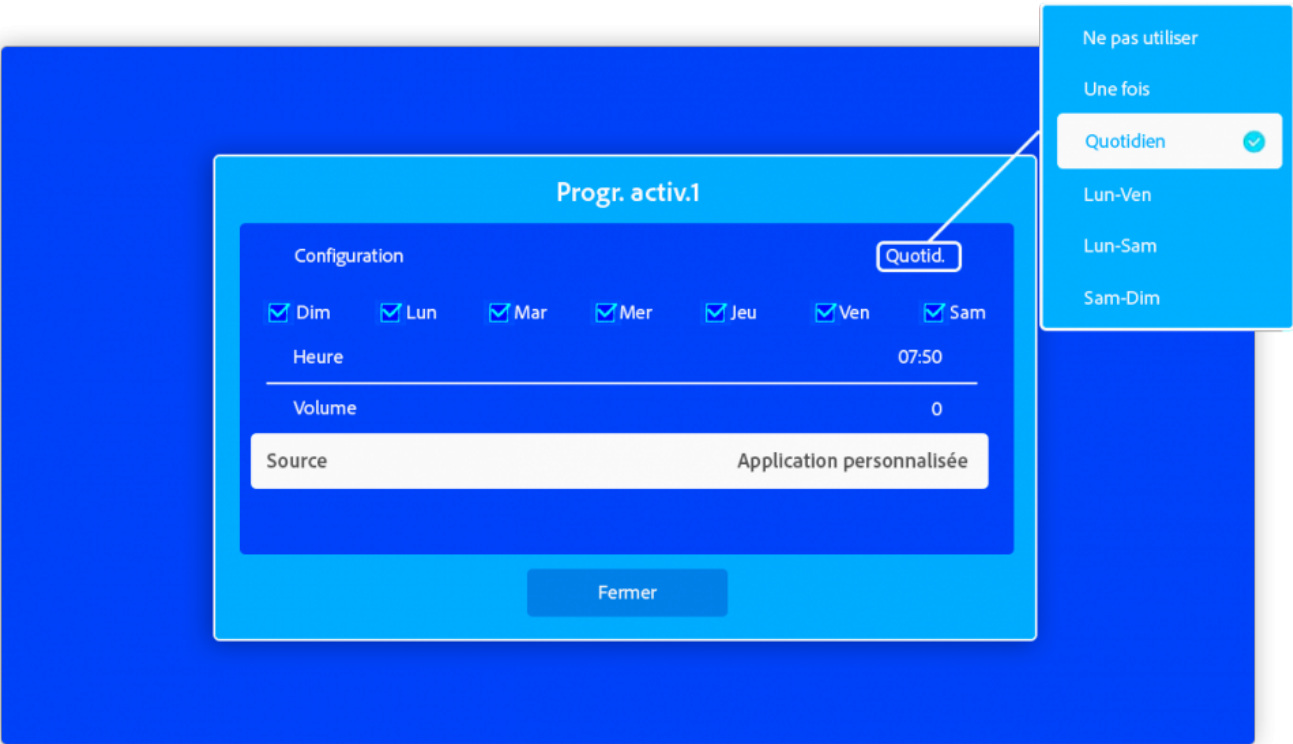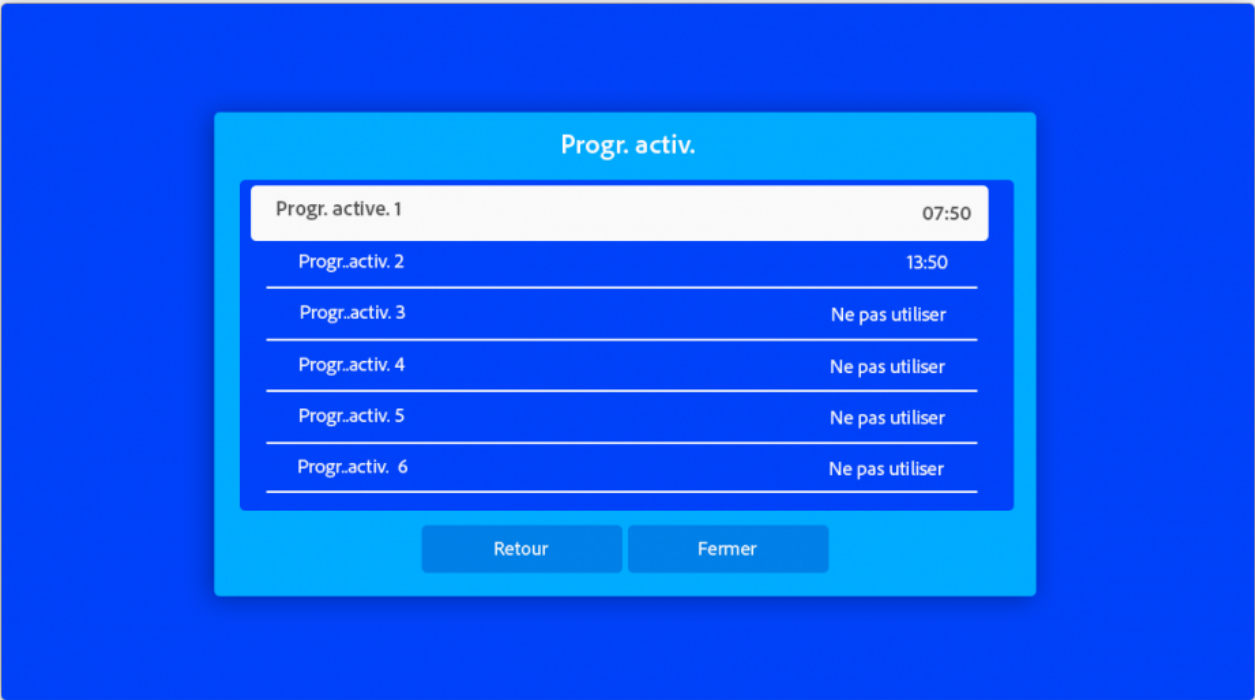

14 - Power Settings

Press MENU, navigate to System > Power Settings.

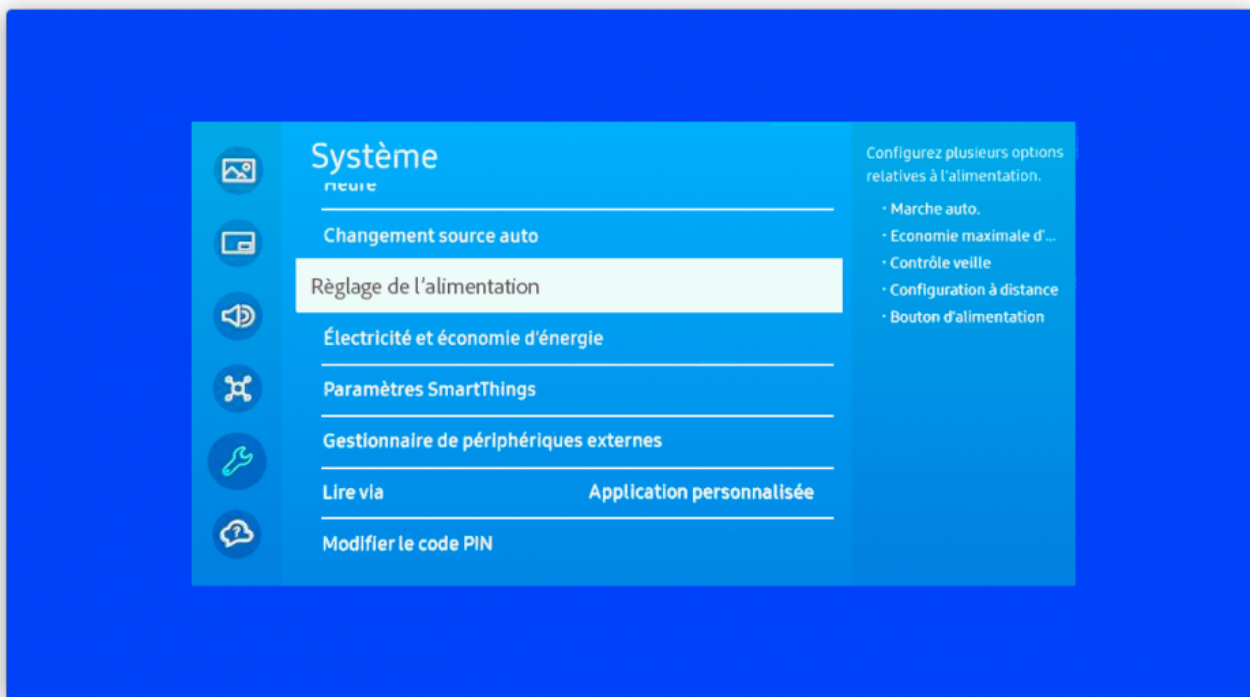

Enable the settings as shown in the image.




□ Configuration is complete!


A solid blue rectangular screen with the text "Samsung Smart Signage est désormais prêt à l'emploi." centered in white.

Samsung Smart Signage est désormais prêt à l'emploi.

Launch the app by pressing “Home.”


Go to the “Functions” tab and select “Custom APP.”

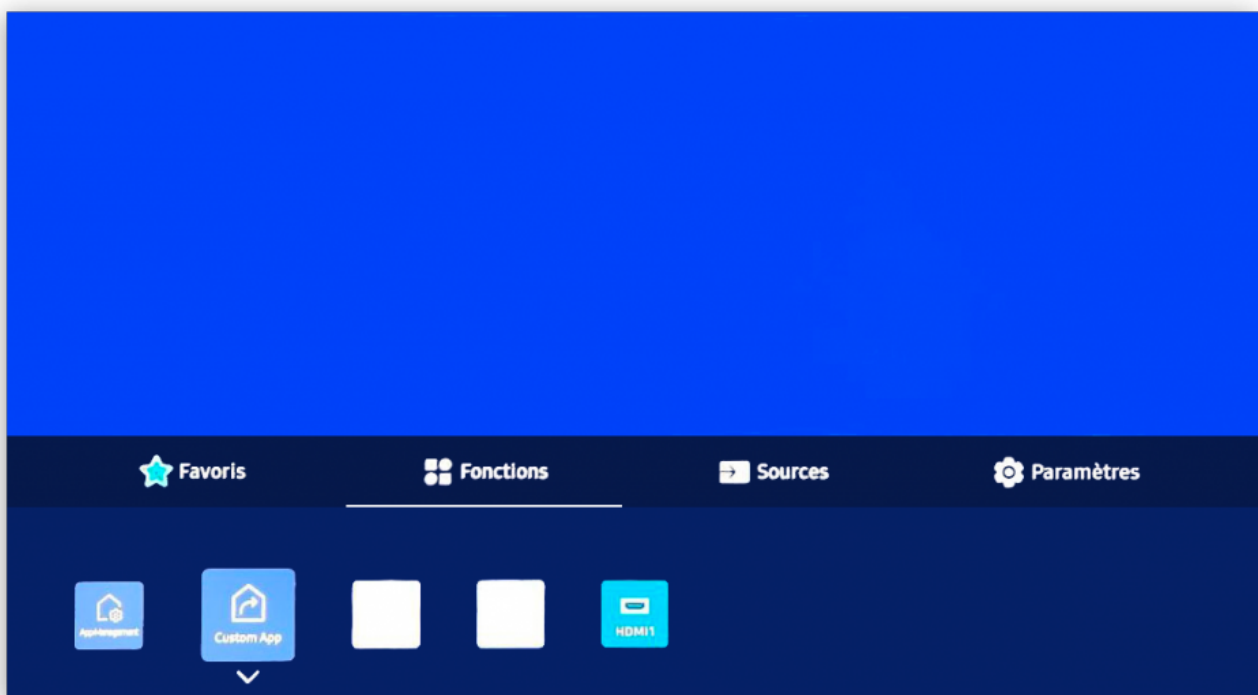

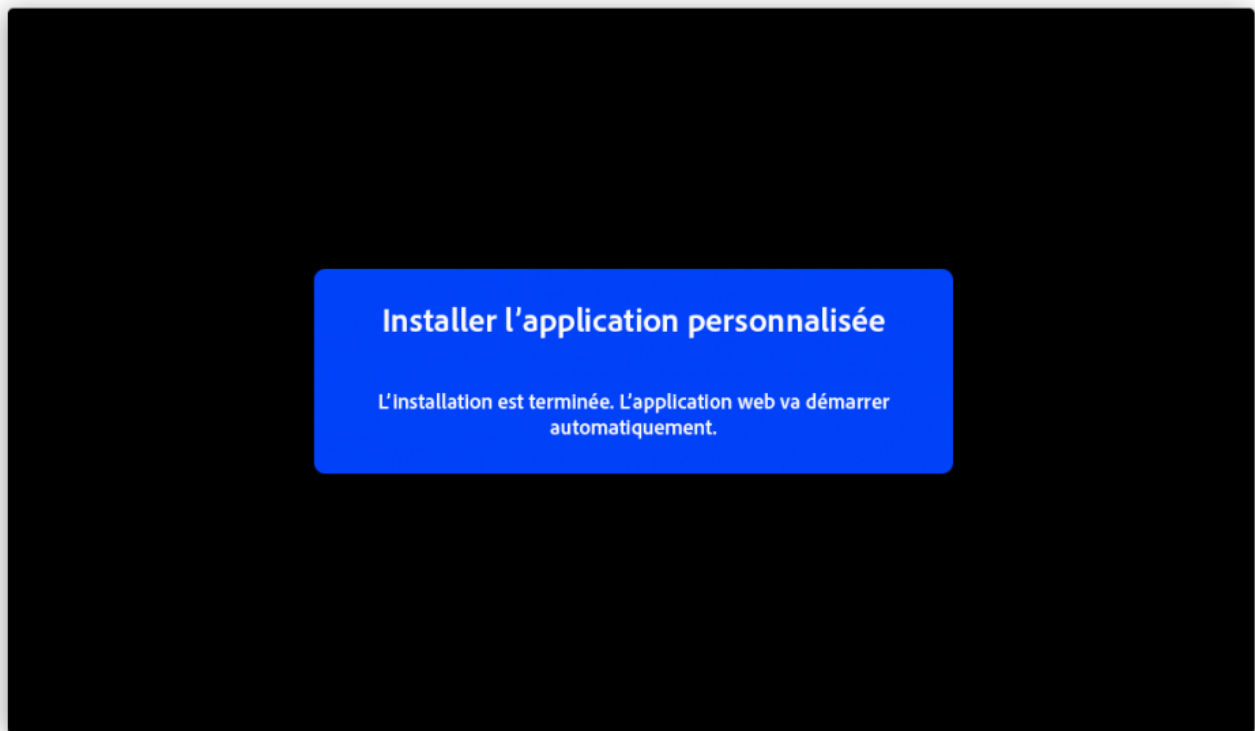

Once the app is launched, the content will be displayed.

If this setup is during an installation, the screen may request activation. Contact support if this occurs.

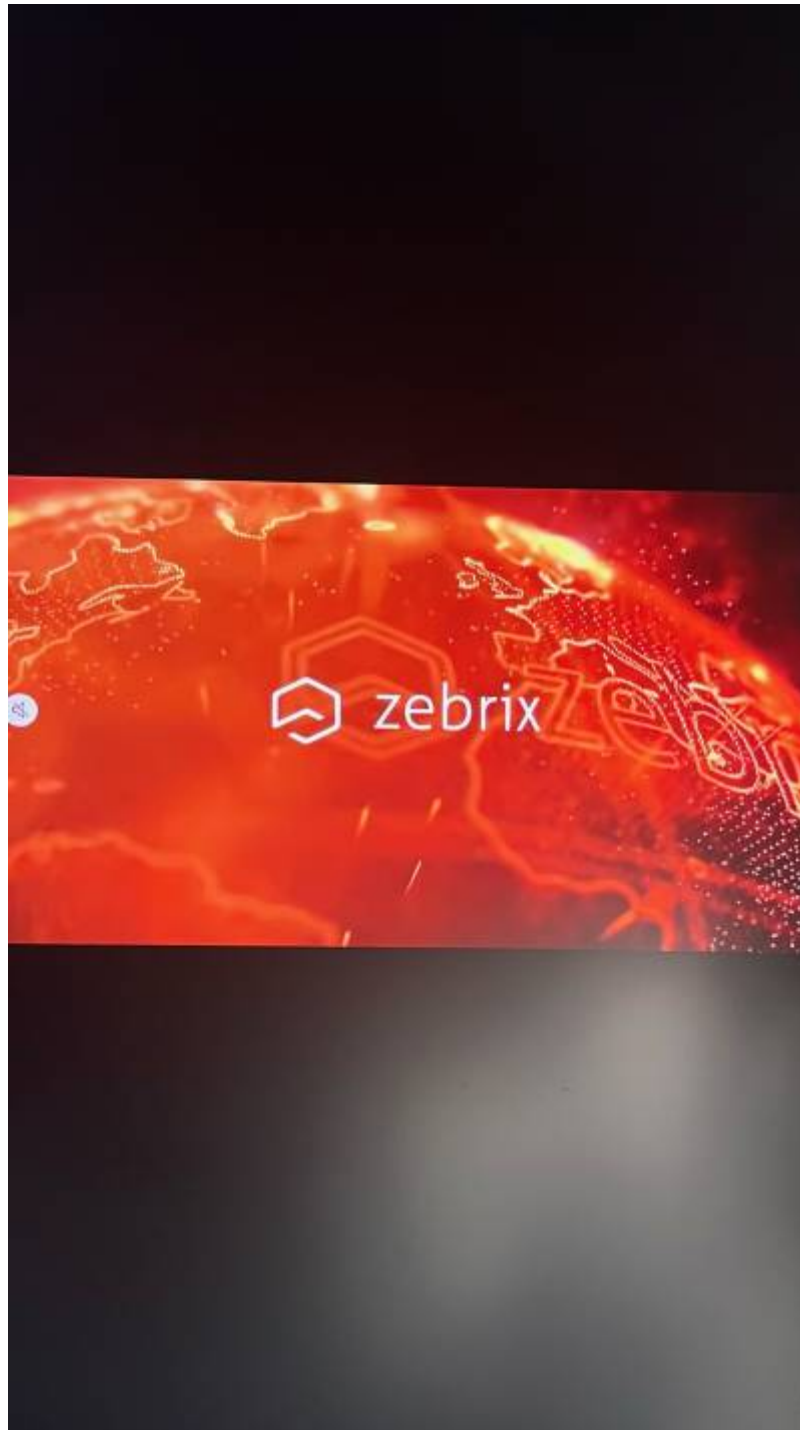

From:
<https://documentation.zebrix.net/> - **zebrix signage documentation**

Permanent link:
https://documentation.zebrix.net/doku.php?id=en:configuration_initiale_echans_tizen7&rev=1760026334

Last update: **2025/10/09 18:12**

