

New Zebrix v3 player



What is the Zebrix Player ? It is the software part of the Zebrix solution running on Samsung SSSP screens as well as on the Zebrix external players. It is the software handling for example all video playback, pages, playlists and all other content, animations sent from the Zebrix CMS that are displayed on the screens.



Version 3.0

All your screens and external players are using Zebrix players version 2.0 for now. That version being an evolution itself of the initial software 1.0 of 2014. That version has now reached a high level of maturity and stability. However, in order to better answer the incoming stakes and challenges, and to bring new innovative functionnalities, we have choose to re-create from the scratch the Zebrix player, while thinking ahead from the very beginning, of all future functionnalities our customers would need in the years to come. We decided to name that version "V3"

So, what's new in Zebrix v3

Seamless update

Right now, every content update (playlist modification or page edition contained in an ongoing playlist) forces a screen to restart playback from the begining of the playlist. But with version 3, the update is done in background, without restarting the playlist playback. The same is true for a page with a video, which will not restart from the beginning, as well as for the datasources

Offline mode fonctionnality

Version 3 downloads the schedules (with their corresponding medias, pages and playlists) in advance. All that data is stored on the screen's memory or the player's disk, allowing them to keep working as usual even without internet connexion

Advanced scheduling support on playlists

When you set advanced schedules on some elements of the playlist (e.g. that content has to be displayed only from 06/01/2019 to 08/24/2019 between 11:00AM and 2:00PM); those conditions will now be taken into account

Synchronized Playback

It is now possible to [synchroniser la lecture entre plusieurs écrans](#), with identical or different contents (But they need to have the same length).

Other

Even more innovative functionalities are coming.

Technical Prerequisites

Tizen and External Zebrix Players 19.xx

Version 3 of the Zebrix player is compatible with all SAMSUNG SSSP screen running on Tizen as well as external Zebrix players with the appropriate firmware :

Screen models	minimal firmware required
SSSPv4 (gammes PM, PH, SBB)	>= 2080.4
SSSPv5 (gammes QBH, QMH, QHH, DBJ)	>= 2060.7
SSSPv6 (gammes QMN, QBN, SBB)	>= 1140.5
SSSPv6 (gammes OMN)	>= 2031.0
Players externes zebrix	>= 19.xx

What about SSSPv1, v2, v3 ?



SSSPv1, v2 et v3 screens do not support Zebrix player version 3. Therefore, they will keep on working on the actual version 2.0 which will still be supported by Zebrix. However, we will not add new functionalities to version 2.0 Concerned models : ME MD DB DM OMxxD DH


What about Zebrix players running on old firmwares ?

It is usually possible to update any player to the latest firmware. That operation can be done remotely in some cases or by doing a automated usb update. Please contact Zebrix support for any assistance with this (support@zebrix.net / 03 20 41 59 69).

How to switch a screen or a player from version 2 to version 3

Easier method : From the Zebrix CMS, for a player or a screen.

- Vérifier que le(s) écran(s) ou le(s) player(s) dispose(nt) bien de la version minimale du firmware recommandé, si pas, mettre à jour le firmware avant de passer à l'étape suivante. Dans la rubrique « ÉCRANS », sélectionner un ou plusieurs écrans/player.
1. Cliquer ensuite sur le bouton « Outils matériel » dans la barre d'outils. Dans l'onglet « Options », activer le « Lecteur zebrix v3 ». Le(s) équipement(s) sélectionné(s) vont redémarrer et passer sur le nouveau lecteur v3.

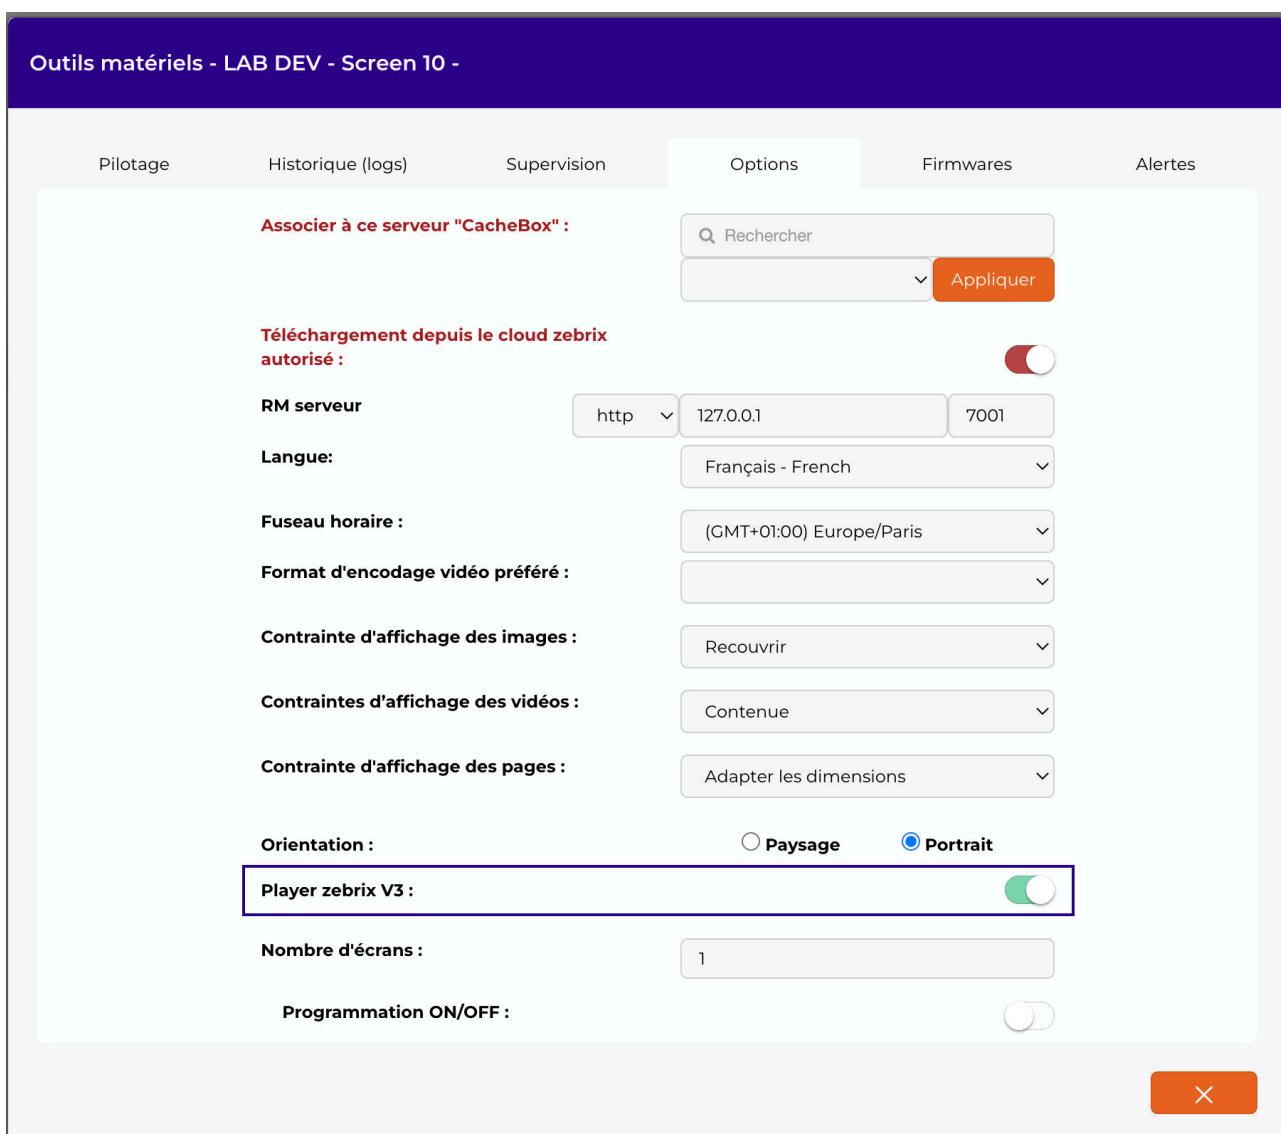

Last update:

2020/06/22 en:zebrix_software_player_v3 https://documentation.zebrix.net/doku.php?id=en:zebrix_software_player_v3&rev=1570443409
11:53

- Après le reboot, il est possible de vérifier que le player est bien passé en version 3 dans l'onglet "Monitor" (Supervision)

Hardware Tools - [] [] []

Remote	Logs	Monitor	Properties	Firmwares
Last update	[REDACTED]		Subnet Mask	[REDACTED]
ID	[REDACTED]		Default gateway	[REDACTED]
zebrix version	[REDACTED] V3		DNS Server	[REDACTED]
IP	[REDACTED]		Interface	[REDACTED]
Port	[REDACTED]		Remote management	[REDACTED]
Uptime	[REDACTED]		Zebrix player V3	<input checked="" type="checkbox"/>
Temperature	[REDACTED]		Manufacturer	[REDACTED]

Sur un écran Tizen

- Vérifier que l'écran dispose bien de la version minimale du firmware recommandé, si pas, mettre à jour le firmware avant de passer à l'étape suivante.
- Dans l'URL du serveur zebrix, modifier screenv2 en screenv3.

Par exemple :

- <http://screenv2.zebrix.net> ⇒ <http://screenv3.zebrix.net>
- <https://screenv2.zebrix.net:6002> ⇒ <https://screenv3.zebrix.net:6002>

1. Rebooter l'écran

Sur un player externe zebrix



- Vérifier que l'écran dispose bien de la version minimale du firmware recommandé, si pas, mettre à jour le firmware avant de passer à l'étape suivante.
- Dans l'URL du serveur zebrix, modifier screenv2 en screenv3. Par exemple :
 - <http://screenv2.zebrix.net> ⇒ <http://screenv3.zebrix.net>
 - <https://screenv2.zebrix.net:6002> ⇒ <https://screenv3.zebrix.net:6002>
- 1. Editer manuellement le fichier configuration pour activer le lecteur v3 : édition du fichier zebrix.conf et passage du paramètre OFFLINE_MODE à true
- 2. Rebooter le player externe

From:
<https://documentation.zebrix.net/> - **zebrix documentation**

Permanent link:
https://documentation.zebrix.net/doku.php?id=en:zebrix_software_player_v3&rev=1570443409

Last update: **2020/06/22 11:53**

