


## Restricting external access to a Tizen screen

It is possible to control several security parameters on the Tizen screens: disabling USB ports, setting a PIN code, disabling the power button, etc... To access those parameters, go to Menu > System > Security, the default PIN code is 0 0 0 0.

This guide details each security function of the Tizen screens, some options will not be available depending on the model of your screen, do not hesitate to send us a notice if you discover a lack.


Please note that if you use a personalized PIN code, you will be the only person able to unlock the screen. If you forget it, the only possibility is a full reset of the screen.

### Safety Lock On

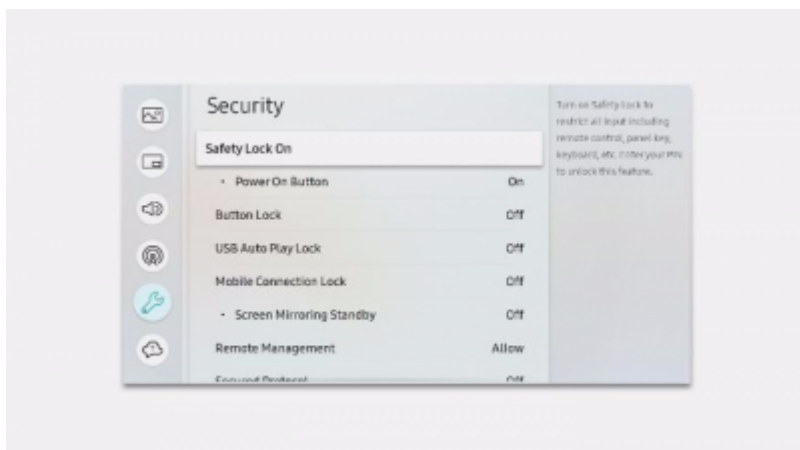


If you activate this option, all operations with the remote control will ask for a confirmation of the PIN code.

### Power On Button

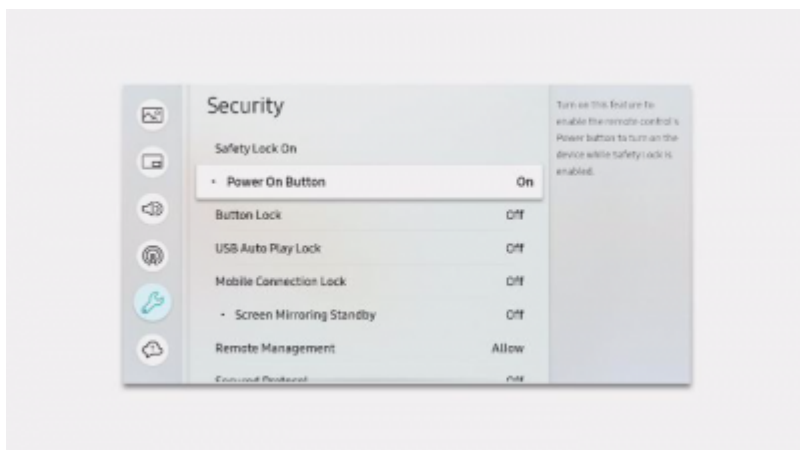


If this function is activated, you will no longer be able to turn on the screen via the remote control if the screen goes into standby mode.

## Button Lock

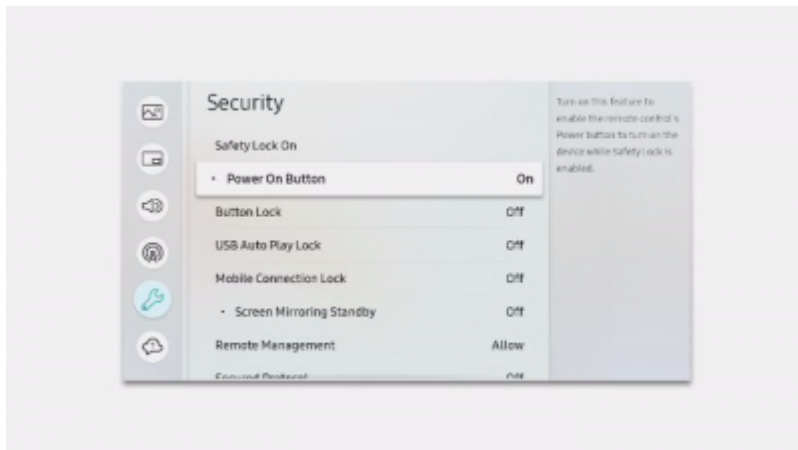


This option allows you to enable or disable the physical button on the screen

## USB Auto Play Lock

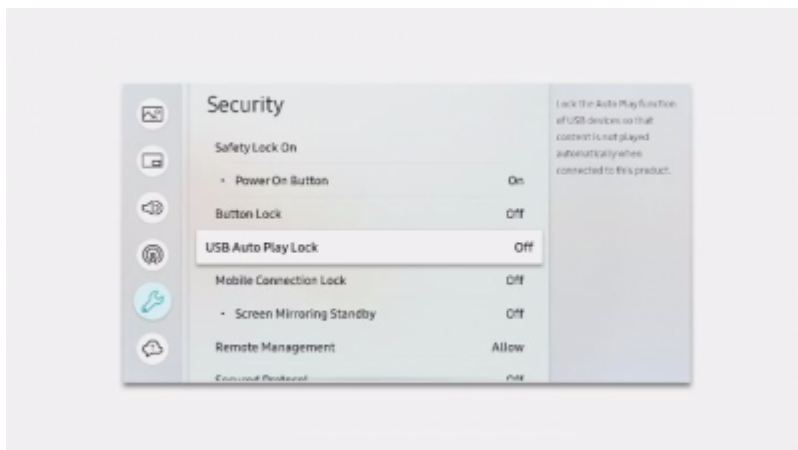

This option allows you to enable or disable auto playback when connecting a USB flash drive. (in MagicInfo)

## Mobile connection lock

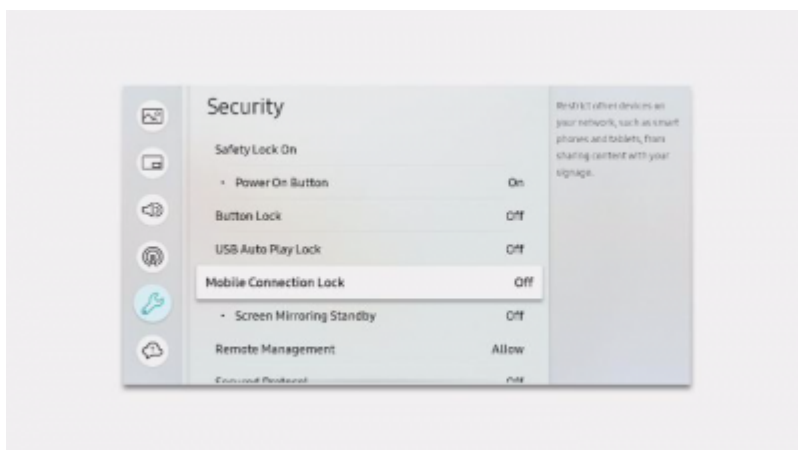


This option allows you to activate or not, the control of the broadcast by Screen Mirroring (smartphone, etc).

## Touch control locks


This option allows you to disable the touch panel if your device is compatible.

## Screen Mirroring standby

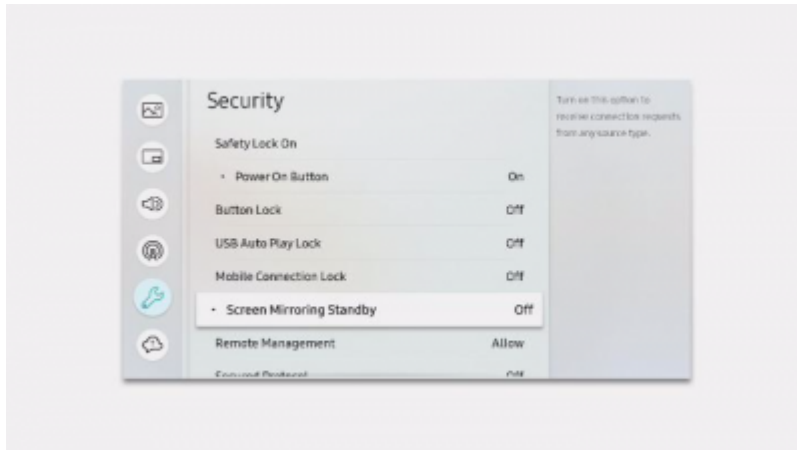


This option allows you to allow or disallow the resumption of old when the device is driven by Screen Mirroring (smartphone)

## Remote management

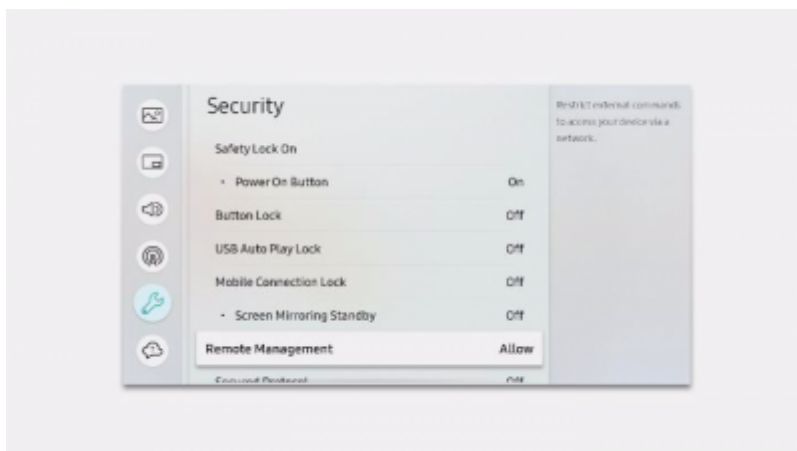


This option must be set to "Allow" to allow Zebrix to work properly.

## Secured protocol

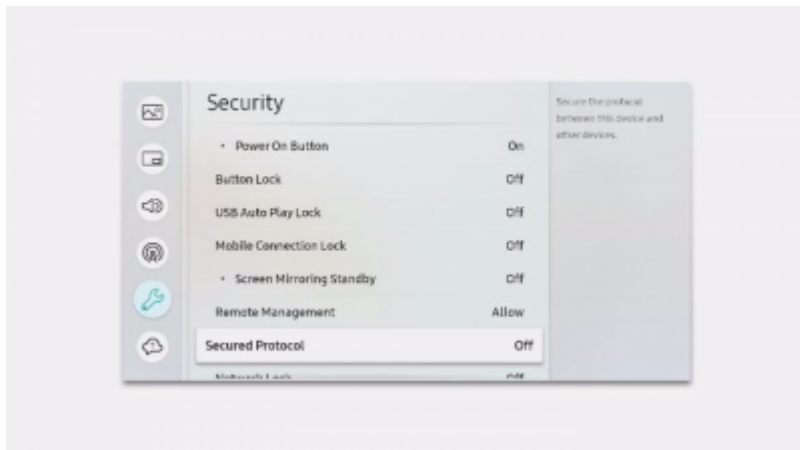


Secures the protocols between the screen and other peripherals.

### Network lock

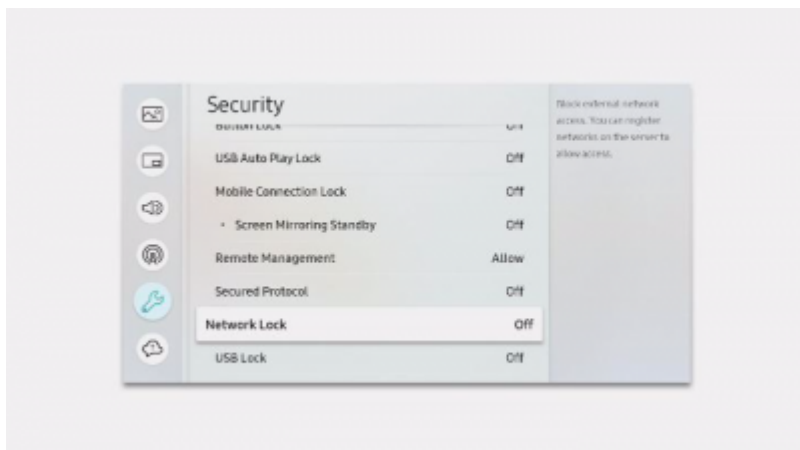

This option allows you to allow or disallow connection to networks other than the currently active one.

### Usb lock

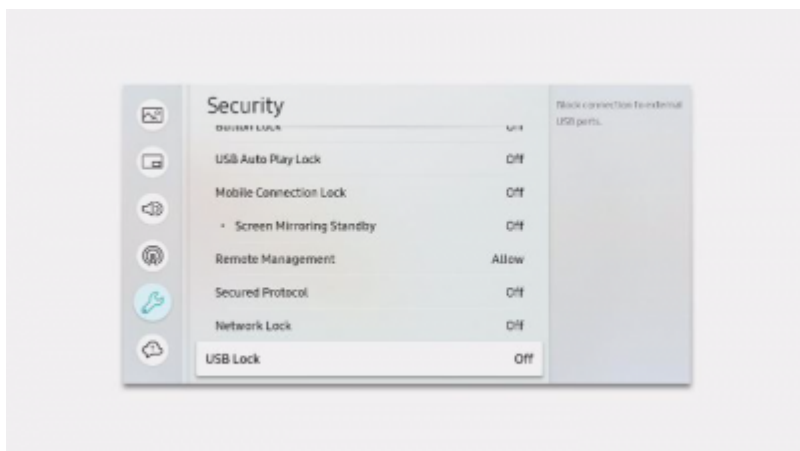

This option allows you to enable or disable power to the screen's USB ports, note that to use a USB keyboard you will need to disable the lock.

From:  
<https://documentation.zebrix.net/> - **zebrix documentation**

Permanent link:  
[https://documentation.zebrix.net/doku.php?id=en:restricting\\_external\\_access\\_to\\_a\\_tizen\\_screen&rev=1629880175](https://documentation.zebrix.net/doku.php?id=en:restricting_external_access_to_a_tizen_screen&rev=1629880175)

Last update: **2021/08/25 10:29**

