

Zebrix on Innes Players

How do I install zebrix on an innes player?

- Connect the player to the network using an ethernet cable
- Connect the player to a screen
- The screen should display a test card containing network information

Installation via the WebUI:

- Connect using an Internet browser with the address ipV4 or ipV6 to access the WebUI (e.g. <http://10.10.10.10/admin>)
- Enter the login and password: (admin / admin)
- Go to "Configuration" then "App"
- Select "Third Party" then "Pull Webdav"
- Enter the URL : <http://screen.zebrix.net> and enter 23:59:59 for the "heartbeat"
- Click on "Validate",
- Do not restart the player immediately
- Go to the "Maintenance" tab, then to "Test card".
- Deactivate test card
- Then restart the device using the button at top right

Installation via USB key:

- Download the configuration script:
- Format the USB key in FAT32
- Inject the script into the USB key, then into the player



The screen must display the test card before you can inject the configuration script.

The player restarts, and the Zebrix solution is launched.

Player version update :


- Enter the WebUi address on browser (corresponding to the player's ip)
- Go to "Maintenance" then "Middleware".
- Download zip file
- Unzip it, then take the file and put it in the drop box
- Restart the player

DMB400 Limitations:

- PIP does not work in portrait mode


DMB300 Limitations:

- Only one video supported
- PIP doesn't work

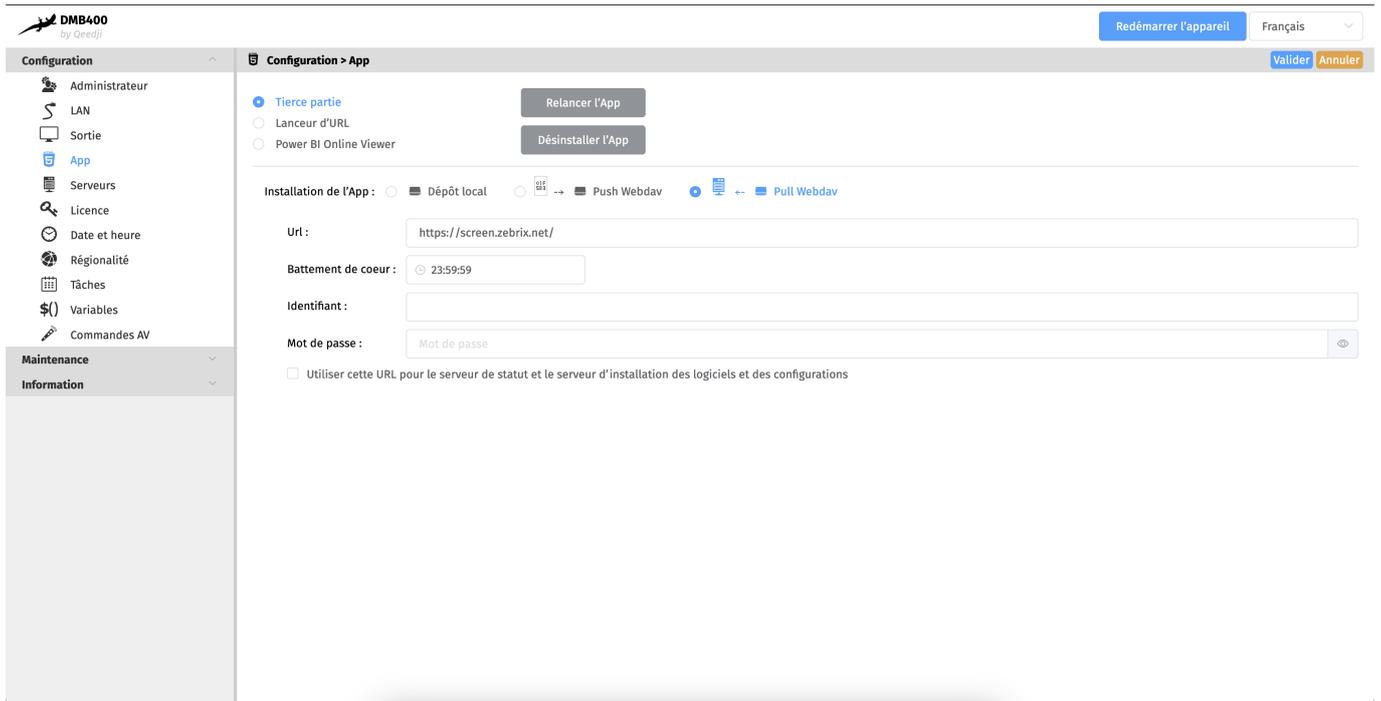

The screenshot shows the DMB400 configuration interface. The top bar includes the logo 'DMB400 by Gekoff', a 'Redémarrer l'appareil' button, and a language dropdown set to 'Français'. The left sidebar is divided into 'Configuration' and 'Maintenance' sections. The 'Configuration' section is expanded to show 'App'. The main content area is titled 'Configuration > App' and contains the following elements:

- Buttons: 'Relancer l'App' and 'Désinstaller l'App'.
- Radio buttons for installation type: 'Tierce partie' (selected), 'Lanceur d'URL', and 'Power BI Online Viewer'.
- Installation method options: 'Dépôt local', 'Push Webdav', and 'Pull Webdav' (selected).
- Form fields: 'Url' (https://screen.zebrix.net/), 'Battement de coeur' (23:59:59), 'Identifiant', and 'Mot de passe' (with a toggle for visibility).
- Checkbox: 'Utiliser cette URL pour le serveur de statut et le serveur d'installation des logiciels et des configurations'.

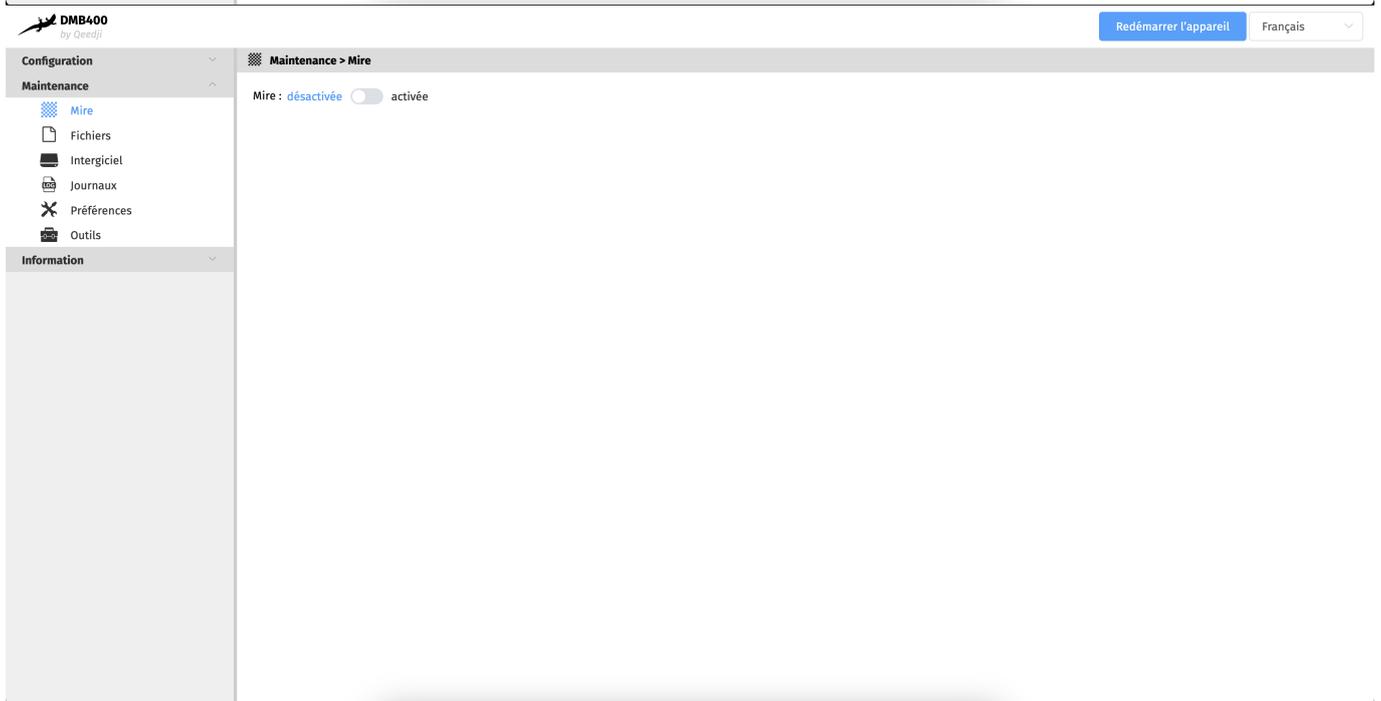

The screenshot shows the DMB400 configuration interface. The top bar includes the logo 'DMB400 by Gekoff', a 'Redémarrer l'appareil' button, and a language dropdown set to 'Français'. The left sidebar is divided into 'Configuration' and 'Maintenance' sections. The 'Maintenance' section is expanded to show 'Mire'. The main content area is titled 'Maintenance > Mire' and contains the following element:

- Toggle switch: 'Mire: désactivée' (selected) / 'activée'.

DMB400 by Qeedji

Redémarrer l'appareil Français

Configuration Maintenance > Intergiciel

Maintenance

- Mire
- Fichiers
- Intergiciel
- Journaux
- Préférences
- Outils

Information

Intergiciel : Gekkota OS - 5.11.10

Sélectionner un intergiciel pour mettre à jour votre appareil :

↓

Déposer le fichier ici ou cliquer pour en ajouter un

From: <https://documentation.zebrix.net/> - **zebrix documentation**

Permanent link: https://documentation.zebrix.net/doku.php?id=en:zebrix_on_innes_players&rev=1696326771

Last update: **2023/10/03 11:52**

