

Factory Reset Procedure on SSSP Screen

Step 1

If the screen is not powered on, turn it on. Take the remote control, choose the HDMI Source, and confirm with the "OK" button on the remote.





Step 2


First, press the “Power Off” button on the remote.

Then press the following key combination: “Mute” followed by the numeric keys: “1”, “8”, and “2”, then press the power button (red).




Step 3

Once the key combination is entered, a menu will appear: select "Option".

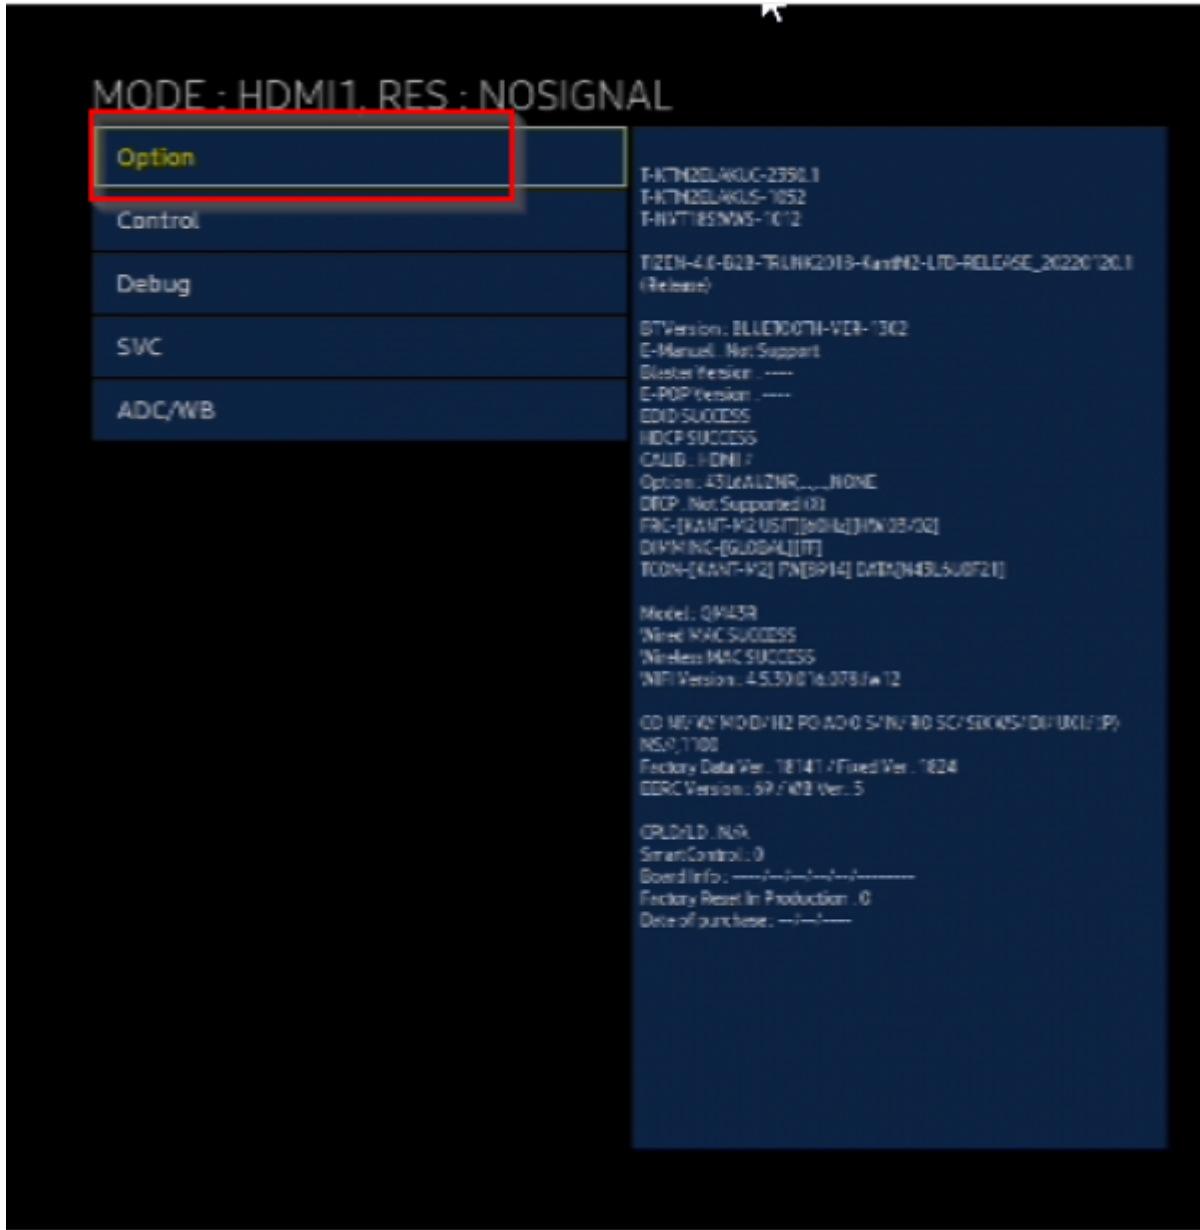


Step 4

Then select "Factory reset".

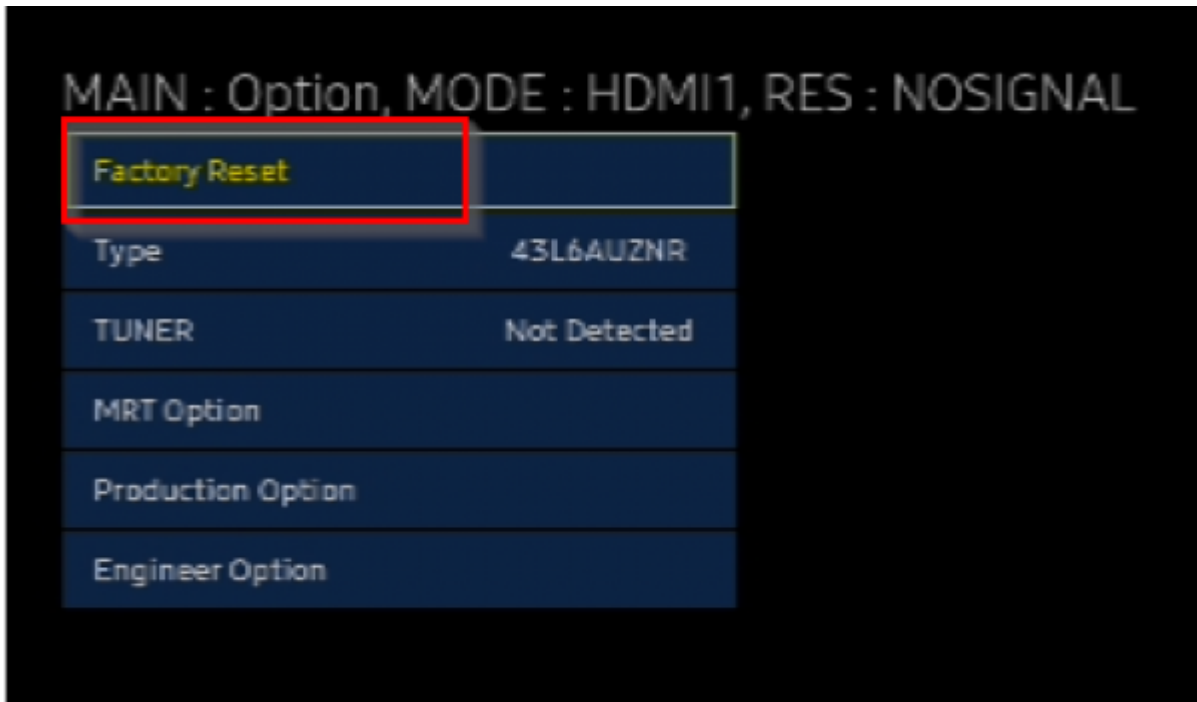

And again, select "Factory reset".

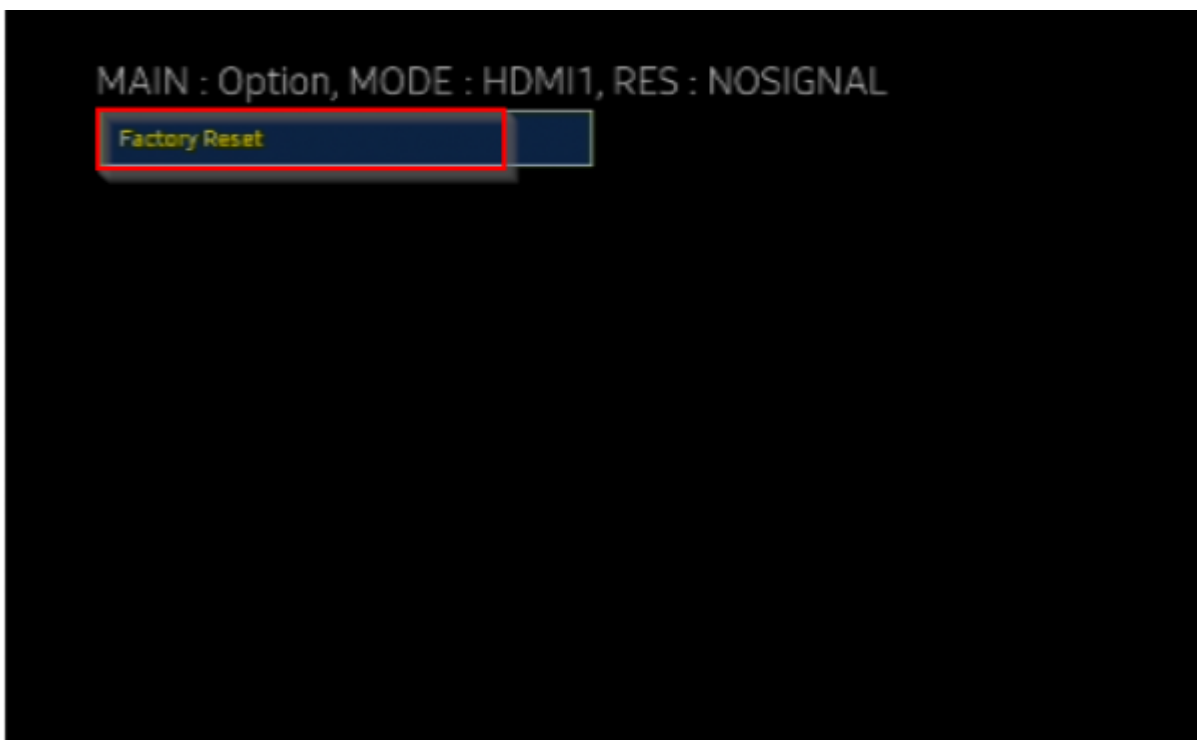

The screen should turn off after completing this operation.

Turn the screen back on using the "Power On" button.



If the procedure was completed correctly, the setup assistant will appear.

From:
<https://documentation.zebrix.net/> - **zebrix documentation**

Permanent link:
https://documentation.zebrix.net/doku.php?id=en:reset_usine_ecran

Last update: **2025/10/14 14:19**

